GGG-E-00926c(GSA-FSS)
March 14, 1968
INTERIM REVISION OF
Fed. Spec. GGG-E-926b
September 18, 1963

# INTERIM FEDERAL SPECIFICATION

## EXTRACTOR; COTTER PIN

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20405, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification GGG-E-926b, dated September 18, 1963.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers an extractor for removing cotter pins wherever they are used as locking devices.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity which are available, but only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Type. The cotter pin extractor shall be of one type as hereinafter specified.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein:

Federal Standard:
Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:
MIL-H-15424 - Hand Tools, Packaging of.



Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Illustration. The illustration shown herein is for the convenience of identification, and is not intended to exclude the purchase of an extractor which is otherwise in accordance with this specification.

3.2 Material. The cotter pin extractor shall be of forged steel, heat treated to withstand the tests specified in 4.4.

3.3 Design. The handle portion of the extractor shall be square, hexagonal, or octagonal in cross section and shall be not less than 5/16 nor more than 3/8 inch across the flats. The overall length shall be not less than 6 nor more than 10 inches when measured as shown in figure 1. One end of the extractor shall be of circular cross section for a length of 2 inches, plus or minus 1/2 inch. This portion shall taper from the nominal diameter of the handle to a point, the diameter of which shall be not less than 0.0312 inch nor more than 0.0468 inch. The opposite end shall be shaped and properly ground in the form of a chisel. The ends shall be curved in opposite directions (see figure 1) to a radius of 1-1/2 inches, plus or minus 1/16 inch.

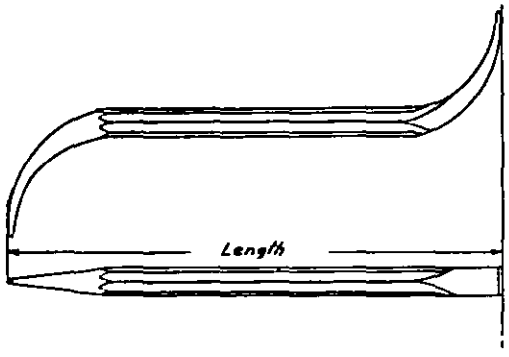



FIGURE 1. Cotter pin extractor. (See 3.3 for optional body design.)

3.4 Hardness. Each end of the extractor shall be suitably hardened and tempered to show a Rockwell C reading of not less than 30 nor more than 47 when tested as specified in 4.4.1. Reading shall be taken 1/8 inch back from each end.

3.5 Finish. Extractors shall be smoothly finished and free from burrs, fins, cracks, flash, or any other imperfections that might impair serviceability. Extractors shall be plated, painted, or otherwise treated to resist corrosion.

3.6 Marking. Each extractor shall be plainly and permanently marked with the manufacturer's name, or with a trademark of such known character that the source of manufacture may be readily determined.

3.7 Workmanship. Workmanship shall be first class in every respect.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.



Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedure. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table I.

TABLE I. Sampling data

| Category | Sample unit | Inspection level | Acceptable quality level | AQL expressed in terms of | Reference |
|---|---|---|---|---|---|
| Visual examination | 1 each | II | 4.0 | Defects per hundred units | 4.3.1 |
| Dimensional examination | 1 each | S-4 | 2.5 | Defects per hundred units | 4.3.2 |
| Testing | 1 each | S-3 | 1.5 | Defects per hundred units | 4.4 |
| Preparation for delivery | 1 container | S-2 | 4.0 | Defects per hundred units | 4.5 |

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, material, finish, and marking.

4.3.2 Dimensional examination. Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Testing.

4.4.1 Hardness test. Two test files having a Rockwell C hardness of 30/31 and 46/47 shall be used for performing this test. The 30/31 file shall glide over the surface without cutting or abraiding. The 46/47 file shall abraid or bite into the material. If both of the above conditions exist when performing the test, the extractor shall be considered as passing the hardness test.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table III. For examination of interior packaging, the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Defects of closure listed shall be examined on shipping containers fully prepared for delivery.

TABLE II. Classification of preparation for delivery defects

| | |
|---|---|
| Markings (exterior and interior) | Omitted; incorrect; illegible; improper size, location, sequence, or method of application. |
| Materials | Any component missing or damaged. |
| Workmanship | Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container. |



Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Cleaning, preservation, packaging, and packing. Cotter pin extractors shall be cleaned, preserved, packaged, and packed in accordance with MIL-H-15424. The level of cleaning, preservation, and packing shall be level A or C, and the level of packing level A, B, or C, as specified (see 6.1).

5.1.1 As part of the requirements of section 5 of this specification, table III is considered as a part of table I of MIL-H-15424.

TABLE III. Preservation and quantity per unit and intermediate package and shipping container

| Item | Type preservative of specification MIL-P-116 unless otherwise specified (see note 7) | Method of preservation (unit protection) Specification MIL-P-116 | Items per unit package (see 3.3.1.6) | Number of unit packages per intermediate container | Number of intermediate containers or unit packages per shipping container | Items per shipping container |
|---|---|---|---|---|---|---|
| Col. 1 | Col. 2 | Col. 3 | Col. 4 | Col. 5 | Col. 6 | Col. 7 |
| Extractor cotter pin | P-1 or grade 4 of MIL-C-16173 | I | 12 | 4 | 6 | 288 |

5.2 Marking.

5.2.1 Civil agencies. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military agencies. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following data in procurement documents:

(a) Title, number, and date of this specification.
(b) Selection of applicable level of cleaning, preservation, packaging, and packing required (see section 5).



GSA DC 68-13996

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.