GGG–P–840a
January 18, 1963
SUPERSEDING
Fed. Spec. GGG-P-840
February 8, 1955

FEDERAL SPECIFICATION

PUNCHES AND DIES, AND PUNCH AND DIE SETS—METAL CUTTING, HAND; AND PUNCH, CLIP, SHEET METAL

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers hand-operated, portable punches which are plier-like tools used for punching holes of various sizes in mild sheet steel.

1.1.1 *Federal specification coverage.* This specification does not cover all types and classes of punches, but only those generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types and classes.* The punches shall be of the following types and classes, as specified (see 6.2):

Type I.—Circular.

Class 1.—Light duty.

Class 2.—Heavy duty.

Type II.—Clip.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification.

Federal Specifications:

PPP-B-566—Boxes, Folding, Paperboard

PPP-B-585—Boxes, Wood, Wirebound.

PPP-B-591—Boxes, Fiberboard, Wood-Cleated.

PPP-B-601—Boxes, Wood, Cleated-Plywood.

PPP-B-621—Boxes, Wood, Nailed and Lock-Corner.

PPP-B-636—Box, Fiberboard.

PPP-B-665—Boxes, Paperboard, Metal Stayed (including Stay Material).

PPP-B-676—Boxes, Set-Up, Paperboard.

PPP-T-76—Tape, Pressure-sensitive Adhesive Paper, Water Resistant, (for Carton Sealing).

PPP-T-97—Tape, Pressure-sensitive Adhesive, Filament Reinforced.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.

Fed. Std. No. 123—Marking for Domes-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

tic Shipment (Civilian Agencies).

Fed. Test Method Std. No. 151—Metals, Test Methods.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specifications:

MIL-P-116—Preservation, Methods of.

MIL-B-10377—Box: Wood-Cleated, Veneer, Paper Overlaid.

MIL-L-10547—Liners, Case, Waterproof.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.

MIL-STD-130—Identification Marking of U. S. Military Property.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

National Bureau of Standards Handbook:

H28—Screw-thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D. C.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations shown herein are descriptive and not restrictive and are included for the convenience of requisitioning and purchasing officers and manufacturers, but are not intended to preclude the purchase of tools which are otherwise in accordance with this specification.

3.2 Material. The material shall be as specified herein. All forgings shall be of uniform quality, free from defects, imperfections, flash, and irregular or sharp projections and edges. Tools shall be capable of withstanding the tests specified in 4.3.

3.3 Hardness

3.3.1 *Male and female dies.* Male and female dies shall be hardened and tempered to a hardness of not less than 55 nor more than 62 on a Rockwell C scale (4.3.1).

3.3.2 *Bolts, nuts, screws, and rollers.* Bolts, nuts, screws, and rollers used in the assembly of the punch shall be properly hardened and tempered to resist wear and shear.

3.4 Interchangeability of parts. All parts having the same manufacturer's part number shall be constructed to definite standards, tolerances, and clearances in order that such parts may be completely interchangeable or may be adjusted without requiring modification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.5 Screw threads. Screw threads on punches and dies shall be smoothly finished having a class 3 or modified class 3 fit and shall be in accordance with Handbook H28.

3.6 Identification marking. Punches shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined. For military use marking shall be in accordance with MIL-STD-130, as applicable.

3.7 Type I, circular. The punch shall consist essentially of an operating lever, intermediate lever or toggle joint arrangement, frame, side linkage, male die, female die, and key. The punch shall be designed to accomplish the following:

(*a*) Punch various size round or irregular-shaped holes by normal hand operation.

(*b*) Accomplish the punching operation with a minimum of effort.

(*c*) Provide for quick changing of the dies.

(*d*) Transmit the punching force through levers and rollers or a lever and toggle joint connected by a series of bolts or screws placed at specific points between the male die and point of pressure on the operating lever.

(*e*) Preclude the possibility of the operating lever beng closed beyond the effective punching point, eliminating pinching the hands of the operator.

(*f*) Provide a male die-holder assembly with either a slip-on or a screw-on device for accepting the male dies.

(*g*) Provide proper clearance between the dies to produce a smooth, straight, and true-size hole.

3.7.1 *Operating lever.* The operating lever shall be of drop-forged steel, proportionately shaped, of sufficient length and strength capable of transmitting the required force to the punch through the intermediate lever or toggle-joint arrangement. The operating lever shall be provided with a comfortable and adequate handgrip.

3.7.2 *Intermediate lever or toggle joint arrangement.* The intermediate lever or toggle-joint arrangement shall be of either drop-forged steel or shall be fabricated from good-quality steel proportionately shaped. Means shall be provided for proper assembly to insure smooth and easy working of the punch.

3.7.3 *Frame.* The frame shall be of drop-forged steel, proportionately shaped, haveing a suitable gap opening, depth of throat, and a handle of sufficient length and strength. Means shall be provided in the portion of the frame above the throat for acceptance of the various size male dies and assembly of the side linkage. The portion of the frame below the throat shall be provided with a threaded hole to engage the thread of the female die. The dies, when assembled in the frame above and below the throat, shall be in proper alignment and perpendicular to the throat. The handle shall be provided with a comfortable and adequate handgrip.

3.7.4 *Side linkage.* The side linkage shall be of either drop-forged steel or of good-quality cold-rolled steel. The side linkage shall be fastened to the frame and levers in such a manner as to preclude the possibility of misalignment of the dies working in the frame.

3.7.5 *Male die.* The male die shall be of high-grade tool steel and shall have a center point concentric within 0.002-inch-total indicator reading with the body and male die end. The body and end of the male die shall be smoothly machined or ground. Means shall be provided on the body of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

die to engage the die-holder assembly.

3.7.6 *Female die.* The female die shall be of high-grade tool steel. The outer surface of the dies shall be threaded to engage the threaded hole in the frame below the throat opening. The female dies shall be provided with a hole and a slightly larger hole a suitable distance below the cutting edge for clearance of the slugs. The hole in the female dies shall be smoothly finished and concentric within 0.002 inch total indicator reading with the thread on the outer surface. The bottom of the dies shall be slotted to accept the key for adjustments.

3.7.7 *Key.* The key shall be of good-quality steel, and shall be designed to engage the key slot in the dies for making proper adjustments.

3.7.8 *Bolts, nuts, screws, and rollers.* Bolts, nuts, screws, and rollers shall be of good-quality steel and shall be smoothly machined to fit into the assembly of the punch without either binding or excessive play. They shall be properly assembled and adjusted to insure smooth and easy working of the punch. Means shall be provided to preclude the possibility of the nuts becoming loose under normal working conditions.

3.7.9 *Class 1, light duty.* Class 1 punch shall be provided with an adjustable-depth gage. Means shall be provided on the side of the frame for location of the gage and a knurled-head screw to fasten the gage in place.

3.7.9.1 *Adjustable-depth gage.* The adjustable-depth gage shall be of good-quality sheet steel. The gage shall have one end bent into the throat and shall be adjustable the length of the throat.

3.7.9.2 Class 1 punches shall be similar to figure 1 and shall have a depth of throat of 1-¾ inches, plus or minus ⅛ inch, and an overall length of 8-⅜ inches, plus or minus ⅛ inch. Class 1 punches shall be capable of punching ¼-inch round holes in 16-gage (0.0598-inch) mild sheet steel. The punches shall be provided with one or a combination of male and female dies, as specified (6.2), capable of punching round holes of 1/16-, 5/64-, 3/32-, 7/64-, 1/8-, 9/64-, 5/32-, 11/64-, 3/16-, 13/64,- 7/32-, 15/64-, 1/4-, 17/64-, and 9/32-inch diameter.

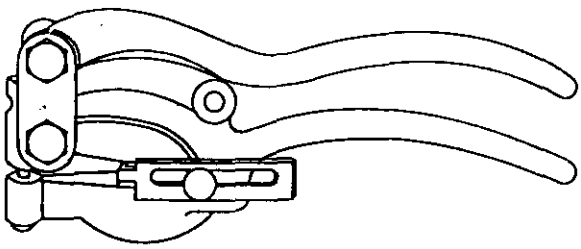


FIGURE 1.—Type I, class 1, circular punch, light duty.

3.7.10 *Sets.* Metal punch sets, when required (6.2), shall consist of a punch and several male and female dies, and shall conform to the requirements of the respective items of class 1. Each set shall be furnished in a metal case having provision to accommodate the punch and components with individual holding places for the dies. Cases for sets shall be of sheet metal and shall be of durable and rigid construction. The case shall be equipped with a hinged cover and a suitable locking device. The case shall be painted or enameled on the inside and outside to prevent corrosion. An instruction sheet containing clear and concise information as to the proper operation of the punch shall be attached to the inside of the case.

3.7.11 *Class 2 punch, heavy duty.* Class 2 punches shall be similiar to figure 2 and shall have a minimum depth of throat of 1-11/16 inches and a minimum overall length of 23 inches. The mechanical advantage and the method of design of class 2 punches shall be such that the punch shall be capable of punching 1/4-inch round holes in 1/4-inch mild sheet steel and 1/2-inch round holes in 1/8-inch mild sheet steel. Class 2 punches

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

shall be provided with one or a combination of male and female dies, as specified (6.2), capable of punching round holes of 3/32-, 7/64-, 1/8-, 9/64-, 5/32-, 11/64-, 3/16-, 13/64-, 7/32-, 15/64-, 1/4-, 17/64-, 9/32-, 19/64-, 5/16-, 21/64-, 11/32-, 23/64-, 3/8-, 25/64-, 13/32-, 27/64-, 7/16-, 29/64-, 15/32-, 31/64- and 1/2- inch diameter.

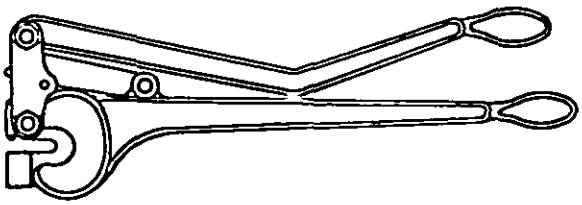


FIGURE 2.—Type I, class 2 circular punch, heavy duty.

3.8 **Type II, clip punch.** Type II clip punch shall be similar to figure 3, and shall consist essentially of an operating lever, intermediate lever or toggle joint arrangement, frame, side linkage, crimping plunger, plunger lever mechanism and linkage, male die, and female die. The male and female die, when assembled in the frame, shall be in proper alignment and perpendicular to the throat. The throat of the punch shall be approximately 2 inches in depth. The punch shall have a minimum length of 18 inches, and weigh approximately 8 pounds. The punch shall be designed to accomplish the following:

(*a*) To cut, punch, bend, and lock tight an ear approximately 3/16 by 5/16 inch down through three thicknesses of 20-gage (0.036-inch) mild sheet steel to fasten the seams together.

(*b*) To accomplish the punching operation smoothly, easily and with a minimum of effort.

(c) To permit easy access to cramped places.

(*d*) To transmit the punching force through levers and rollers or a lever and toggle joint connected by a series of bolts, screws, or pins placed at specific points between the male die and point of pressure on the operating lever.

(*e*) Preclude the possibility of the operating lever being closed beyond the effective punching point, eliminating pinching the hands of the operator.

(*f*) Provide a die holder assembly to accept and securely hold the male and female die.

(*g*) Provide proper clearance between the male and female die to produce a smooth, straight and true hole.

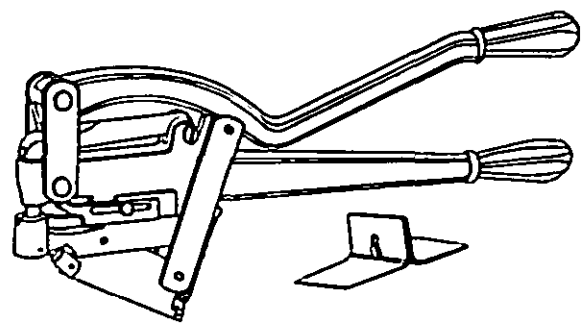


FIGURE 3.—Type II, clip punch.

3.8.1 *Operating lever.* The operating lever shall conform to the requirements specified in 3.7.1.

3.8.2 *Intermediate lever or toggle-joint arrangement.* The intermediate lever or toggle-joint arrangement shall conform to the requirements specified in 3.7.2.

3.8.3 *Frame.* The frame shall conform to the requirements specified in 3.7.3 except that the portion of the frame below the throat shall have an anvil for the crimping plunger to lock the ear tight and the female die holder shall be properly machined for accepting and holding of the die in such a manner as to insure proper alignment with the male die.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.8.4 *Side linkage.* The side linkage shall conform to the requirements specified in 3.7.4.

3.8.5 *Crimping plunger.* The crimping plunger shall be of sufficient diameter, length, and shall be fastened to the plunger lever in the proper position to push and lock the ear tight.

3.8.6 *Plunger lever mechanism and linkage.* The plunger lever mechanism and linkage shall be either drop-forged steel or of good-quality cold-rolled steel fastened to the operating lever and frame in such a manner as to crimp and lock the ear tight in the same motion used to cut the ear.

3.8.7 *Male die.* The male die shall be of high-grade tool steel and shall have a center point concentric within 0.002-inch-total indicator reading with the body and male die end. The body and punching end of the die shall be smoothly machined or ground. Means shall be provided on the body of the die to engage the dieholder assembly.

3.8.8 *Female die.* The female die shall be of high-grade tool steel. The body of the die shall be machined for acceptance in the frame below the throat opening. The hole in the female die shall be smoothly machined and concentric within 0.002-inch-total indicator reading with the outside body of the die.

3.8.9 *Bolts, nuts, screws, or pins.* Bolts, nuts, screws, or pins used in the assembly of the punch shall be of good-quality steel, machined to fit the assembly of the punch. They shall be properly assembled and adjusted to insure easy operation of the punch. Means shall be provided to preclude the possibility of the bolts, nuts, screws, or pins becoming loose under normal working conditions.

3.9 **Workmanship.** Workmanship shall be of the highest grade throughout and equal in every respect to good commercial practice. The punch shall be free from rust, burrs, fins, and any imperfection which may impair serviceability or durability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Unless otherwise specified in the contract or order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Acceptance inspection.**

4.2.1 *Lot.* All punches of the same type and class or dies of the same size shall be considered a lot for purposes of acceptance inspection.

4.2.2 *Examination.* A sample of punches or dies shall be taken at random in accordance with table I from each inspection lot of material. Each sample punch or die shall be examined to verify compliance with this specification, with lot acceptance based on the following sampling inspection requirements in accordance with MIL-STD-105. Defects shall be classified in accordance with table II. Any punch or die in the sample containing one or more defects shall be rejected, and if the number of defective punches or dies in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

TABLE I.—*Sampling for examination AQL (approx.) = 1.5 percent defective.*

Number of punches and dies in lot	Number of punches and dies in sample
40 and under	Inspection level III
41 to 300	Inspection level II
301 and over	Inspection level I

TABLE II.—*Classification of defects in accordance with MIL-STD-105.*

Categories	Defects
Critical:	
1	None defined.
Major:	
101	Type and class (if applicable) of punch not as specified.
102	Tool incomplete; component parts missing or improperly assembled.
103	Materials defective or not as specified; evidence of cracks, deep pits, heavy scale, or flash; evidence of welded or otherwise repaired castings or forgings.
104	Evidence of sticking, binding, or excessive looseness when lever (handle) is operated; bolts, nuts, screws, and pins or rollers not provided with a means to prevent their becoming loose.
105	Punches not smoothly machined and ground, not sharp, not interchangeable (type I only), or cannot be securely attached.
106	Dies defective, punch hole not smoothly finished, cutting edge not sharp, not provided with a larger hole for acceptance of slugs, die not provided with a means for adjustment, or dies not interchangeable; threads stripped, torn, cracked, crossed, drunken, or not perfect full threads (type I only).
107	Die defective, not securely attached, or cutting edges not sharp and clearly defined (type II only).
108	Punch and die not in proper alignment or not perpendicular to throat (type I only).
109	Not provided with a stop to prevent handle movement beyond the effective punching point; operating lever pinches hand.
110	Depth-gage missing, defective, or length of adjustment not as required (type I, class 1 only).
111	Depth of throat less than the specified minimum (type I only).
Minor:	
201	Tool not smoothly finished; evidence of fins, burrs, rust, rough surfaces, or sharp edges.
202	Overall length of tool not as required.
203	Depth of throat exceeds the maximum allowable (type I, class 2 only), or not as required (type II only).
204	Marking, manufacturer's name or trademark missing, illegible, incorrect, or not permanent.
205	Set (if applicable) incomplete, carrying case defective, not painted, or not as required (type I, class 1 only).
206	Weight of tool not as required (type II only).

4.2.3 *Acceptance tests.* A sample of punches or dies shall be taken at random from each lot in accordance with MIL-STD-105 at Inspection level L-7. The Acceptable Quality Level is equal to 2.5 percent defective; however all the sample sizes shall be used and the acceptance number shall be zero until the AQL permits one or greater. Each sample shall be subjected to the applicable tests specified in 4.3 to verify compliance with this specification. Any sample punch or die which does not meet the requirements for any of these characteristics shall be rejected, and if the number of nonconforming punches or dies in any sample exceeds the acceptance number for that sample, the lot represented by the sample shall be rejected.

4.3 Test procedures.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

4.3.1 *Hardness test.* Dies shall be subjected to a hardness test to determine conformance with 3.3.1. The Rockwell hardness test shall be conducted in accordance with method 243 of Fed. Test Method Std. No. 151.

4.3.2 *Punch cutting test.*

4.3.2.1 *Type I.*

4.3.2.1.1 *Class* 1, *light duty.* Class 1 punches shall be tested by punching twenty-five 1/4-inch holes in 16-gage (0.0598-inch) mild sheet steel.

4.3.2.1.2 *Class* 2, *heavy duty.* Class 2 punch shall be tested by punching twenty five 1/4-inch holes in 1/4-inch mild sheet steel.

4.3.2.2 *Type II.* Type II punch shall be tested by cutting, punching and locking 25 ears down through three thickness of 20-gage (0.036-inch) mild sheet steel.

4.3.2.3 Failure of the punch shall have occurred should the dies produce a ragged or burred hole, fail to lock the ear, break, chip, or spall, or the cutting edges of the dies become dulled to any appreciable extent.

4.4 **Inspection of preparation for delivery.** The preservation, packaging, packing, and marking of equipment shall be subjected to inspection to determine compliance with section 5 herein.

5. PREPARATION FOR DELIVERY

(Civil agencies should refer to Fed. Std. No. 102 for definitions and applications of the various levels of packaging protection for supplies and equipment.)

5.1 **Preservation and packaging.**

5.1.1 *Level A.*

5.1.1.1 *Punches.* Each punch shall be cleaned by process C-1 and preserved by method I of MIL-P-116, using a type P-2, P-4, P-5, or P-6 compound. Punches shall be individually packaged in a folding or set-up paperboard or fiber box conforming to PPP-B-566, PPP-B-676, PPP-B-665, or PPP-B-636, at the option of the contractor. Box closure shall be as specified in the applicable box specification or appendix thereto.

5.1.1.2 *Sets.* Punches and dies ordered in sets shall be cleaned, preserved, and packaged as specified in 5.1.1.1. Each complete set shall be packaged as a unit. When furnished with a metal case, each component part shall be placed in the individual holding place provided.

5.1.1.3 *Intermediate packaging.* When specified (6.2), type I punches packaged as specified in 5.1.1.1 shall be intermediate packaged in quantities of 10. Intermediate container shall conform to PPP-B-665 or PPP-B-636, at the option of the contractor. Box closure shall be as specified in the applicable box specification or appendix thereto.

5.1.2 *Level C.* Each punch or punch set shall be preserved and packaged in such a manner that will afford adequate protection against corrosion, deterioration, and physical damage during shipment from supply source to the first receiving activity for immediate use. This may conform to the supplier's commercial practice, when such meets the requirements of this level.

5.2 **Packing.**

5.2.1 *Quantity per shipping container.* The quantity per shipping container shall be as specified (6.2). When quantities are not specified the weight limitations in 5.2.2 and 5.2.3 shall apply.

5.2.2 *Level A.* Punches and punch sets, packaged as specified (6.2), shall be pack-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

ed in overseas type wood-cleated fiberboard, nailed wood, fiber, wirebound wood, wood-cleated veneer paper overlaid, or wood-cleated plywood boxes conforming to PPP-B-591, PPP-B-621 (class 2), PPP-B-636 (class 2), PPP-B-585 (class 3), MIL-B-10377 or PPP-B-601, at the option of the contractor. Shipping containers shall have case liners conforming to MIL-L-10547. Case liners shall be closed and sealed in accordance with the appendix to MIL-L-10547. Case liners for boxes conforming to PPP-B-636 may be omitted provided all corner and edge seams and manufacturer's joints are sealed with a minimum 1-1/2-inch-wide tape conforming to PPP-T-76. Boxes shall be closed and strapped in accordance with the applicable box specification or appendix thereto, except fiber boxes shall be banded with tape conforming to type III of PPP-T-97 and the appendix thereto. The gross weight of wood or wood-cleated boxes shall not exceed 200 pounds; fiber boxes shall not exceed the weight limitations of the applicable box specification. Intermediate fiber boxes conforming to class 2 of PPP-B-636, closed, sealed, and banded as specified herein, and used as the shipping container need not be overpacked.

5.2.3 *Level B.* Punches and punch sets, packaged as specified (see 6.2), shall be packed in domestic type wood-cleated fiberboard, nailed wood, wirebound, wood-cleated plywood, wood-cleated veneer paper overlaid or fiber boxes conforming to PPP-B-591, PPP-B-621 (class 1), PPP-B-585 (class 1), PPP-B-601, MIL-B-10377 or PPP-B-636 (class 1) at the option of the contractor. Box closure shall be as specified in the applicable box specification or appendix thereto. The gross weight of wood or wood-cleated boxes shall not exceed 200 pounds; fiber boxes shall not exceed the weight limitations of the applicable box specification.

Intermediate fiber boxes conforming to PPP-B-636, closed as specified herein, and used as the shipping container need not be overpacked.

5.2.4 *Level C.* Punches and punch sets, packaged as specified (see 6.2), shall be packed in containers which will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall conform to rules or regulations of carriers as applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Military agencies.* In addition to any special marking required by the contract or order, unit and intermediate packages and exterior shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2 *Civil agencies.* In addition to any special marking required by the contract or order, unit and intermediate packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

6. NOTES

6.1 Intended use.

6.1.1 Type I, classes 1 and 2 punches are primarily for use by metal-workers to punch various size holes in mild sheet steel.

6.1.2 Type II, punches are primarily for use by metalworkers to cut, punch, bend, and lock tight an ear down through sheet steel to fasten seams together.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.

(*b*) Type and class (if applicable) required (1.2.1).

(*c*) Size of dies required (3.7.9.2 and 3.7.11).

(*d*) Whether punches are required in sets (3.7.10).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

(*e*) Selection of applicable levels of preservation and packaging, and packing (5.1 and 5.2).

(*f*) Whether intermediate packaging is required (5.1.1.3).

(*g*) Quantity per shipping container (5.2.1).

(*h*) Marking, if different (5.3).

6.3 Transportation description. The applicable transportation description is:

Punches, metal working, not otherwise indexed by name.
Carload minimum weight 24,000 pounds, subject to Rule 34, Uniform Freight Classification.
Motor volume minimum weight 24,000 pounds.

6.4 Items procured under this specification for military use are to be limited to the variety shown on the applicable military standards. Personnel of the military departments are requested to refer to these documents for guidance.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:

Army—O
Navy—Sh
Air Force—MOA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.