GGG-S-793a
September 29, 1964

SUPERSEDING
Int. Fed. Spec. GGG-S-00793 (GSA-FSS)
January 17, 1964

FEDERAL SPECIFICATION

STRIPPER, WIRE, BENCH

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 This specification covers one type of lever operated wire stripper which is bench mounted and is generally used for production stripping of various single or parallel conductors and cables using rubber, asbestos, plastic, glass, cambric insulation, etc.

1.1.1 *Federal specification coverage.* Federal specifications do not include all types and classes of the commodity indicated by the title of the specification, but are intended to include only those most generally used by the Federal Government.

2. APPLICABLE SPECIFICATIONS, STANDARDS AND OTHER PUBLICATIONS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-P-116—Preservation, Methods of.
MIL-H-15424—Hand Tools, Packaging of.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification. Unless otherwise indicated, the issue in effect on the date of invitation for bids shall apply.

National Bureau of Standards Handbook:
H28—Screw-Thread Standards for Federal Services and Supplements thereto.

FSC 5110

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:42Z
Check the source to verify that this is the current version before use.

(Applications for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

3. REQUIREMENTS

3.1 **Illustration.** The illustration shown herein is for convenience of identification and is not intended to preclude the purchase of wire strippers which are otherwise in accordance with this specification.

3.2 **Material.** Material used in the construction of strippers shall be sound, of uniform quality and condition to provide ample strength, and shall conform in composition, heat treatment, and suitability to preclude misalignment of cutting blades, handles, or parts when subjected to hard usage. Parts subject to wear shall be suitably hardened.

3.3 **Interchangeability of parts.** All parts having the same manufacturer's part number shall be constructed to definite standards, tolerances, and clearances in order that such parts may be completely interchangeable, replaced, or adjusted without requiring modification.

3.4 **Finish.** Unless otherwise specified (see 6.1), the strippers shall be finished in accordance with the manufacturer's standard practice.

3.5 **Marking.** All strippers shall be marked in a plain and permanent manner with the manufacturer's name or trademark of such known character that the source of manufacture may be readily determined.

3.6 **Design and construction.** The strippers shall be of the latest design, afford a comfortable grip, and shall remove insulation in a neat and uniform manner without injury to the conductor. Rivets and pins when used shall be so secured that looseness adversely affecting operation will not develop under hard usage. Means shall be provided to prevent shifting of the blades, thereby maintaining center alignment of cutting edges of the blades. The blades shall be securely held to the tool assembly by screw or other methods to permit easy removal and replacement. All springs shall be manufactured of high-quality steel properly hardened and tempered in accordance with standard practice. Means shall be provided for removal and replacement of all springs. Screws shall be installed with an adequate means for preventing loss of proper tightness and adjustment. Strippers shall be of sturdy construction and shall consist essentially of a base and sliding plate, two eccentric jaws, two stripping blades and blade posts, an adjustable wire stop, and a lever-type handle.

3.6.1 *Base and sliding plate.* At least two holes shall be provided in the base so that the stripper may be fastened to a bench. The base shall provide adequate support for the working parts and be suitable for mounting the sliding plate, holding jaws, blades and blade posts, wire stop and handle assembly.

3.6.2 *Eccentric jaws.* Two eccentric jaws shall be mounted on the sliding plate and be positioned and designed to hold the wire securely while the blades strip the insulation off the wire.

3.6.3 *Stripping blades and blade posts.* A slot or other means shall be provided so that the stripping blades can be mounted and secured in the blade posts. The blade posts shall also provide a means for easy blade removal and blade adjustment. Stripping blades shall be of a high grade steel and shall show a Rockwell "C" hardness reading of from 59 to 63 when tested as specified in 4.3.1.

3.6.4 *Adjustable wire stop.* A wire stop shall be provided which can be adjusted so that wires can be stripped to a given length, in a uniform manner.

3.6.5 *Lever type handle.* A level type handle shall be provided and designed to actuate the two eccentric jaws and the two blades and blade posts so that the wire can be stripped. Handles shall be firmly fixed so that even after hard usage they will not loosen or become disengaged.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

3.6.6 *Capacity.* Wire strippers shall be capable of stripping wires having A.W.G. numbers from 18 through 0000. Supplier shall furnish blades in matched pairs in accordance with table I (see 6.1).

TABLE I.—*Blades (pairs) for wire stripper, bench*

Hole diameter in blades	Approximate A.W.G. wire No.[1]
Straight	
.0390	18
.0595	16
.0785	14
.0995	12
.1200	10
.1405	8
.1610	7
.1820	6
.2040	5
.2280	4
.2500	3
.2720	
.2900	2
.3125	1
.3320	
.3480	0
.3680	
.3860	00
.4040	
.4210	
.4375	000
.453	
.468	0000

[1] Note: All stranded wire is larger than solid wire of the same gauge and may or may not take the same blade number as the size in standard wire. The next size larger blades may be required depending on number and size of wire strands.

3.6.7 Wire strippers shall be similar to figure 1.

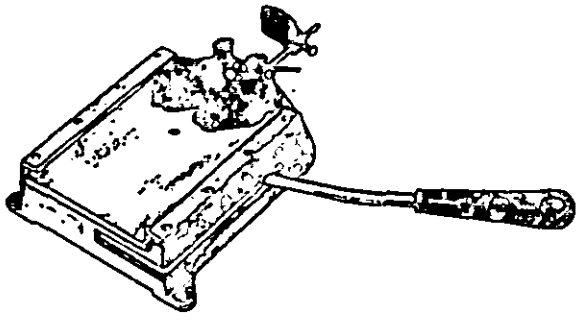


Figure 1. Wire Stripper, Bench

3.7 Repair parts. The successful bidders supplying strippers shall make available and furnish repair parts when requested. All parts having the same manufacturer's part number shall be constructed to definite standards, tolerances, and clearances, in order that such parts may be completely interchangeable, replaced, or adjusted without requiring modification.

3.8 Workmanship. The workmanship shall be in accordance with good commercial standards. Strippers shall be free from sharp corners and edges (except cutting blades) and all imperfections which may adversely affect their durability and serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Sampling for quality conformance inspection. Sampling for quality conformance inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.2.1 *Inspection of materials and components.* In accordance with 4.1 above, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

4.2.2 *Inspection of the end item.* Inspection of the strippers shall be performed as specified in the following paragraphs. All strippers of the same type, submitted for acceptance at one time, shall be considered a lot for purposes of inspection. The sample unit shall be one completely fabricated and assembled stripper.

4.2.2.1 *Visual examination.* Each sample unit shall be visually examined to determine that it is of the latest design and for defects set forth in table II. The inspection level shall be level II with an acceptable quality level of 4.0 defects per hundred units.

TABLE II.—*Classification of defects*

Examination	
Finish	Surfaces not free from sharp corners and edges (other than cutting edge).
	Indication of rust.
	Finish not uniform.
	Machine marks.
	Finish not as required.
	Scale, burrs and pits.
Material	Not as specified.
Construction and workmanship	Component missing or improperly assembled.
	Cutting blades damaged, nicked, not sharp, not smoothly ground.
	Blades not adequately supported to assure alignment.
	Blades not readily replaceable.
	Excessive looseness or tightness of joints or rivets.
	Springs broken, cracked or means for removing and replacement not provided.
	Handle not secured so as to prevent looseness after hard usage.
Marking	Incomplete, illegible, missing, incorrect, not affixed in the prescribed manner.

4.2.2.2 *Dimensional examination and test.* Examination of the end item shall be made to determine compliance with the dimensions specified in the applicable paragraphs and tables. Any departure therefrom shall constitute a defect. The inspection level shall be S-3 with an acceptable quality level of 6.5 defects per hundred units.

4.2.3 *Inspection of preparation for delivery.* Inspection to determine compliance with preparation for delivery requirements shall be accomplished in accordance with MIL-P-116, method I.

4.3 Test procedures.

4.3.1 *Hardness test.* Each blade of the sample strippers selected in accordance with 4.2.2.2 shall be tested to determine compliance with the requirements specified in 3.6.3. Hardness readings shall be made on each blade as close to the cutting edge as practicable.

4.3.2 *Practical use and wire stripping test.* Each sample stripper selected in accordance with 4.2.2.2 shall be subjected to a practical use and wire stripping test. This test shall be conducted using at least the No. 18 and the No. 0000 A.W.G. blade sizes to establish stripper capacity, and the holding ability of the eccentric jaws. At least ten No. 18 and ten No. 0000 A.W.G. wires shall be stripped at each 1/2 inch increment throughout the entire range of the wire stop to determine the effectiveness of the stripper. The test shall demonstrate that the stripper provides a comfortable handgrip, and removes insulation in a neat and uniform manner without injury to the conductor. Failure of the sample stripper to meet any of the above test requirements shall be cause for rejection.

5. PREPARATION FOR DELIVERY

(Civil agencies should refer to Fed. Std. No. 102 for definitions of the various levels of packaging and packing protection for supplies and equipment.)

5.1 Preservation and packaging. Preservation and packaging shall be level A or C, as specified (see 6.1).

5.1.1 *Level A.* Preservation and packaging shall be in accordance with MIL-P-116, method I.

5.1.2 *Level C.* Preservation and packaging which will afford adequate protection

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:42Z
Check the source to verify that this is the current version before use.

against corrosion, deterioration, and damage during shipment from supply source to the first receiving activity for immediate use (vendor to user).

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.1).

5.2.1 *Level A.* Four strippers, packaged as specified (see 5.1), shall be packed in accordance with level A requiremnts of MIL-H-15424.

5.2.2 *Level B.* Four strippers, packaged as specified (see 5.1), shall be packed in accordance with level B requirements of MIL-H-15424.

5.2.3 *Level C.* Packing which will afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use.

5.3 Marking.

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, interior and exterior shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military agencies.* In addition to any special marking required by the contract or order herein, interior and exterior shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Finish, if other than the standard finish of the manufacturer is required (3.4).
(*c*) Applicable levels of preservation, packaging, and packing (see 5.1, 5.2).
(*d*) Any special marking required (see 5.3).

6.1.1 When repair parts for strippers are required, the following should be specified:

(*a*) The manufacturer's name or trademark of stripper for which required.
(*b*) The proper name of the part.
(*c*) Quantity of each item to be procured.
(*d*) Any other data applicable to the stripper which will assist in securing the proper repair parts.

6.2 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Tools, not otherwise indexed by name. Carload minimum weight 30,000 pounds.

Motor:

Tools, hand, not otherwise indexed. Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

MILITARY INTEREST:

Custodians:

Army—GL

Navy—SH

Air Force—69

Review Activities

GL, MD

SH

69

User Activities

EL, MO

YD, WP, MC

Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing Of DOD Standardization Documents.

Copies of this specification may be purchased for 5 cents each.

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:42Z
Check the source to verify that this is the current version before use.