GGG-T-00870b(GSA-FSS)
September 15, 1966
INTERIM REVISION OF
Fed. Spec. GGG-T-870a
July 11, 1957

INTERIM FEDERAL SPECIFICATION

TWEEZERS, CRAFTSMAN'S

This Interim Federal Specification was developed by Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C., 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification GGG-T-870a, dated July 11, 1957, and Interim Amendment-1, dated June 5, 1961.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers tweezers used for repair work on instruments, for soldering and other general uses where small objects are to be gripped, cut, or held in position.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types, classes, designs and styles. Tweezers shall be of the following types, classes, designs, and styles as specified (see 6.1):

Type I. - General purpose.
  Class 1. - Steel.
    Design A. - Smooth jaws.
      Style 1. - Fine tip.
      Style 2. - Heavy tip.
      Style 3. - Slim point.
    Design B. - Serrated jaws.
      Style 1. - Fine tip.
      Style 2. - Heavy tip.
  Class 2. - Nonmagnetic.
    Design A. - Smooth jaws
      Style 1. - Fine tip.
      Style 2. - Heavy tip.
      Style 3. - Slim point.
    Design B. - Serrated jaws.
      Style 1. - Fine tip.
      Style 2. - Heavy tip.
Type II. - Assembly.
  Class 1. - Steel.
    Design A. - Smooth jaws.
      Style 1. - Fine tip.
      Style 2. - Heavy tip.
    Design B. - Serrated jaws.
      Style 3. - Blunt point.
  Class 2. - Nonmagnetic.
    Design B. - Serrated jaws.
      Style 1. - Fine tip.
      Style 2. - Heavy tip.
      Style 3. - Blunt point.
Type III. - Clock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

Type IV. - Curved point.
Class 1. - Steel.
Design A. - Smooth jaws.
Style 1. - Fine tip.
Style 2. - Heavy tip.
Design B. - Serrated jaws.
Style 1. - Fine tip.
Style 2. - Heavy tip.
Class 2. - Nonmagnetic.
Design B. - Serrated jaws.
Style 1. - Fine tip.
Style 2. - Heavy tip.
Type V. - Locking.
Class 2. - Cross-locking (self-closing).
Type VI. - Cutting.
Class 1. - Angled cutting edge.
Class 2. - Straight cutting edge.
Type VII. - Hairspring.
Type VIII. - Pivot straightening.
Type IX. - Soldering.
Class 1. - Straight point.
Class 2. - Bent point.
Type X. - Hollow jaw.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards, of the issues in effect on date of invitation for bids, or request for proposal, form a part of this specification:

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 151 - Metals; Test Method.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:
MIL-H-15424 - Hand Tools, Packaging of.
MIL-I-17214 - Indicator, Permeability; Low-Mu (Go-No-Go).
Military Standards:
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Illustrations. The illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of tweezers otherwise conforming to this specification.

3.2 Design. Tweezers shall consist of right and left legs joined together at the end opposite the points to form a solid one-piece tool. Tweezers shall be properly proportioned to provide a strong durable tool.

3.3 Material. Tweezers shall be made of steel of such quality to provide compliance with this specification. Type I, class 2; type II, class 2; and type IV, class 2 shall be nonmagnetic. Tweezers of the nonmagnetic type shall not exceed 1.2 magnetic permeability (see 4.4.5). When specified (see 6.1), type I tweezers shall be made of corrosion-resisting steel.

3.4 Points. When closed, the points of tweezers shall coincide (see 4.4.2 and 4.4.3).

3.5 Jaws. Jaws shall be design A, smooth inside surface; or design B, serrated inside surface, as specified (see 6.1). Serrations when provided, shall be sharp and well defined. Unless otherwise specified herein, jaws shall be serrated for not less than 1/4 inch back from the tip of the tweezer.

3.6 Joint. The two legs of the tweezers shall be joined together by forge welding, spot welding, brazing, or riveting. The minimum length of the joint shall be equal to the width of the leg plus 1/8 inch.

3.7 Hardness. The hardness of tweezers shall conform to the following requirements when tested as specified in 4.4.1. The points of tweezers except nonmagnetic, soldering, and cutting shall show a hardness of not less than 40 nor more than 52 on the Rockwell C scale, for a distance of not less than 1/2 inch from the tip. The legs of the nonmagnetic tweezers shall show a hardness of not less than 80 on the Rockwell B scale. The cutting edges of type VI tweezers shall be checked for hardness by file method (see 4.4.1.1). The points of type IX, soldering tweezers, need not be hardened.

3.8 Finish and coating. All exposed surfaces shall be polished. All edges, other than the points shall be rounded. Tweezers shall be either nickel or chromium plated. Platings may be omitted if the material is corrosion-resistant. Type IX, soldering tweezers, may be unplated provided the surfaces are smoothly finished.

3.9 Identification marking. Tweezers of domestic manufacture shall be marked in a plain and permanent manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined. If tweezers of foreign manufacture are procured they shall be marked in a plain and permanent manner with the name of the country of their origin and the name or known trademark of the contractor.

3.10 Performance. Tweezers shall be of such quality as to satisfactorily comply with the deflection and distortion tests specified in 4.4.2, 4.4.3 and 4.4.4.

3.11 Type I, general purpose. Tweezers shall conform to tables I, II and III as applicable, and shall be similar to figures 1, 2, and 3.

Table I. - Type I, classes 1 and 2, designs A and B, styles 1 and 2, general purpose steel and nonmagnetic tweezers, fine and heavy tips.

Overall length ± 1/4 A	Overall width (Min.) B	Length of tip ± 1/8 C	Jaw opening ± 1/16 D	E				F			
				Style 1		Style 2		Style 1		Style 2	
				Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
Inches	Inch	Inches	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch
4-1/2	3/8	1-3/4	5/16	0.005	0.015	0.016	0.025	0.005	0.015	0.016	0.025
5	3/8	2	5/16	.005	.017	.018	.030	.005	.017	.018	.030

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

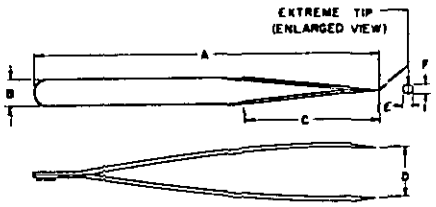


Figure 1. - Type I, classes 1 and 2, general purpose, steel and nonmagnetic tweezers, fine and heavy points.

Table II. - Type I, classes 1 and 2, design A, style 3, slim point.

Overall length ± 1/4 A	Overall width (Min.) B	Length of tip ± 1/8 C	Jaw opening ± 3/16 - 1/16 D	E		F	
				Min.	Max.	Min.	Max.
Inches	Inch	Inches	Inch	Inch	Inch	Inch	Inch
4-1/4	5/16	1	5/16	0.020	0.030	0.030	0.050
6	3/8	2-1/2	1/4	.070	.080	.040	.050

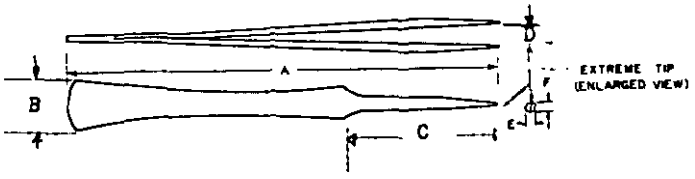


Figure 2. - Type I, classes 1 and 2, design A, style 3, slim point.

3.11.1 Class 1, steel. The style of tweezer, whether fine, heavy, blunt, or slim point shall be determined by the tip dimensions "E" and "F" (see tables I, II and III, and figures 1, 2, and 3). Jaws shall be design A or B, as specified (see 3.5 and 6.1).

3.11.2 Class 2, nonmagnetic. Tweezers shall conform to 3.11.1 except they shall be of nonmagnetic metal.

3.12 Type II, assembly.

3.12.1 Class 1, steel, styles 1 and 2. The style of tweezer, whether fine or heavy, shall be determined by the tip dimensions "E" and "F" (see table III and figure 3). Jaws shall be design A or B, as specified (see 3.5 and 6.1).

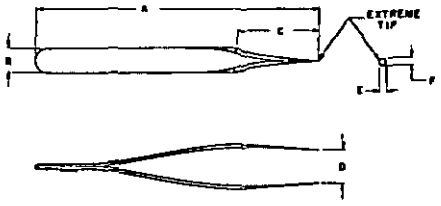


Figure 3. - Type II, class 1, styles 1 and 2, assembly tweezers, fine and heavy tips.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

Table III. - Type II, class 1, styles 1 and 2, assembly tweezers, fine and heavy tips.

Overall length ± 1/8 A	Overall width (Min.) B	Length of tip ± 1/8 C	Jaw opening ± 1/16 D	E				F			
				Style 1		Style 2		Style 1		Style 2	
				Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
Inches	Inch	Inches	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch	Inch
4-3/8	3/8	1-3/16	1/4	0.005	0.020	0.021	0.035	0.005	0.015	0.016	0.025

3.12.2 Class 2, nonmagnetic, styles 1 and 2. Tweezers shall conform to 3.12.1 except they shall be of a nonmagnetic metal.

3.12.3 Classes 1 and 2, style 3, blunt point. Tweezers shall conform to table IV, and be similar to figure 4. The inside surfaces of the jaws shall be serrated.

Table IV. - Type II, classes 1 and 2, style 3, assembly tweezers, blunt point.

Overall length ± 1/4 A	Overall width (Min.) B	Point length ± 1/8 C	Tip width ± 1/16 D	Jaw opening ± 1/16 E	Distance of jaw serrations ± 1/8 F	Thickness of leg ± .005 G
Inches	Inch	Inches	Inch	Inch	Inch	Inch
5	1/2	1-1/2	1/8	1/4	1/4	0.035
6	1/2	2-1/4	1/8	5/8	3/4	.050

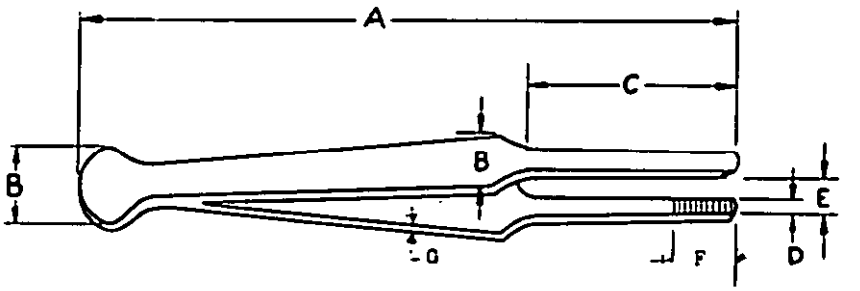


Figure 4. - Type II, classes 1 and 2, style 3, assembly tweezers, blunt point.

3.13 Type III, clock. Tweezers shall conform to table V and be similar to figure 5. The inside surfaces of the jaws shall be smooth.

Table V. - Type III, clock tweezer.

Overall length ± 1/4 A	Point length ± 1/4 C	Jaw opening ± 1/16 D
Inches	Inches	Inch
6-1/2	3-1/4	1/2

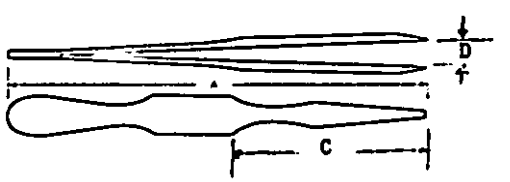


Figure 5. - Type III, clock tweezer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.14 Type IV, curved point.

3.14.1 Class 1, steel. The style of tweezer, whether fine or heavy tip, shall be determined by the tip dimensions "E" and "F" (see table VI and figure 6). The inside surfaces of the jaws shall be design A or B as specified (see 3.5 and 6.1).

Table VI. - Type IV, classes 1 and 2, curved point tweezers, steel and nonmagnetic.

Nominal size	Dimensions													
	A ± 1/4	B Min.	C ± 1/8	D ±3/16 -1/16	E				F				G ± 1/16
					Style 1		Style 2		Style 1		Style 2		
					Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
Inches	*Inches*	*Inch*	*Inches*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*	*Inch*
4½	4⅜	5/16	1⅝	¼	0.010	0.025	0.025	0.035	0.005	0.020	0.085	0.095	⅛
6½	6⅜	5/16	2⅝	⅜	-------	-------	.040	.060	-------	-------	.020	.040	⅜

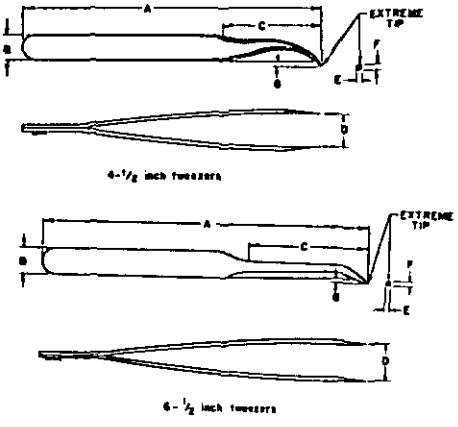


Figure 6. - Type IV, classes 1 and 2, curved point tweezers, steel and nonmagnetic.

3.14.2 Class 2, nonmagnetic. Tweezers shall be similar to class 1 except they shall be of a nonmagnetic metal.

3.15 Type V, locking.

3.15.1 Class 2, cross-locking (self-closing). Class 2 tweezers shall be of a cross-lock design that will automatically close the tips when not in use. The tension of the cross lock shall hold the tip in a tightly closed position. Tweezers shall comply with the test requirement of 4.4.3. The inside surfaces of the jaws shall be serrated (see 3.5). Tweezers shall conform to table VII, and shall be similar to figure 7.

Table VII. - Type V, class 2, cross-locking tweezers.

Overall length ± 1/4 A	Overall width Min. B	Length of jaws ± 1/8 C	Jaw opening Min.	Tip width ± 1/32 E
Inches	Inch	Inches	Inches	Inch
6-1/2	3/8	3-5/8	3/4	5/32

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

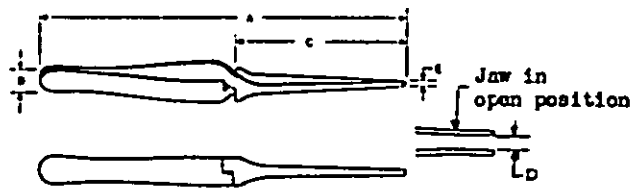


Figure 7. - Type V, class 2, cross-locking tweezers.

3.16 Type VI, cutting. Tweezers shall be provided with cutting edges suitable for cutting hairspring regulator pins and similar items.

3.16.1 Class 1, angled cutting edge. Class 1 tweezers shall conform to table VIII and be similar to figure 8.

Table VIII. - Type VI, class 1, cutting tweezer, angled cutting edge.

Nominal size	A ± 1/4	B Min.	C ± 1/8	H ± 1	I ± 3	J ± 1/32
Inches	Inches	Inch	Inch	Dgs.	Dgs.	Inch
4-3/8	4-3/8	3/8	7/8	10	38	1/8

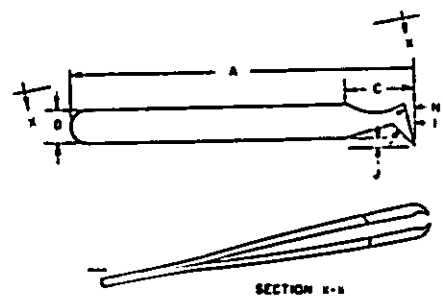


Figure 8. - Type VI, class 1, cutting tweezer, angled cutting edge.

3.16.2 Class 2, straight cutting edge. Class 2 tweezers shall conform to table IX and be similar to figure 9.

Table IX. - Type VI, class 2, cutting tweezer, straight edge.

Nominal size	Overall length A ± 1/4	Length of cutting edge B ± 1/8 - 1/16	Point length C ± 3/16 - 1/16	Jaw opening D (min.)
Inches	Inches	Inch	Inch	Inch
4-1/2	4-1/2	1/2	7/16	3/32




Figure 9. - Type VI, class 2, cutting tweezer, straight edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.17 Type VII, hairspring. Tweezers shall have one jaw concave and the other convex, and be suitable for shaping hairsprings of watches. Tweeser shall conform to table X and be similar to figure 10.

Table X. - Type VII, hairspring tweezer.

Nominal size	A ± 1/4	B Min.	C ± 1/8
Inches	Inches	Inch	Inch
4-1/4	4-1/4	3/8	7/8

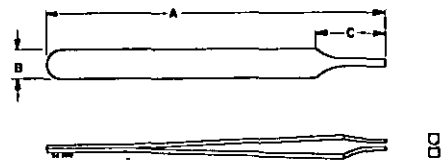


Figure 10. - Type VII, hairspring tweezer.

3.18 Type VIII, pivot straightening. Tweezers shall conform to table XI and be similar to figure 11. The inside surfaces of the jaws shall be flat and smooth.

Table XI. - Type VIII, pivot straightening tweezer.

Nominal size	A ± 1/4	B Min.	C Min.	D ± 3/16 ± 1/16	E ± 1/16
Inches	Inches	Inch	Inches	Inch	Inch
4-3/8	4-5/16	3/8	2-5/8	3/16	1/8

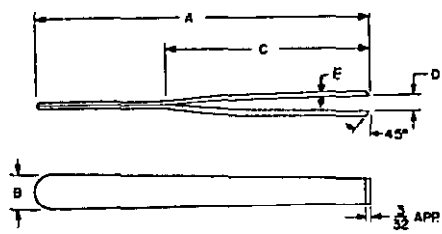


Figure 11. - Type VIII, pivot straightening tweezer.

3.19 Type IX, soldering.

3.19.1 Class 1, straight point. Tweezers shall conform to table XII, and be similar to figure 12. The inside surfaces of the jaws shall be serrated.

Table XII. - Type IX, class 1, soldering tweezers, straight point.

Overall length ± 1/4 A	Overall width (min.) B	Point length (min.) C	Tip width ± 1/32 C	Distance of jaw serrations ± 1/8 E	Jaw opening ± 1/8 F
Inches	Inches	Inches	Inch	Inch	Inch
5	7/16	1-1/2	3/16	5/16	1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

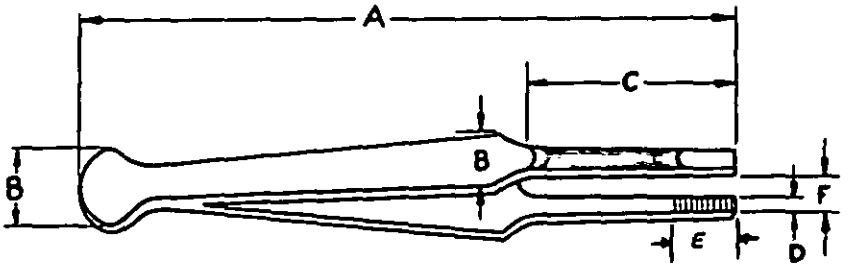


Figure 12. - Type IX, class 1, soldering tweezers, straight point.

3.19.2 Class 2, bent point. Tweezers shall conform to figure 13.

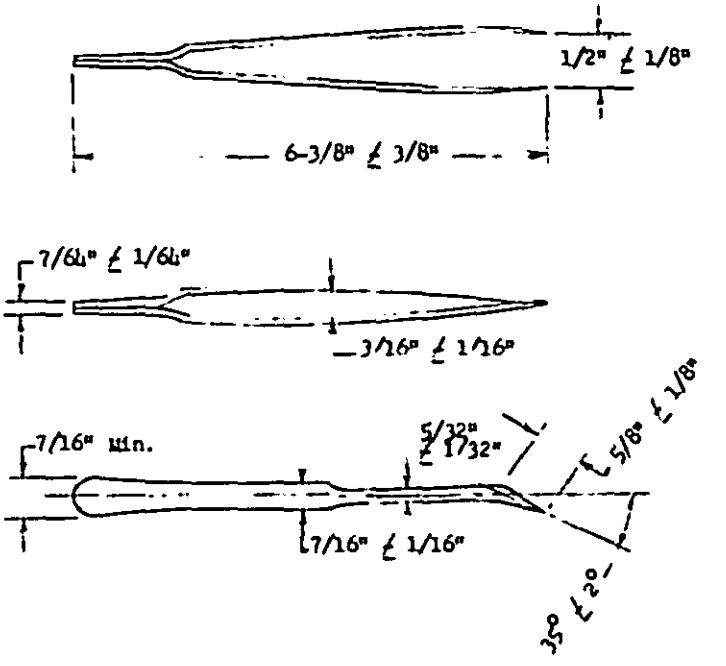


Figure 13. - Type IX, class 2, soldering tweezers, bent point.

3.20 Type X, hollow jaw. Tweezer shall conform to table XIII and be similar to figure 14.

Table XIII. - Type X, hollow jaw.

Overall length ± 1/4 A	Overall length hollow jaw ± 3/16 B	Overall length handle end ± 1/8 C	Jaw opening ± 3/16 D 1/16
Inches	Inches	Inches	Inch
4-1/2	1-7/8	2-1/2	1/2

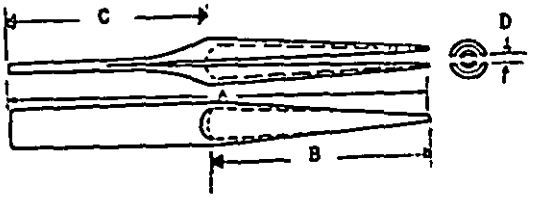


Figure 14. - Type X, hollow jaw.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

3.21 Workmanship. Workmanship shall be of the highest grade throughout and equal in every respect to good commercial practice. Tweezers shall be free from any imperfections that may affect their serviceability or durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table XIV.

Table XIV. - Sampling data.

Category	Sample Unit	Inspection Level	Acceptable Quality Level	AQL Expressed In Terms Of	Reference
Visual examination	One each	II	2.5	Defects per 100 units	4.3.1
Dimensional examination	One each	S-4	2.5	Defects per 100 units	4.3.2
Testing	One each	S-4	4.0	Defects per 100 units	4.4
Preparation for delivery	One container	S-2	4.0	Defects per 100 units	4.5

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, material, finish, coating, construction, workmanship, and marking.

4.3.2 Dimensional examination. Each sample unit shall be examined for any nonconformance with dimensional requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1 through 4.4.5.

4.4.1 Hardness. Each sample tweezer shall be tested in accordance with Fed. Std. No. 151 to determine compliance with the applicable hardness requirements of 3.7. The legs shall be separated so that the inside surface can be placed on the anvil of the Rockwell testing machine. Tweezers furnished with a coated finish shall be prepared for the hardness test by grinding only sufficiently to insure accurate readings.

4.4.1.1 Hardness of type VI tweezer. The hardness of type VI tweezer shall be determined by the use of four test files having a Rockwell C hardness of 57/58, 59/60, 60/61, 62/64 or such test files as are available. The tweezer to be tested shall be rigidly mounted in a suitable clamping device and the test file drawn across the land surface of the tweezer jaw. The extent of cutting or abrading of the surface of the tweezer shall be compared with similar markings on a standard tweezer of such size that the Rockwell C hardness is readily obtainable for comparison. The file shall be in good condition and shall be applied to the surface with short, firm strokes attempting to "feel" how the file bites the surface. Hardness of the tweezers should be such that they cannot be cut or abraded with the C 57 file, but can be cut or abraded with the C 64 file.

4.4.2 Deflection test. The tweezers shall be deflected as shown on figure 15 from the full open position to the point of contact when a weight as specified in table XV for each type or class and size is applied. The extreme tip of all tweezers shall meet upon deflection, and shall remain closed upon further deflection until not less than 1/8 of an inch extending back from the tip has joined. Dimension "A" on figure 15 shall be as specified in table XV for each type or class and size.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

Table IV. - Values of deflection test.

Type	Class	Size	Weight applied (permissible range)	Location of point of load application A
		Inches	Pounds	Inches
I	1 and 2	4-1/2	0.32 to 1.2	2-5/8
		5	.32 to 1.2	3
II	1 and 2	4-3/8	.25 to 1.0	2-5/8
		5	.32 to 1.2	3-1/4
		6	.50 to 2.0	3-1/2
III	- - - -	6-1/2	.50 to 2.0	3-1/2
IV	1 and 2	4-3/8	.32 to 1.0	2-5/8
		6-3/8	.62 to 2.5	3-5/8
VI	1 and 2	4-3/8	.32 to 1.2	2-5/8
		4-1/2	.32 to 1.2	2-5/8
VII	- - - -	4-1/4	.32 to 1.2	2-5/8
VIII	- - - -	4-5/16	.32 to 1.2	2-5/8
IX	1 and 2	5	.32 to 1.2	3
		6-1/2	.62 to 2.0	3-1/2
X	- - - -	4-3/4	.32 to 1.2	2-5/8

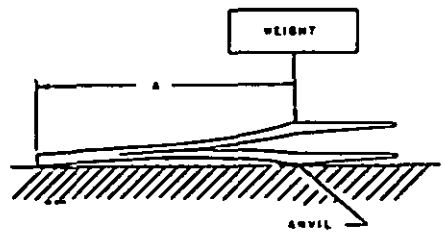


Figure 15. - Load deflection set-up for tweezers.

4.4.3 Deflection test for type V, class 2 tweezer. At the point on the handle where the cross-lock begins, the minimum necessary weight shall be applied to force the jaws into the wide-open position. When the weight is removed after a 5-minute application, the jaws shall return to the normal closed position (see 3.15.1).

4.4.4 Distortion test. With a weight of two pounds applied as shown on figure 16, the distortion of all types and classes of tweezers shall not exceed 0.020 inch for tweezers less than 6 inches in nominal length and 0.025 inch for tweezers 6 inches or greater in nominal length, when one leg of the tweezer is held rigidly by 1/2 inch wide positioners opposite the point of application of the load on the other leg. Dimension "A" shall be as specified for the deflection test. When measuring for permissible distortion, the legs of the tweezer shall be compressed so that the tips just make contact.

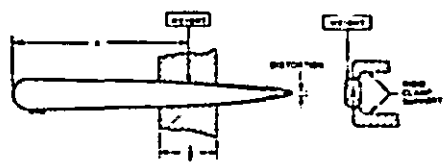


Figure 16. - Load distortion set-up for tweezers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

4.4.5 Magnetic permeability test. Nonmagnetic tweezers shall be tested to determine conformance with 3.3. A permeability indicator in accordance with MIL-I-17214 shall be used for this determination.

4.5 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table XVI. For examination of interior packaging, the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 defects per hundred units.

Table XVI. - Classification of preparation for delivery defects.

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Distortion of container.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.1).

5.1.1 Level A. The tweezers shall be preserved and packaged in accordance with MIL-H-15424 as specified for level A.

5.1.2 Level C. The tweezers shall be packaged in accordance with the supplier's commercial practice.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.1).

5.2.1 Level A. The tweezers shall be packed in accordance with MIL-H-15424 as specified for level A.

5.2.2 Level B. The tweezers shall be packed in accordance with MIL-H-15424 as specified for level B.

5.2.3 Level C. The tweezers shall be packed to insure carrier acceptance and safe delivery at destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military activities. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following data in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, design, and style required (see 1.2).
(c) Specify if tweezer to be of corrosion-resisting steel (see 3.3).
(d) Size required (see applicable tables).
(e) Specify inside jaw design required (see 1.2.1 and 3.5).
(f) Selection of applicable level of preservation, packaging and packing required (see 5.1 and 5.2).

6.2 For civil agency procurements. When level B packaging is required for civil agency procurements, the requirements in 5.1.1, level A packaging shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.