INTERIM AMENDMENT

FEDERAL SPECIFICATION
TWEEZERS, CRAFTSMANS

This Interim Amendment was developed by the QM R&E Center (GL), Natick, Massachusetts, based on currently available technical information. This Interim Amendment has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy and the Air Force. It is recommended that Federal Agencies use it in procurement. The General Services Administration has authorized the use of this Interim Amendment as a valid exception to Federal Specification GGG-T-870a, dated July 11, 1957, and Interim Amendment 1, dated June 6, 1961.

Page 1, paragraph 1.2.1—Add the following:
Type IX—Soldering.

Page 2, paragraph 2.1, under Federal Specification—Delete "PPP-P-31—Preservation, Packaging, Packing, and Marking of Material; and Shipping Instructions (Domestic Shipment and Storage)."

Page 2, paragraph 2.1, under Federal Standard—Add "Fed. Std. No. 123—Marking for Domestic Shipment."

Page 2, paragraph 2.1, under Military Specification—Delete "MIL-P-15424—Packaging of Hand tools for Domestic and Overseas Shipment and Storage" and substitute "MIL-H-15424—Hand Tools, Packaging of."

Page 2, paragraph 3.3, end of paragraph—Add "When specified (see 6.1), type I tweezers shall be made of corrosion-resisting steel. The type I, class 2 tweezers shall meet the nonmagnetic requirement specified above."

Page 2, paragraph 3.7—In the fourth line, between the words "nonmagnetic" and "and", insert the word "soldering". At the end of the paragraph, add the following: "The points of type IX soldering tweezers need not be hardened."

Page 3, paragraph 3.8, third sentence—Add the following: "and type IX soldering tweezers may be unplated, provided the surfaces are smoothly finished."

Page 6, table X, under letter "C" in the fourth column—Delete "plus or minus ⅛" and substitute "minimum."

Page 6, paragraph 3.19—Renumber paragraph "3.19" to "3.20" and insert a new paragraph 3.19, table XA, and figure 9A, as follows:

"**3.19 Type IX soldering.** Tweezers shall conform to table XA and shall be similar to figure 9A. The inside surfaces of the jaws shall be serrated for a distance of at least 5/16-inch from the tip back towards the joint.

TABLE XA. *Type IX soldering tweezers*

Nominal size	Overall length A (±1/4)	Overall width B (Min)	Point length (C) Min	Tip width (D) ±1/32	Jaw opening (F) ±1/4
Inches 5	*Inches* 5	*Inches* 3/16	*Inches* 1 1/2	*Inches* 5/16	*Inches* 1/4

PSC 5120

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:43Z
Check the source to verify that this is the current version before use.

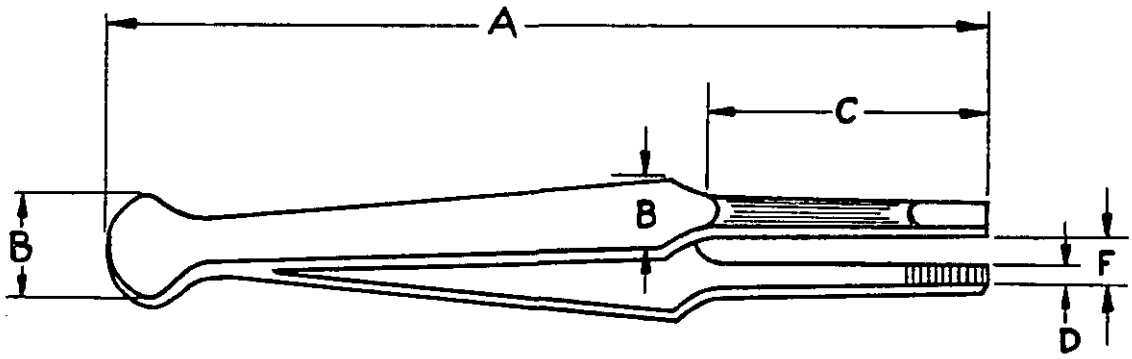


FIGURE 9A. *Type IX soldering tweezer.*

Paragraphs 4.1 through 4.3.2 and 4.5—Delete and substitute:

"**4.1 Inspection responsibility.** Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in Standard MIL–STD–105, except where otherwise indicated herein.

4.2.1 *Inspection of components and materials.* In accordance with 4.1 above, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein or, if none, in accordance with this specification.

4.2.2 *End product inspection.* Inspection of the tweezers shall be performed as specified in the following paragraphs. A lot shall consist of tweezers of the same type, class, design, style and size. The sample unit shall be one completely fabricated tweezer.

4.2.2.1 *Visual examination.* Each sample unit shall be visually examined for the defects set forth below. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 defects expressed in defects per hundred units.

Examine	*Defects*
Finish	Missing.
	Not as specified.
	Not smooth, rust, nodules, pits, peeling, blistering, chipping, scratches.
	Area of no coating (as applicable).
Design	Any characteristic not in accordance with the specified requirements.
Construction and workmanship.	Part missing.
General	Sharp burrs or edges that may be injurious to personnel.
	Fractured, split, sprung, cracked, malformed, dented, bowed, broken or otherwise impaired.
	Functional component that requires abnormal force to operate.
	Loose or not in proper alignment.
	Not connected or joined as specified.
Welding and brazing (where applicable).	Missing.
	Completely broken or not fused.
	Burnt holes, slag inclusion, undercut, cracked or partially broken.
	Excess weld or braze.
Riveting (where applicable).	Missing.
	Loose, cracked, broken or otherwise damaged.
Marking identification.	Missing, incomplete, not legible, not permanent or not as specified.

4.2.2.2 *Dimensional examination.* Examination shall be made of the end product to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.

determine compliance with dimensional requirements. Any dimension that is not within specified tolerances shall be classified a defect. The inspection level shall be LS with an AQL of 2.5 defects, expressed in defects per hundred units.

4.2.2.3 *Testing of the end product.*

4.2.2.3.1 *Deflection, distortion and magnetic permeability.* Each sample unit shall be tested as specified in 4.4.2, 4.4.3 and 4.4.4 to determine compliance with the requirements of 3.10 and 3.3 respectively. The inspection level shall be LS with an AQL of 4.0 defects, expressed in defects per hundred units.

4.2.2.3.2 *Rockwell hardness.* Each sample unit shall be tested for Rockwell hardness as specified in 4.4.1 to determine compliance with the requirements of 3.7. The inspection level shall be L5 with an AQL of 1.5 defects per hundred units.

4.2.3. *Examination of preparation for delivery.* Inspection to determine compliance with preparation for delivery shall be made in accordance with Specification MIL-H-15424."

Page 8, Table XI add the following as the last line, "IX:—: 5 : .50 to 2.0 : 3½"

Pages 8 and 9, paragraphs 5.1.1, 5.2.1 and 5.2.2—Delete "MIL-P-15424" and substitute "MIL-H-15424."

Page 9, paragraph 5.3.2—Delete "Federal Specification PPP-P-31" and substitute "Fed. Std. No. 123."

Page 9, paragraph 6.1—Add the following option: "If type I tweezers are required to be made of corrosion-resisting steel (see 3.3)."

Custodians:

Army—GL
Navy—Ships
Air Force—MOA

Preparing activity:

Army—GL
Project No. 5120-0376

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:43Z
Check the source to verify that this is the current version before use.