MILITARY STANDARD


TRUCKLOADING
NITROGUANIDINE HIGH BULK
DOMESTIC UNIT LOAD


MIL-STD-1320-114
(Navy)

24 NOVEMBER 197[illegible]

UNIT LOAD DATA

LENGTH	48.0
WIDTH	[illegible]
HEIGHT	[illegible]
WEIGHT	12[illegible]
CUBE	[illegible]
DOT HAZARD CLASSIFICATION	EXPLOSIVE [illegible]

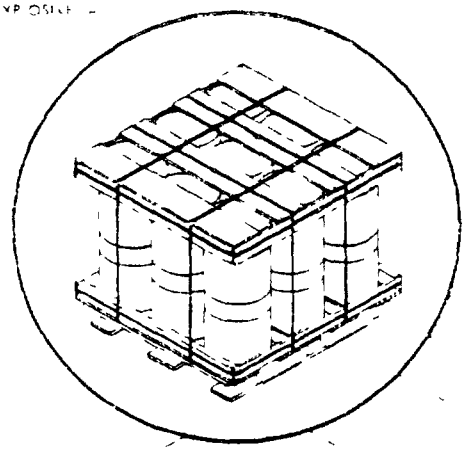

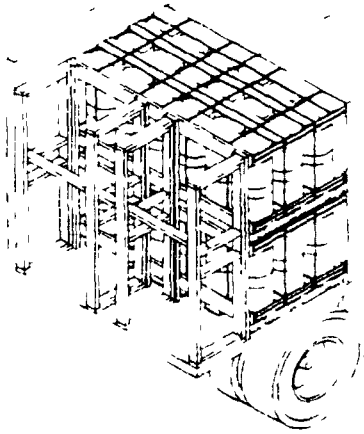

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING CONTAINER LOADING [illegible] MILITARY STANDARDS REFER TO INDEX OF STANDARDS MIL-HDBK-[illegible]

INDEX

ITEM	PAGE
GENERAL NOTES	[illegible]
FTL - 40 FT. VAN	[illegible]
LTL - 40 FT. VAN	[illegible]
UNITIZING PROCEED	[illegible]

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENTS ONLY

[illegible] 9/23/72
SIGNATURE TECHNICAL DIRECTOR/AGENT TO DATE

[illegible] 9/23/72
SIGNATURE ORD [illegible] BY DIRECTION DATE

ORIGINATOR [illegible]
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
NAD EARLE NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING HIGH BULK NITROGUANIDINE WHEN PALLETIZED IN ACCORDANCE WITH MIL-STD-1320.
2. PROCEDURE AND PRACTICES DESCRIBED HEREIN ARE INTENDED FOR 40 FT VAN TYPE TRAILERS WITH THE TRAILER AXLES LOCATED IN THE WESTERN POSITION (AT THE EXTREME REAR OF THE TRAILER).
3. LENGTH OF SPACER PIECE NO. 5 SHALL BE SUCH AS TO CAUSE THE GATE FRAME (DETAIL C) TO BEAR AGAINST THE REAR GATE AND TRAILER DOORS WHEN THE DOORS ARE CLOSED.


WARNING

DO NOT USE TRAILERS WITH ROLL UP DOORS WHEN BLOCKING AND BRACING BY THIS METHOD


4. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
5. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED, ATTACH SHIPPING DOCUMENTS TO INSIDE OF TRAILER IN AN ACCESSIBLE AREA. CLOSE AND SEAL TRAILER DOORS AND ATTACH EXPLOSIVES A PLACARD TO BOTH SIDES, FRONT AND BACK OF TRAILER.
6. APPLICABLE MATERIAL SPECIFICATIONS: DUNNAGE LUMBER MM-L-751; NAILS FF-N-105 COMMON CEMENT COATED (ALTERNATE ANNULAR RING OR CHEMICALLY ETCHED TYPE); STRAPPING QQ-S-781 TYPE I CLASS A.
7. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MILITARY STANDARD 1320 (NAVY).

FTL 40 FT TRAILER (VAN)

1. CERTAIN COMBINATIONS OF VANS AND TRACTORS MAY HAVE A TARE WEIGHT SUFFICIENT TO CAUSE THE COMPLETED FTL TO BE OVERWEIGHT ON THE DRIVE AXLES (EXCEED 32,000 LBS). IF THE TRACTOR TRAILER MEETS ONE OF THE FOLLOWING CONDITIONS A LEGAL LOAD WILL BE POSSIBLE.
   - A. TARE WEIGHT OF THE TRACTOR-TRAILER'S DRIVE AXLES DOES NOT EXCEED 11,000 LBS.
   - B. TRAILER HAS SLIDING TANDEM AXLES THUS PERMITTING WEIGHT TO BE SHIFTED FROM THE DRIVE AXLES TO THE TRAILER AXLES.
   - C. TRACTOR HAS A SLIDING FIFTH WHEEL THUS PERMITTING WEIGHT TO BE SHIFTED FROM THE DRIVE AXLES TO THE STEERING AXLE.

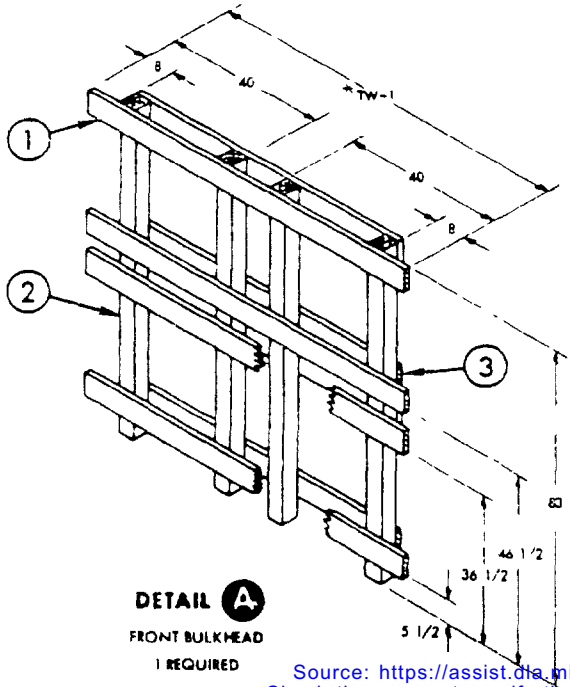


DETAIL A
FRONT BULKHEAD
1 REQUIRED

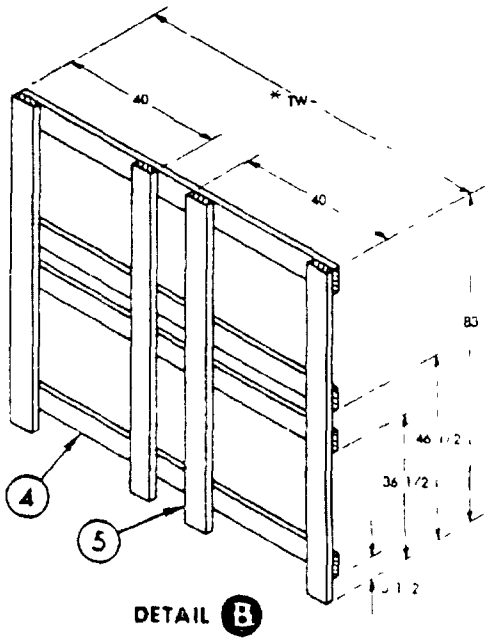


DETAIL B
GATE FRAME
1 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.

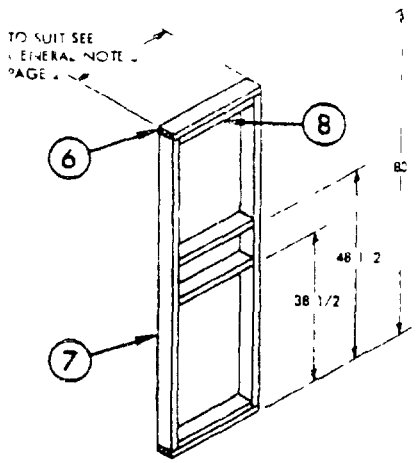


DETAIL C
GATE FRAME
4 REQUIRED

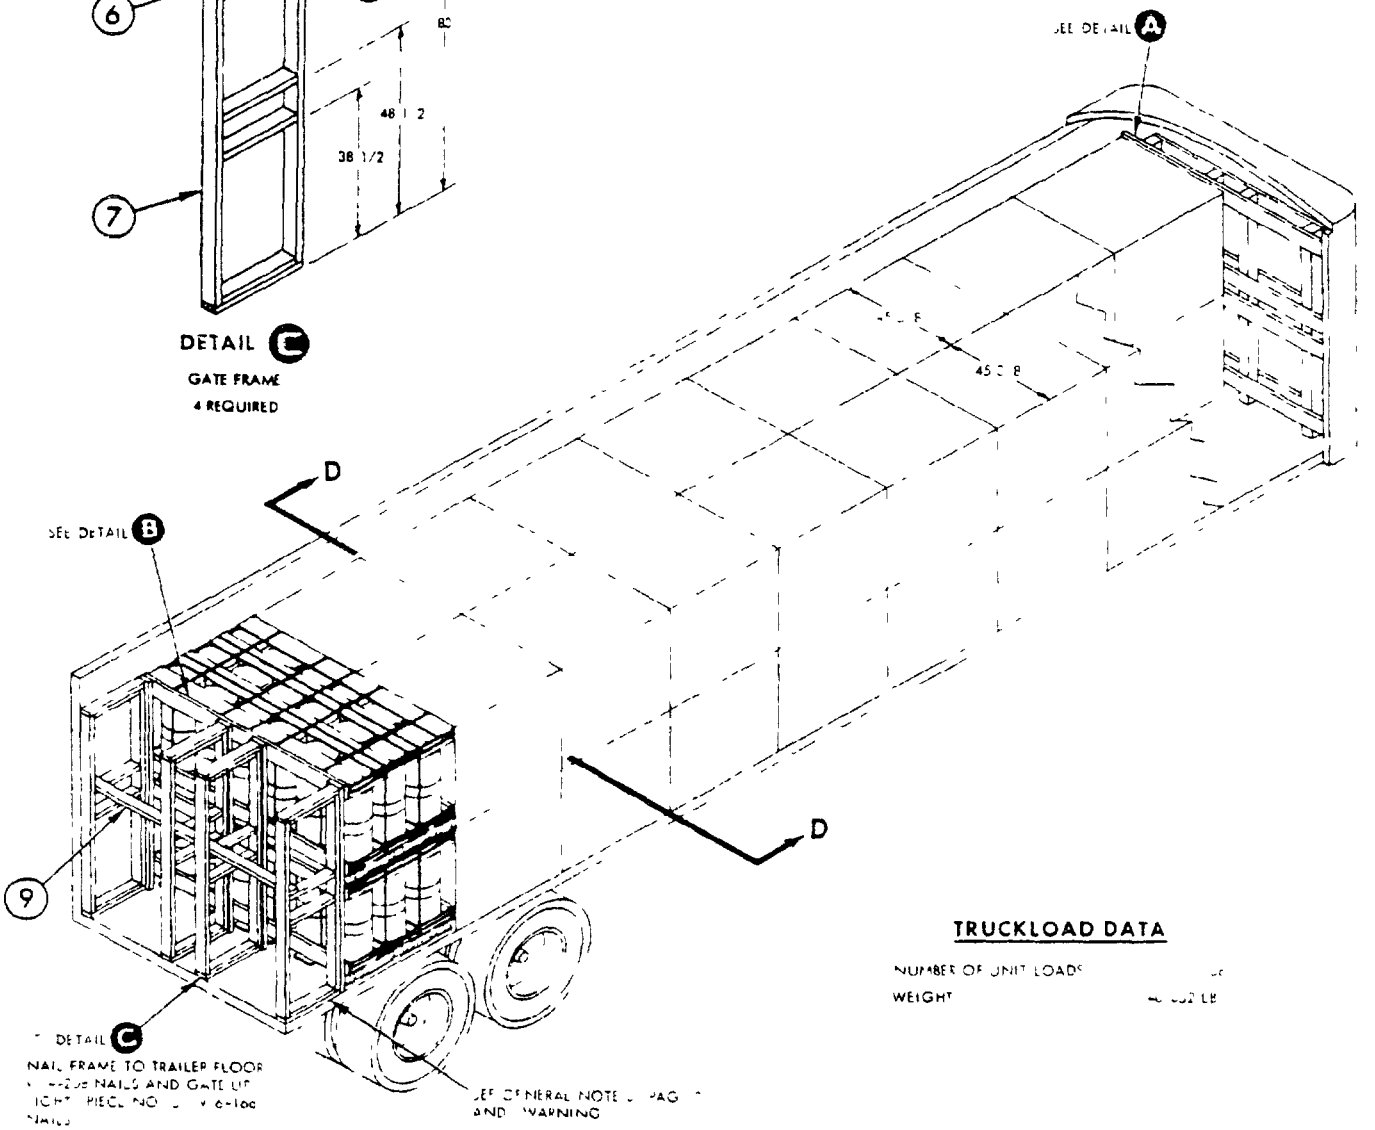

TRUCKLOAD DATA

NUMBER OF UNIT LOADS
WEIGHT

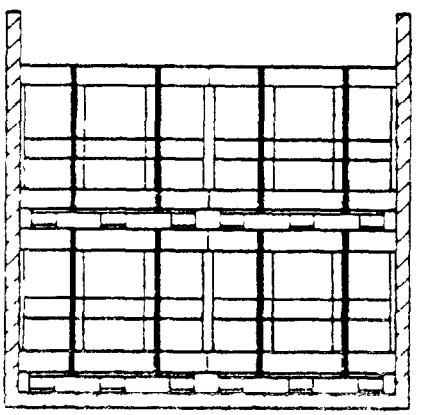

SECTION D-D

*TW - TRAILER WIDTH

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NUMBER	SIZE
					NAILS	
9	SPREADER	2 X 4 X TW*		8	2 JOINT	12d
8	SPACER	2 X 4 TO SUIT	16	7	4	12d
7	UPRIGHT	2 X 4 X 80 REF	4		2 JOINT	12d
6	HORIZONTAL	2 X 4 TO SUIT			2 JOINT	12d
5	UPRIGHT	2 X 6 X 80	4	3	4 JOINT	0d
4	HORIZONTAL	2 X 6 X TW*	4	SEE 5		
3	FWD CROSSMEMBER	2 X 6 TO SUIT	4	5	16	12d
2	VERTICAL	2 X 4 X 80	4	SEE 5		
1	AFT CROSSMEMBER	2 X 6 X TW*	3		3 JOINT	12d

USE OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.


UNITIZING PROCEDURE

WHEN REQUIRED BY THE REQUIREMENTS OF THIS MILITARY STANDARD, THE TWO HIGH STACKED UNIT LOADS SHALL BE STRAPPED AS SHOWN.

2. THE 2 X 6 DOUBLED STIFFENER SHALL EXTEND TO THE TOP OF STACKED UNIT LOADS AND TO THE PALLET OF THE BOTTOM UNIT LOAD. THE STIFFENER SHALL BE LAMINATED WITH 10d NAILS TO PREVENT SHIFTING.

3. THE [illegible] 4 INCH STEEL STRAPS POSITION AS SHOWN ENCIRCLE THE STACKED UNIT LOADS AND PASS UNDER THE DECK OF THE BOTTOM PALLET WITH THE STRAPS HOLDING THE STIFFENERS IN PLACE.












4. TENSION STRAPS AND SEAL WITH TWO DOUBLE CRIMPED SEALS. SECURE EACH STRAP TO THE STIFFENER WITH FOUR [illegible] 4 INCH STAPLES.

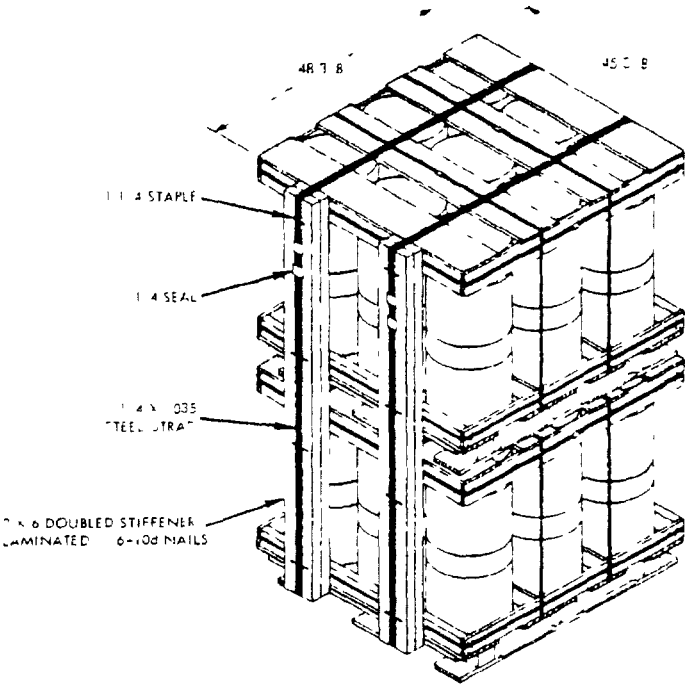

LTL 40 FT TRAILER (VAN)

WHEN REQUIRED TO SHIP FROM 24 TO 35 UNIT LOADS, DETERMINE THE PROPER LOAD PATTERN FROM TABLE I BELOW. BLOCK AND BRACE USING THE PRINCIPLES OF THIS DOCUMENT.

TABLE I

NO. OF UNIT LOADS	LOAD PATTERN*	NO. OF UNIT LOADS	LOAD PATTERN*	NO. OF UNIT LOADS	LOAD PATTERN*
35		3		27	
34		30		26	
33		29		25	
32		28		24	


* LOAD PLAN SHOWS TRAILER FLOOR PLAN. NUMBERS IN BLOCKS INDICATE NUMBER OF UNIT LOADS IN LAYER.

WHEN SHIPPING LESS THAN 24 UNIT LOADS, DECREASE THE REMAINING UNIT LOADS IN THE SECOND LAYER BEFORE DECREASING THE NUMBER OF UNIT LOADS ON THE TRAILER FLOOR. BLOCK AND BRACE USING THE PRINCIPLES OF THIS DOCUMENT.

[illegible] ON PAGES 5 & 6 ARE FOR [illegible] AND [illegible] CORRECT METHOD OF BLOCKING AND BRACING THESE LOADS.


[illegible] PREVENT LONGITUDINAL MOVEMENT IN THE SECOND LAYER, 40 UNIT LOADS SHALL BE UNITIZED (SEE UNITIZING DETAIL PAGE 4 WHERE THE LAYERS CHANGE FROM FIVE TIER AND FOUR TIER TO TWO LAYERS HIGH). THE STIFFENERS SHALL BE POSITIONED AS SHOWN IN [illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.

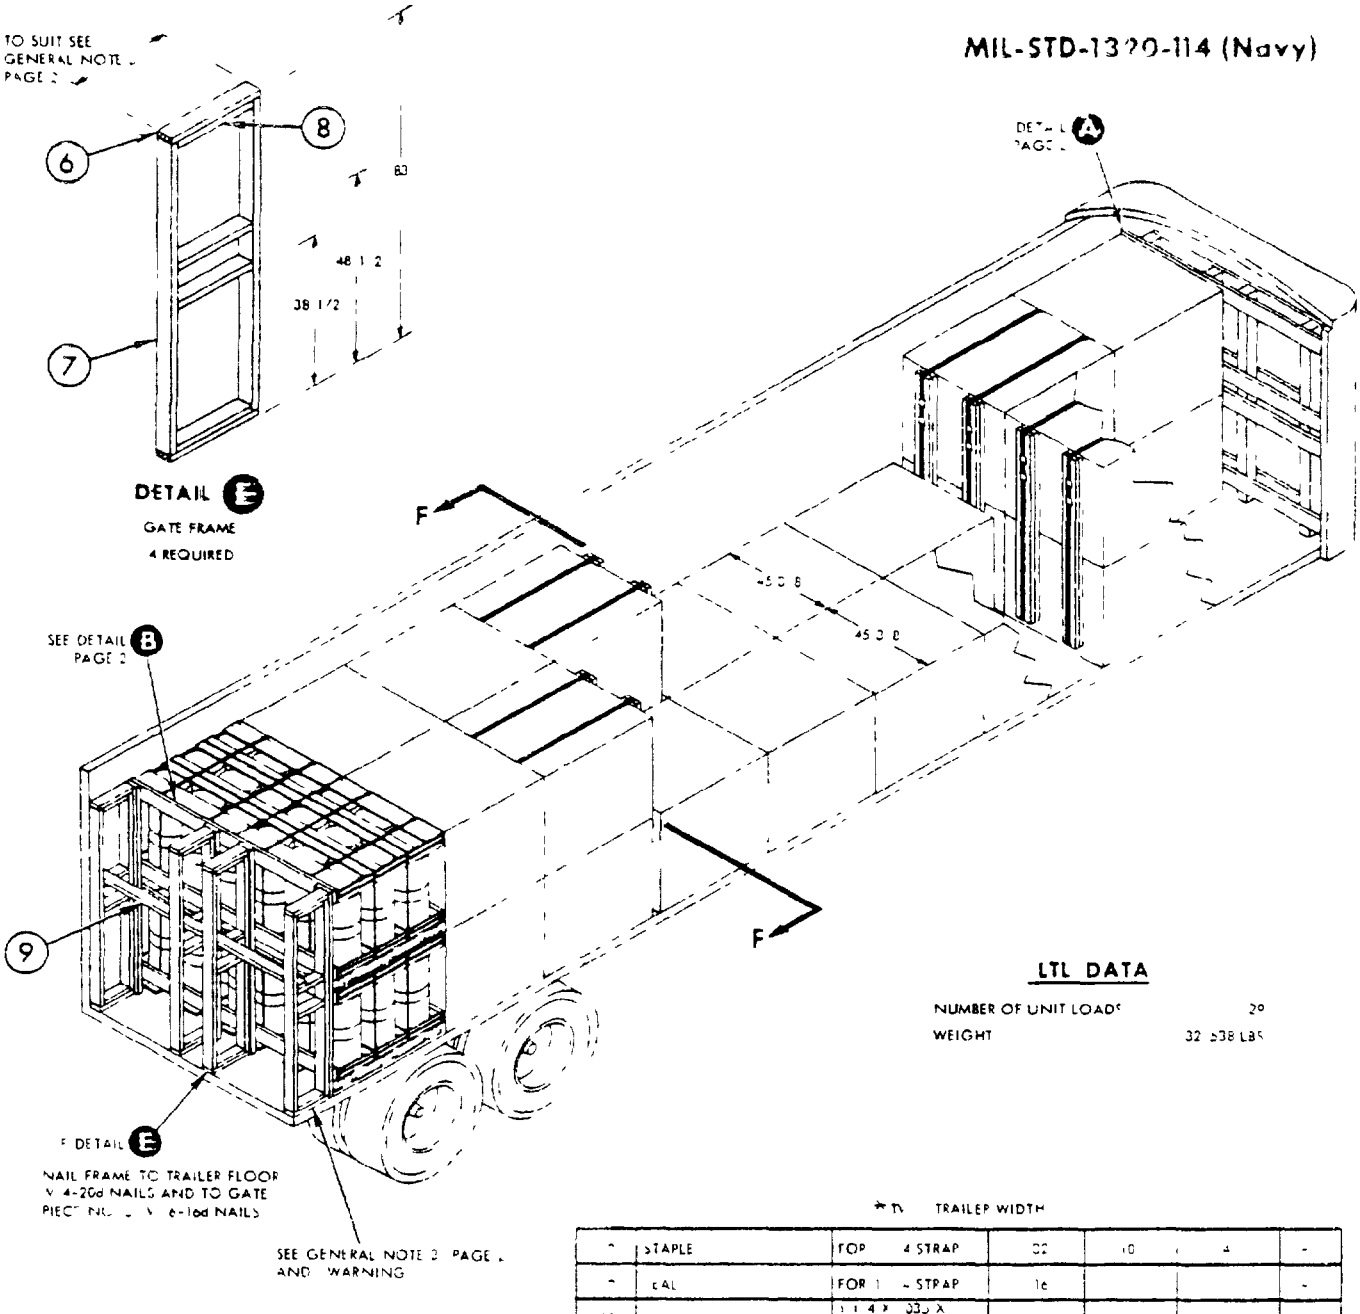

LTL DATA

NUMBER OF UNIT LOADS	20
WEIGHT	32 538 LBS

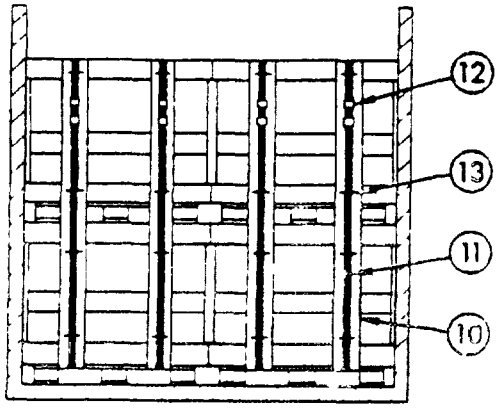


SECTION F-F

* TW = TRAILER WIDTH


PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NAILS NUMBER	NAILS SIZE
1	STAPLE	FOR 4 STRAP	32	10	4	-
1	SEAL	FOR 1 SEAL STRAP	16			-
11	STRAP	1 1/4 X .035 X 24 FT	8	-	-	-
10	STIFFENER	2 X 6 X [illegible] 2	16	LAMINATE	4	6d
9	SPREADER	2 X 4 X TW* -		8	4 JOINT	12d
	SPACER	2 X 4 TO SUIT	12		4	12d
8	UPRIGHT	2 X 4 X 80 REF	4		2 JOINT	2d
9	HORIZONTAL	2 X 4 TO SUIT	8		2 JOINT	12d
5	UPRIGHT	2 X 6 X 83	4	4	4 JOINT	10d
4	HORIZONTAL	2 X 6 X TW* 1	4	EE 5	-	
3	FWD CROSSMEMBER	2 X 6 TO SUIT	4	2	2 JOINT	12d
2	VERTICAL	4 X 4 X 83	4	SEE * 3		-
	AFT CROSSMEMBER	2 X 6 X TW* 1	4		JOINT	2d

LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.

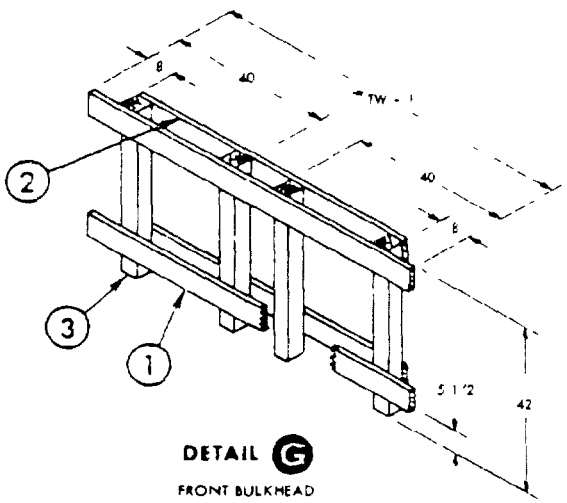

DETAIL G
FRONT BULKHEAD
1 REQUIRED

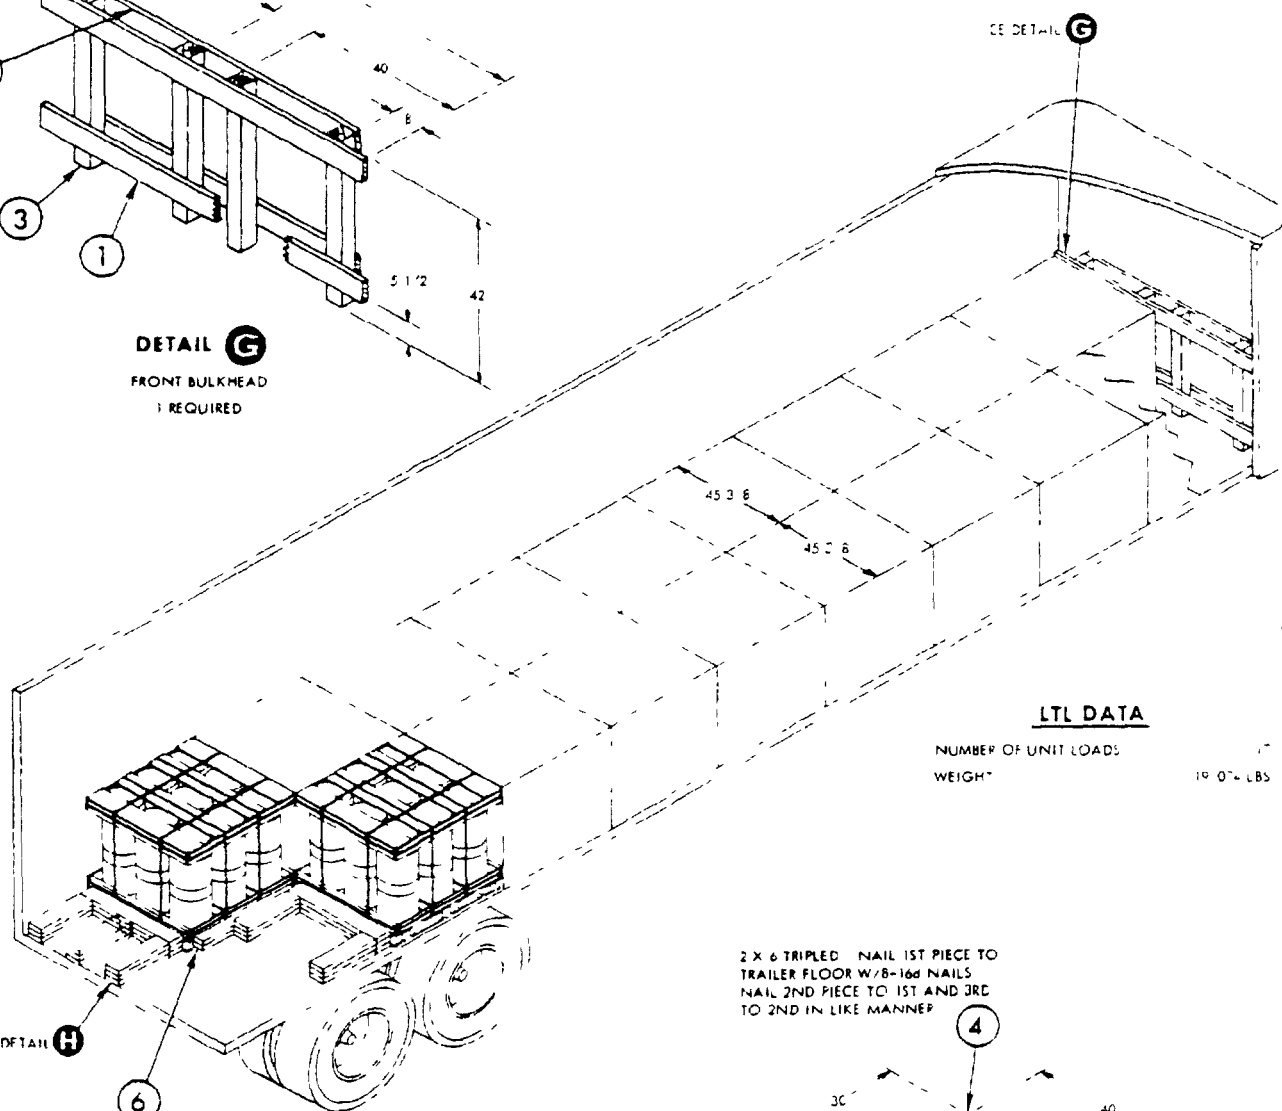


2 X 4 DOUBLED NAIL 1ST PIECE TO TRAILER FLOOR W/ -16d NAIL EVERY 8 INCHES NAIL 2ND PIECE TO 1ST IN LIKE MANNER

LTL DATA

NUMBER OF UNIT LOADS
WEIGHT 19 07- LBS

2 X 6 TRIPLED NAIL 1ST PIECE TO TRAILER FLOOR W/8-16d NAILS NAIL 2ND PIECE TO 1ST AND 3RD TO 2ND IN LIKE MANNER

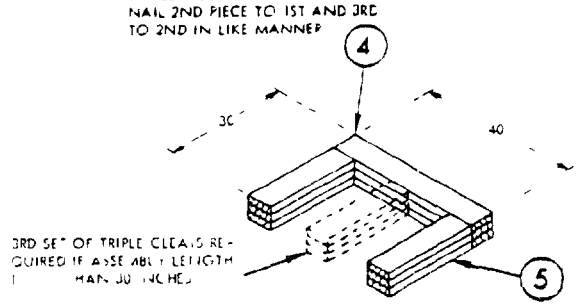

3RD SET OF TRIPLE CLEATS REQUIRED IF ASSEMBLY LENGTH [illegible] MAY 30 INCHES

DETAIL H
REAR BLOCKING
2 REQUIRED

2 X 6 TRIPLED NAIL 1ST PIECE TO TRAILER FLOOR W/8-16d NAILS NAIL 2ND PIECE TO 1ST AND 3RD TO 2ND IN LIKE MANNER

* TW TRAILER WIDTH

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NUMBER	SIZE
					NAILS	
6	SLEEPER	2 X 4 X 42	2	SEE FIELD NOTE		
5	BACKUP CLEAT	2 X 6 X 24 [illegible]	2	SEE DETAIL		
4	CROSSMEMBER	2 X 6 X 41	6	SEE DETAIL		
3	FWD CROSSMEMBER	2 X 6 TO SUIT	2		1 JOINT	16d
2	VERTICAL	1 X 4 X 42	4	FE & 3		
1	AFT CROSSMEMBER	2 X 6 X TW * 1	2		1 JOINT	16d

LIST OF MATERIALS AND NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:44Z
Check the source to verify that this is the current version before use.