# MILITARY STANDARD

## TRUCKLOADING

### BOOSTER MK 12 MOD 0 & 1

### IN CONTAINER MK 200 MOD 0 & 1

**MIL-STD-1320-18A (NAVY)**

**5 APRIL 1991**


SUPERSEDING
MIL-STD-1320-18
24 NOVEMBER 1972

## CONTAINER DATA

DIMENSIONS.....L=167 W=27 H=29 1/4
GROSS WEIGHT.....2,665 LBS △
TARE WEIGHT.....825 LBS
CUBE.....76.3 CU FT

△ DO NOT USE FOR SHIPPING WEIGHT

FOR HAZARD CLASSIFICATIONS SEE NAVSEA OP 2165

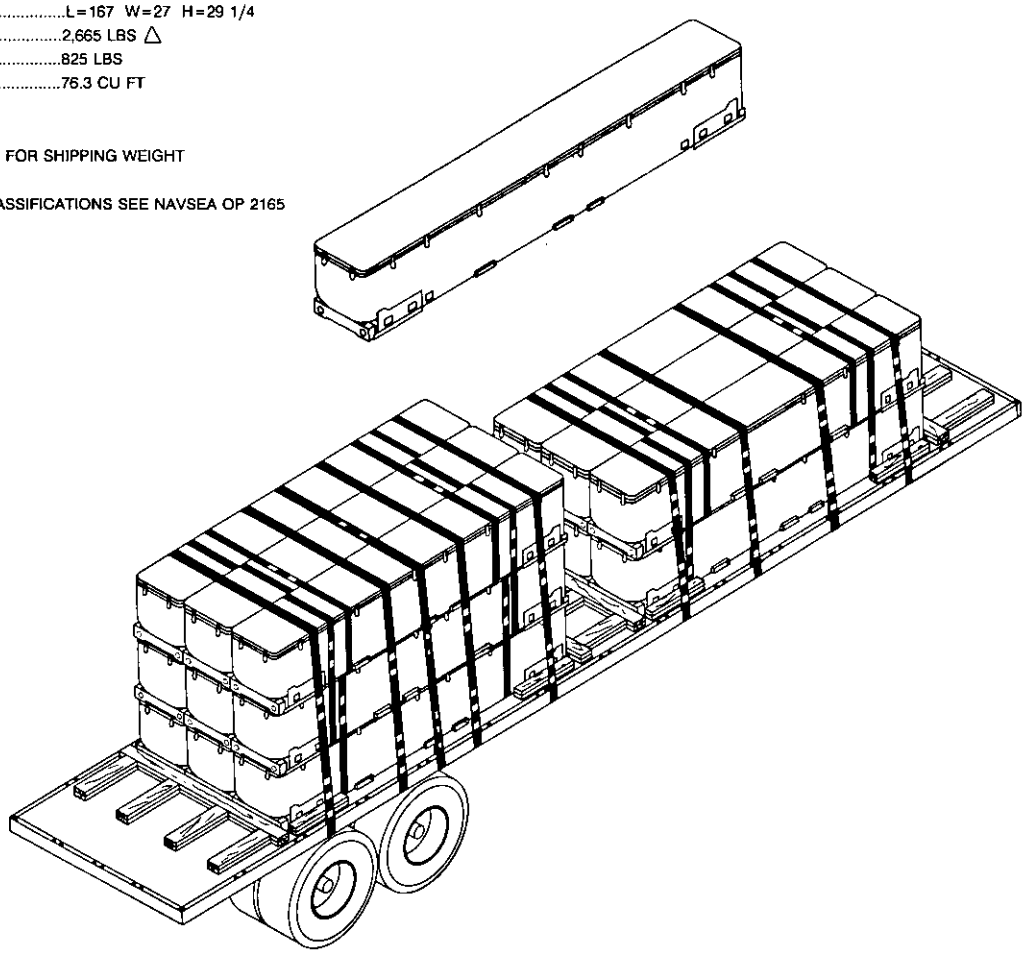

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.

| REV LTR | REVISION DESCRIPTION | DATE | TDA | SYSCOM |
|---|---|---|---|---|
| | | | APPROVAL | |
| A | REVISED UNITIZING PROCEDURE | 4/5/91 | | |

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

FSC 8140

AUTHORIZED AND RELEASED
FOR HIGHWAY SHIPMENT ONLY.

S/ M. S. GRAY 10/13/72
SIGNATURE TDA, WPNSTA EARLE DATE

S/ J. E. KELLY 10/13/72
SIGNATURE SEASYSCOM BY DIRECTION DATE

ORIGINATOR S/L. D. BLANCHARD 10/13/72
DATE

WPNSTA EARLE, NEW JERSEY



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

**GENERAL NOTES:**


1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING THE BOOSTER MK 12 MOD 0 AND 1 IN THE MK 200 MOD 0 AND 1 CONTAINER.
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 40 FT THRU 45 FT FLATBED TRAILERS WITH THE TRAILER'S TANDEM AXLES LOCATED IN THE "WESTERN POSITION" (AT THE EXTREME REAR OF THE TRAILER). DO NOT USE TRAILERS WITH ALL METAL FLOORS.
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE-TO-ONE BASIS FOR TIEDOWNS.
4. STEEL STRAPPING USED AS TIEDOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. CHAINS, FITTINGS, AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY), EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
6. PROTECTOR BOARDS (DOUBLED 2 X 6'S) SHALL BE USED UNDER THE TIEDOWNS. STRAPS SHALL BE SECURED TO THE PROTECTOR BOARDS USING 2-INCH STRAPPING STAPLES. WHEN USING CHAIN, THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARDS BY DRIVING A 10d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN. FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIEDOWN.
7. BEFORE LOADING ONTO THE TRAILER, CONTAINERS SHALL BE UNITIZED AS SHOWN ON PAGES 6 AND 8.
8. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS, AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR, AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS, AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
9. UNLESS OTHERWISE SPECIFIED, DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS, AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT MIL-STD-1320 (NAVY).
10. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS, AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
11. AFTER THE BLOCKING, BRACING, AND TIEDOWNS HAVE BEEN INSPECTED, THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT, WATERPROOF TARPAULINS. THE TARPAULINS MAY BE UNDER THE TIEDOWNS AND THE PROTECTOR BOARDS.
12. AFTER THE TARPAULINS ARE IN PLACE, ATTACH THE PROPER EXPLOSIVES PLACARDS TO BOTH SIDES, FRONT, AND BACK OF THE TRAILER, AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER.
12. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

**NOTE**


THIS FTL ILLUSTRATES THE USE OF 2 x .050 STRAPS. CHAINS AND LOAD BINDERS ARE AN AUTHORIZED ALTERNATE (SEE GENERAL NOTES 4 & 5) AND SHOULD BE APPLIED AS SHOWN ON PAGE 5.

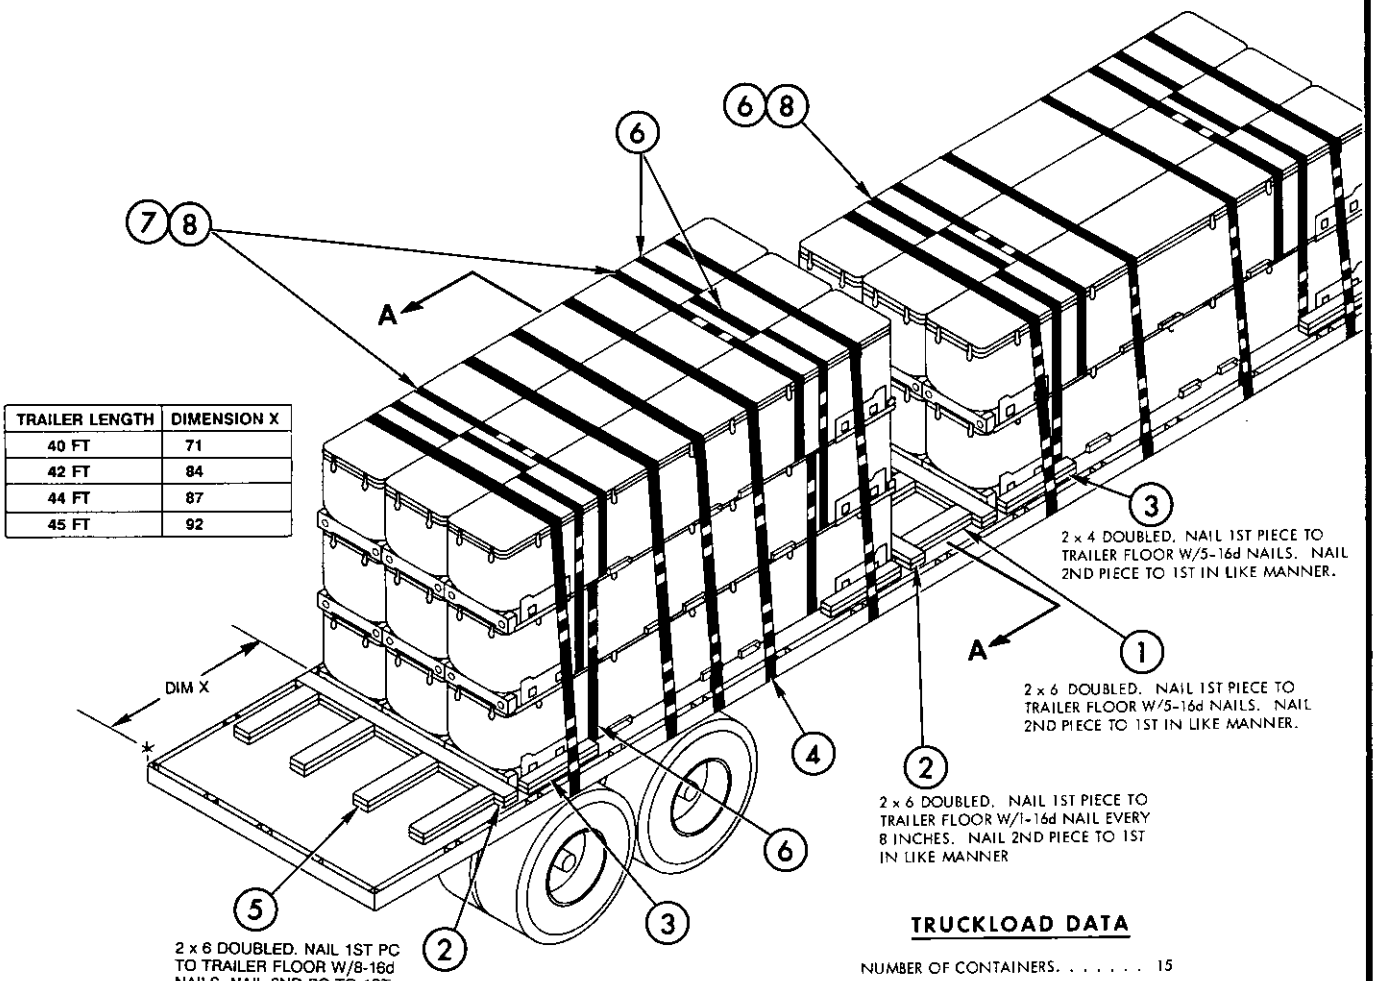


| TRAILER LENGTH | DIMENSION X |
|---|---|
| 40 FT | 71 |
| 42 FT | 84 |
| 44 FT | 87 |
| 45 FT | 92 |

**TRUCKLOAD DATA**

NUMBER OF CONTAINERS. . . . . 15
WEIGHT. . . . . 39,975 LBS

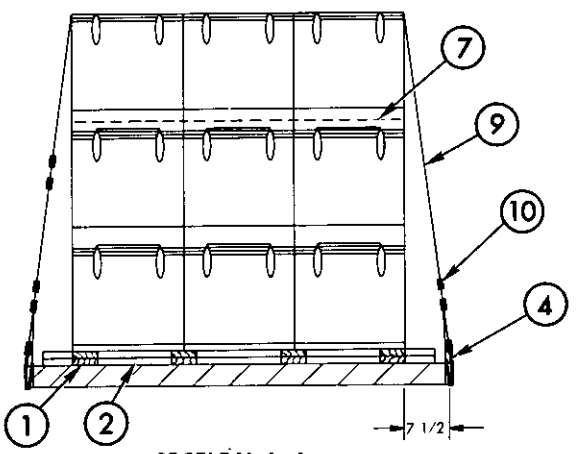


**SECTION A-A**

| PIECE NO. | DESCRIPTION | SIZE | NO. OF PIECES REQ'D |
|---|---|---|---|
| 10 | SEAL | FOR 2" STRAP | 72 |
| 9 | TIE-DOWN STRAP | 2 x .050 x 32 FT | 9 |
| 8 | SEAL | FOR 1 1/4" STRAP | 44 |
| 7 | CROSS STRAP | 1 1/4 x .035 x 21 FT 0 | 4 |
| 6 | UNITIZING STRAP | 1 1/4 x .035 x 17 FT 0 | 18 |
| 5 | BACKUP CLEAT | 2 x 6 x 30 | 16 |
| 4 | STAKE POCKET PAD (STRAPPING) | 2 x .050 x 24 | 14 |
| 3 | SLEEPER | 2 x 4 x 30 | 16 |
| 2 | CROSS MEMBER | 2 x 6 x 88 | 8 |
| 1 | STRUT | 2 x 6 x 24 | 8 |

LIST OF MATERIALS

**FTL- 40 FT. TRAILER (FLATBED)**




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

# LTL-40 FT TRAILER (FLATBED)

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF CONTAINERS TO BE SHIPPED FROM TABLE I AND POSITION CONTAINERS ON THE TRAILER ACCORDINGLY.


**TABLE I**

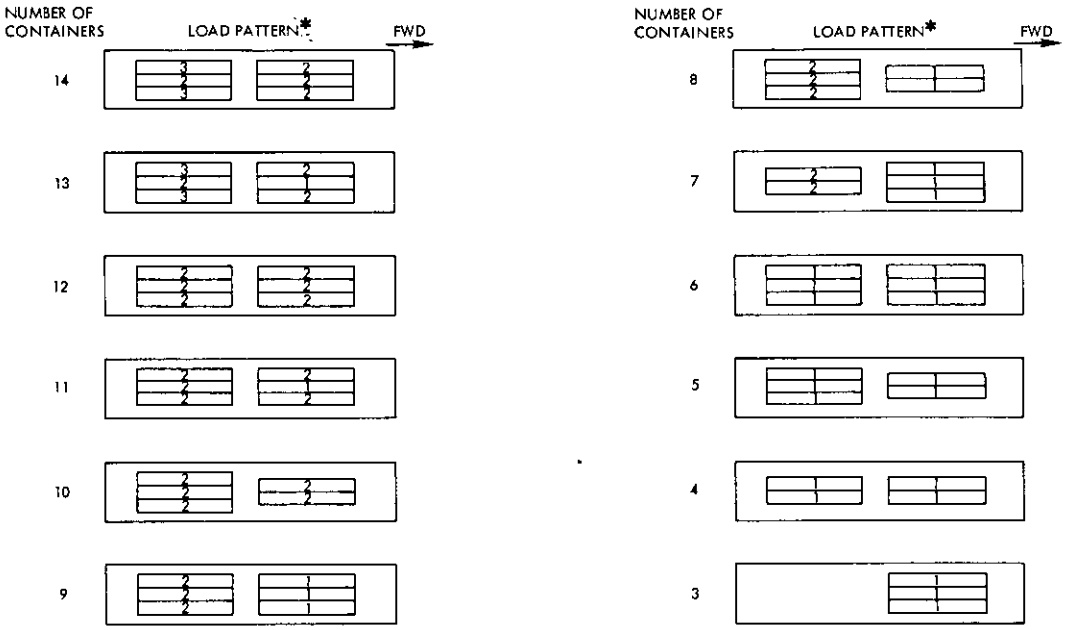


*LOAD PATTERN SHOWS FLOOR PLAN FOR TRAILER. NUMBER INDICATES THE NUMBER OF CONTAINERS IN A LAYER.

2. WHEN THE CENTER OF THE TOP LAYER OF A STACK DOES NOT HAVE A CONTAINER (SEE LOAD PLAN FOR 14 CONTAINERS) THE * FILLER ASSEMBLY DETAIL B SHALL BE USED. SECURE THE ASSEMBLY TO THE TWO INCH LOAD STRAPS TO PREVENT LONGITUDINAL MOVEMENT.
3. ALL STACKS OF THREE (3) HIGH CONTAINERS SHALL BE SECURED TO THE TRAILER WITH FIVE (5) STRAPS (OR CHAINS). STACKS OF CONTAINERS TWO (2) HIGH SHALL BE SECURED WITH FOUR (4) STRAPS (OR CHAINS).
4. THE LTL SHOWN IN PAGE 5 IS FOR FOURTEEN (14) CONTAINERS AND SHOWS THE CORRECT BLOCKING, BRACING AND TIEDOWNS FOR A TRUCKLOAD OF THIS QUANTITY.
5. THE LTL PLAN SHOWN ON PAGE 5 DOES NOT LIMIT LTL SHIPMENTS TO THIS QUANTITY. ITS PRESENTATION IS INTENDED TO EXPLAIN THE CORRECT METHODS OF LOADING LTL SHIPMENTS.


* FOR ALTERNATE FILLER ASSY SEE DETAIL D ON PAGE 7.

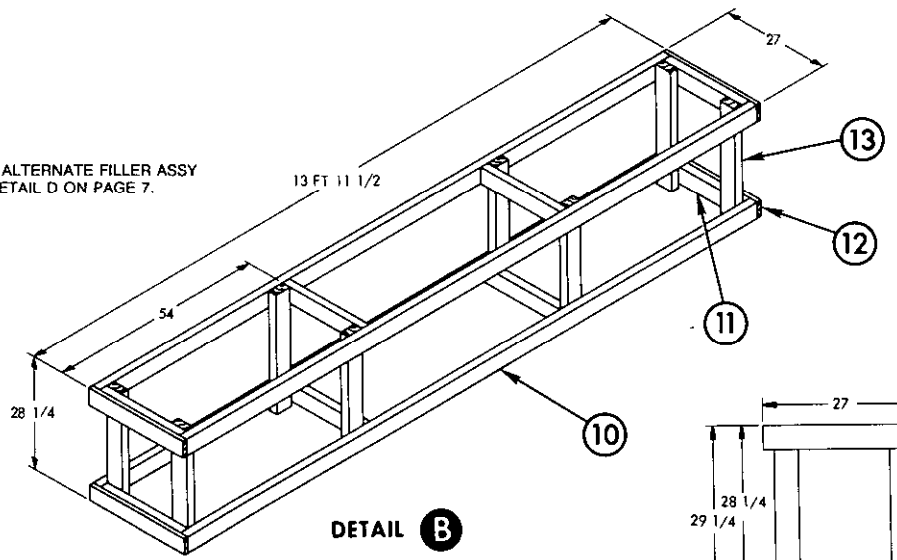


**DETAIL B**

FILLER ASSEMBLY

THE FILLER ASSEMBLY AS SHOWN IS TO BE USED IN "LESS THAN TRUCKLOADS" IN PLACE OF AN OMITTED CONTAINER.

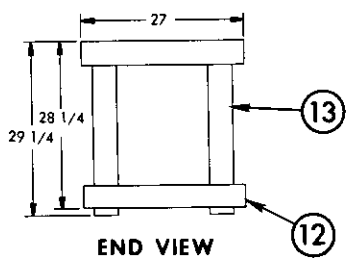



**END VIEW**



Source: https://assist.dla.mil -- Downloaded: 2020-10-23T23:43Z
Check the source to verify that this is the current version before use.

**NOTE**

THIS LTL SHOWS THE PROPER APPLICATION OF CHAINS AND LOAD BINDERS. TWO INCH STRAP IS AN AUTHORIZED ALTERNATE AND SHOULD BE APPLIED AS SHOWN ON PAGE 3.

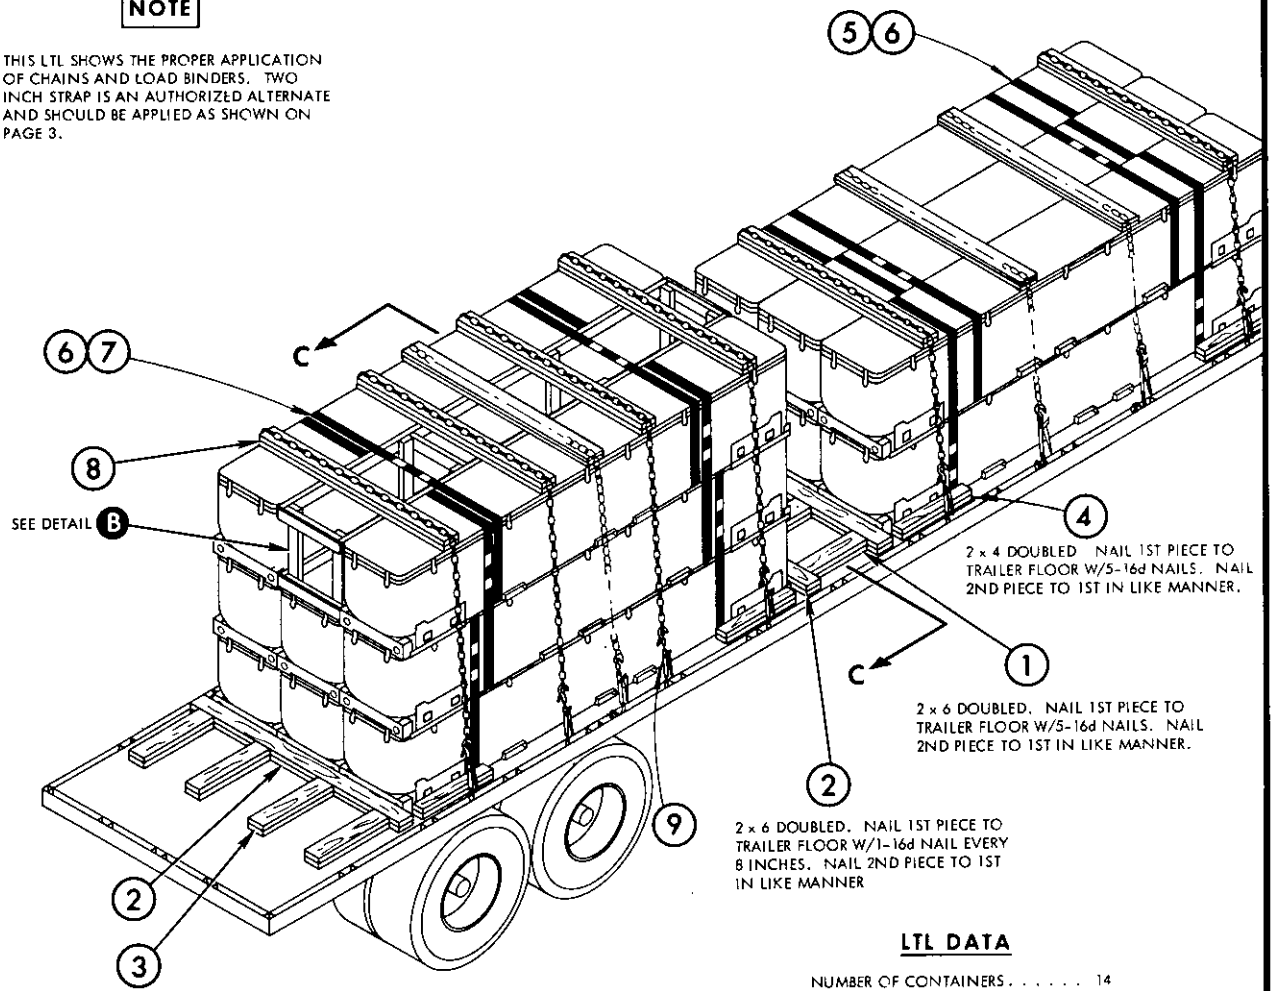



## LTL DATA

NUMBER OF CONTAINERS . . . . . 14

LTL WEIGHT . . . . . 37,310 LBS

* NAIL PIECE 11 W/5-6d NAILS AND TO PIECE 10 W/2-8d NAIL PER JOINT

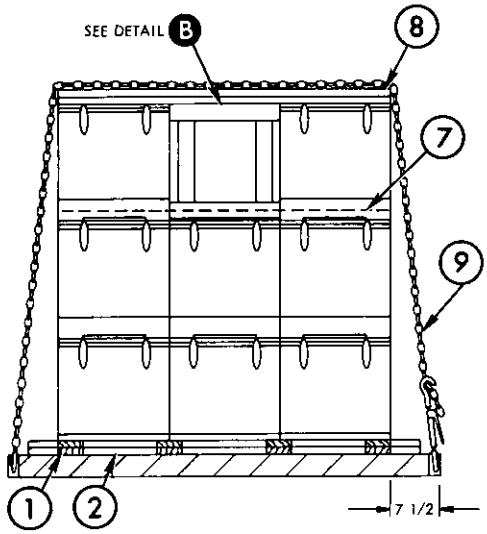


SECTION C-C

| PIECE NO. | DESCRIPTION | SIZE | NO. OF PIECES REQ'D |
|---|---|---|---|
| 13 | VERTICAL | 2 x 4 x 29 1/4 | 8 |
| 12 | END PIECE | 1 x 4 x 27 | 4 |
| 11 | CROSS BRACE | 2 x 4 CUT TO FIT | 8 |
| 10 | HORIZONTAL | 2 x 4 x 13 FT 9 1/2 IN | 4 |
| 9 | CHAIN & LOAD BINDER | 3/8 | 9 |
| 8 | PROTECTOR BOARD | 2 x 6 x 81 | 18 |
| 7 | CROSS STRAP | 1 1/4 x .035 x 21 FT | 4 |
| 6 | SEAL | FOR 1 1/4 STRAP | 40 |
| 5 | UNITIZING STRAP | 1 1/4 x .035 x 17 FT | 16 |
| 4 | SLEEPER | 2 x 4 x 30 | 16 |
| 3 | BACKUP CLEAT | 2 x 6 x 30 | 16 |
| 2 | CROSSMEMBER | 2 x 6 x 88 | 8 |
| 1 | STRUT | 2 x 6 x 24 | 8 |

LIST OF MATERIALS




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

# FTL-40 FT. TRAILER (VAN TYPE)

**NOTE**

SHIPMENTS IN VAN TYPE TRAILERS ARE AUTHORIZED ONLY WHEN FLAT BED TRAILERS ARE NOT AVAILABLE.

1. A FULL TRUCKLOAD FOR A 40 FT VAN CONSISTS OF 12 MISSILE CONTAINERS.
2. CONTAINERS ARE HANDLED AND POSITIONED INTO VAN TYPE TRAILERS WITH TWO MK 40 MOD 0 HAND LIFT TRUCKS (SEE BELOW), OR A COMBINATION OF HAND LIFT TRUCKS AND FORK LIFT TRUCKS.
3. CONTAINERS STACKED TWO HIGH SHALL BE UNITIZED WITH THE AFT END AT THE TOP CONTAINER PLACED OVER THE FWD END OF THE BOTTOM CONTAINER AS SHOWN BELOW.

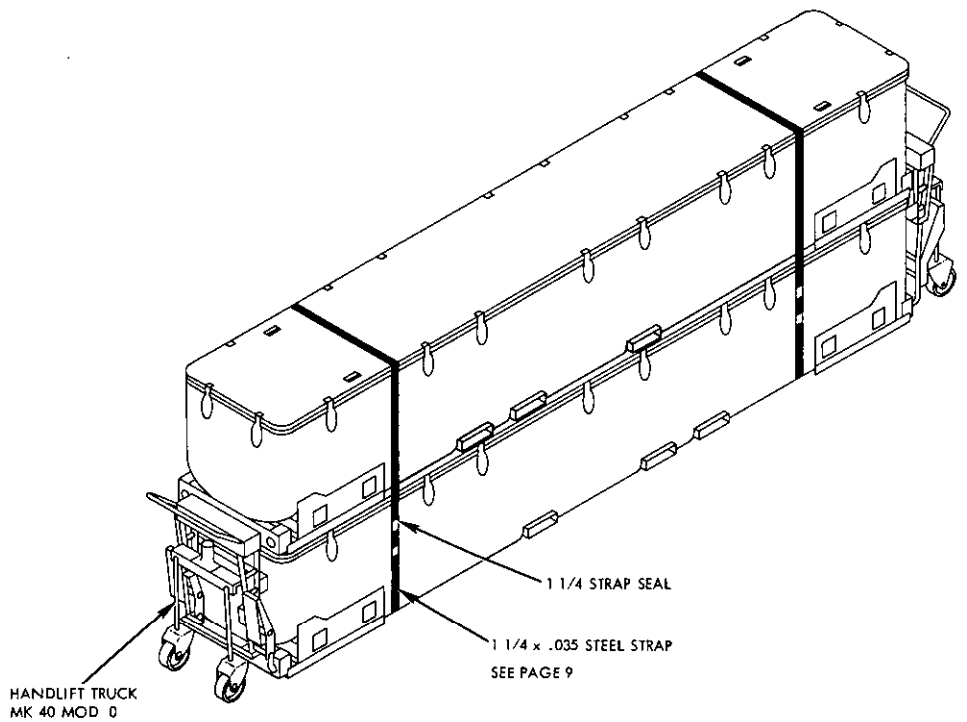


**WARNING**


TO AVOID TOPPLING, SPECIAL CARE SHOULD BE TAKEN WHEN MOVING STACKS OF CONTAINERS BY HAND LIFT TRUCK, ESPECIALLY WHEN THE SURFACE IN THE DIRECTION OF THE MOVE IS UNEVEN OR NOT LEVEL. THE UNITIZING OF CONTAINERS IS AUTHORIZED AS PART OF THE TRUCK-LOADING PROCEDURE ONLY. UNITIZING FACILITATES HANDLING IN LOADING AND UNLOADING THE VAN AND MOVEMENT OF UNITIZED CONTAINERS SHOULD BE LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE VAN.




Source: https://assist.dla.mil -- Downloaded: 2020-10-23T23:43Z
Check the source to verify that this is the current version before use.

## DETAIL D

ALTERNATE FILLER ASSEMBLY

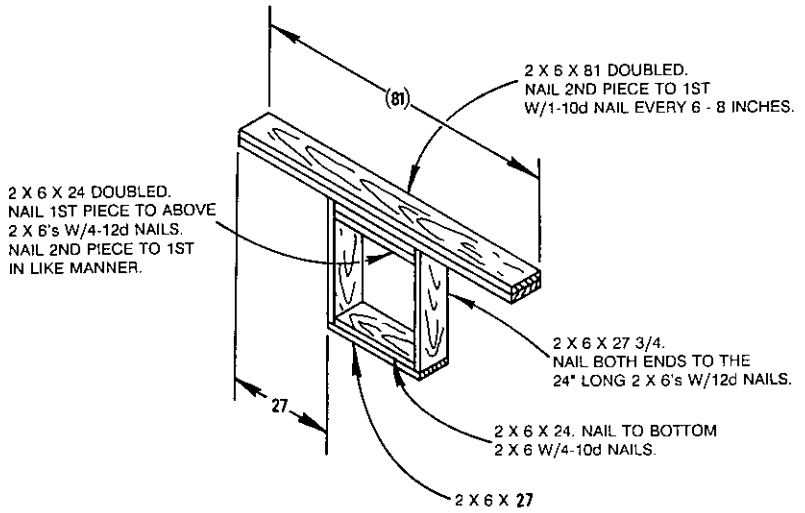


NOTE: FILLER ASSEMBLY SHALL BE POSITIONED SUCH THAT THE SPACER BOARDS DO NOT TOUCH THE CONTAINER LATCHES.

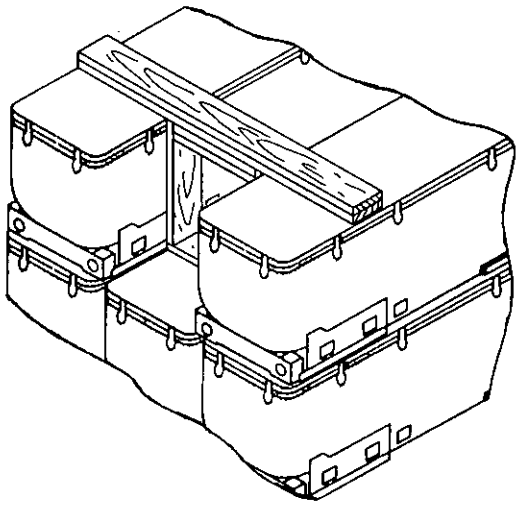




Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.

# UNITIZING & HANDLING PROCEDURE

**NOTE**

UNITIZE TWO HIGH WHEN REQUIRED BY LOAD PLAN

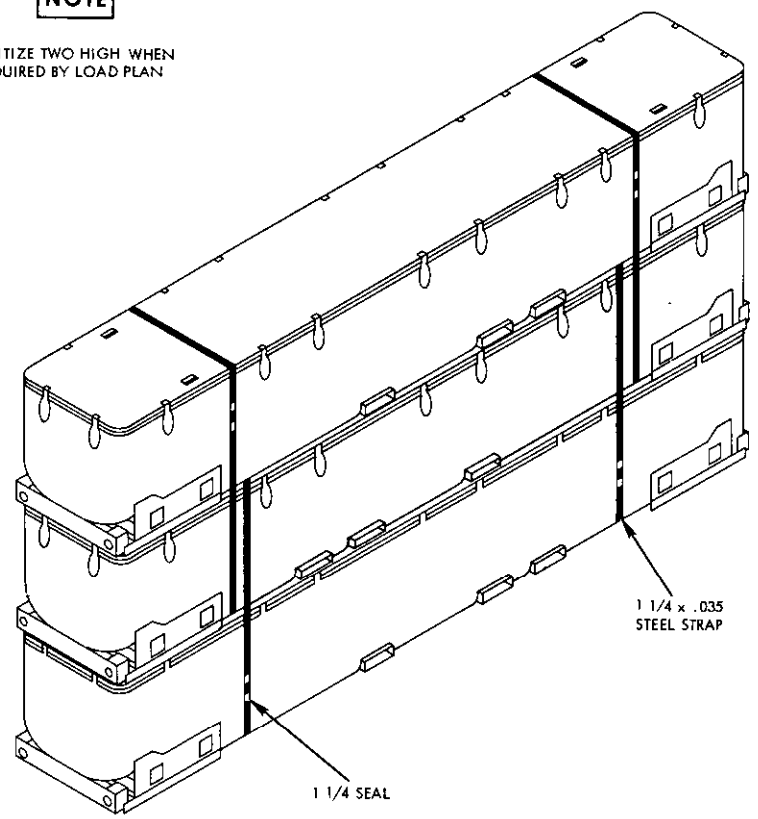


**CONTAINER UNITIZING PROCEDURE:**

1. PLACE TWO OR MORE PIECES OF LUMBER CROSSWISE ON FLOOR OR GROUND NEXT TO CONTAINERS.
2. USING A FORK LIFT TRUCK OR AN APPROPRIATE HOISTING DEVICE EQUIPPED WITH A MK 77 MOD 3 HOISTING SLING, STACK CONTAINERS ON THE LUMBER PIECES.
3. BE CERTAIN THAT THE NESTING FEATURES AND BEARING SURFACES ARE PROPERLY POSITIONED TO PREVENT SHIFTING IN LATERAL AND LONGITUDINAL DIRECTIONS.
4. PLACE CENTER CONTAINER OVER BOTTOM CONTAINER WITH THE FWD END OVER THE AFT END.
5. SECURE BOTTOM CONTAINER TO CENTER CONTAINER WITH TWO STRAPS POSITIONED AS SHOWN ABOVE.
6. SEAL WITH TWO SEALS PER STRAP AND DOUBLE NOTCH THE SEALS.
7. REPEAT THIS OPERATION TO SECURE CENTER CONTAINER TO TOP CONTAINER.

**CONTAINER HANDLING PROCEDURE:**

1. CONTAINERS ARE HANDLED AND POSITIONED ON FLATBED TRAILERS WITH A SUITABLE HOISTING DEVICE EQUIPPED WITH A MK 77 MOD 3 SLING OR PLACED IN POSITION WITH A FORK LIFT TRUCK.
2. SEE PAGE 6 FOR HANDLING PROCEDURE IN VANS.
3. WHEN LOADING THE MIDDLE ROW WITH A 6,000 LB CAPACITY FORKLIFT TRUCK, TINE EXTENSIONS MUST BE USED AND ONLY ONE CONTAINER CAN BE PLACED AT A TIME ON THE TRAILER. ALL UNITIZATION FOR THE MIDDLE ROW WILL HENCEFORTH BE DONE ON THE TRAILER. A CRANE CAN LOAD A MIDDLE ROW OF THREE HIGH CONTAINERS. A 10,000 LB CAPACITY FORKLIFT CAN LOAD A STACK OF TWO CONTAINERS WITH THE THIRD CONTAINER STRAPPED ON TOP OF THE FIRST TWO AFTER LOADING ONTO THE TRAILER.

**WARNING**

TO AVOID TOPPLING, SPECIAL CARE SHOULD BE TAKEN WHEN MOVING STACKS OF CONTAINERS. THE UNITIZING OF THE CONTAINERS IS AUTHORIZED AS PART OF THE TRUCKLOADING PROCEDURE ONLY. UNITIZING IS TO ENSURE CONTINUOUS ENGAGEMENT OF THE STACKING FEATURES AND MOVEMENT OF UNITIZED CONTAINERS SHOULD BE LIMITED TO THAT NECESSARY TO LOAD OR UNLOAD THE TRAILER.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:43Z
Check the source to verify that this is the current version before use.