MILITARY STANDARD

MIL-STD-1320-249
(NAVY)
11 JANUARY 1990


TRUCKLOADING

GUIDED MISSILE, AGM-65 (MAVERICK)

IN CONTAINER, SHIPPING AND STORAGE,

CNU-399/E OR CNU-472/E

UNIT LOAD FOR UNDERWAY REPLENISHMENT

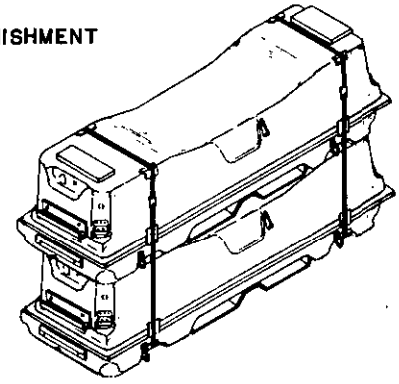


UNIT LOAD DATA

UNIT LOAD DOCUMENT MIL-STD-1323-347
DIMENSIONS . . . . 110 L X 32 W X 58.4 H
GROSS WEIGHT . . . . . 2044 LBS Δ
CUBE . . . . . 118 CU FT

Δ DO NOT USE FOR SHIPPING WEIGHT

HAZARD CLASSIFICATION		
DODIC/NALC	ITEM NAME	DOT
PB69	MISSILE	CLASS A

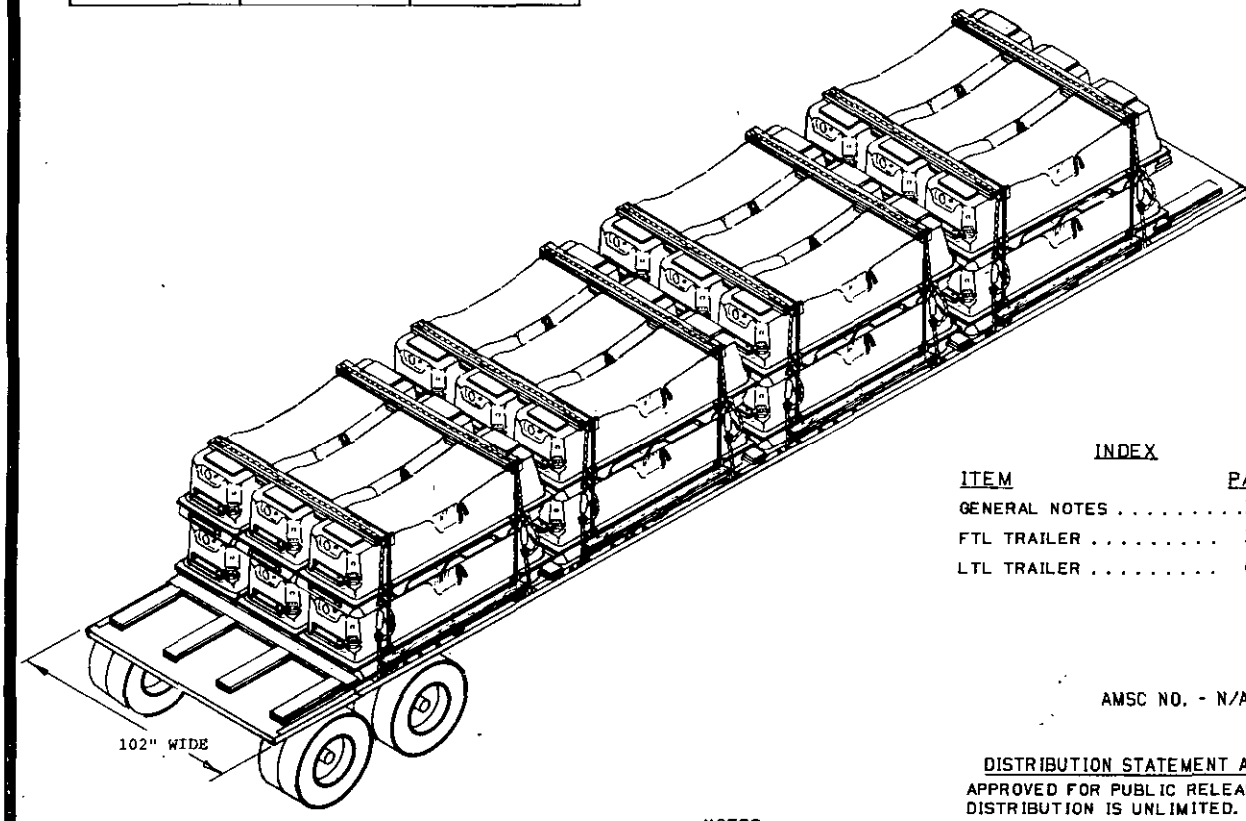

INDEX

ITEM	PAGE
GENERAL NOTES	2
FTL TRAILER	3
LTL TRAILER	6

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

AUTHORIZED AND RELEASED FOR HIGHWAY SHIPMENT ONLY.

C Ewald 1-10-90
SIGNATURE TDA, WPNSTA EARLE DATE

SIGNATURE AIRSYSCOM BY DIRECTION 1/11/90 DATE

ORIGINATOR D Bender 1/8/90
DATE

WPNSTA EARLE, NEW JERSEY


Source: https://assist.dla.mil - Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1. THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR TRUCKLOADING GUIDED MISSILE, AGM-65 (MAVERICK) SHIPPING AND STORAGE CONTAINER, CNU-399/E OR CNU-472/E.
2. THE PROCEDURES DESCRIBED HEREIN ARE INTENDED FOR 45 FT THROUGH 48 FT MIN 102 IN. WIDE FLATBED TRAILERS. DO NOT USE TRAILERS WITH METAL FLOORS.
3. CHAINS AND STEEL STRAPPING MAY BE USED INTERCHANGEABLY ON A ONE-TO-ONE BASIS FOR TIEDOWNS.
4. STEEL STRAPPING USED AS TIEDOWNS SHALL BE 2 X .050 AND SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
5. CHAINS, FITTINGS AND LOAD BINDERS SHALL CONFORM TO AND BE APPLIED AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY) EXCEPT THAT THE CHAIN/GRAB HOOKS SHALL BE ATTACHED TO THE STAKE POCKETS (NOT AROUND THE RUB RAIL).
6. PROTECTOR BOARDS (DOUBLED 2 X 6'S) SHALL BE USED UNDER THE TIEDOWNS WHEN USING STEEL STRAPPING. THE STRAPS SHALL BE STAPLED TO THE PROTECTOR BOARD USING 2-INCH STRAPPING STAPLES. WHEN USING CHAIN, THE CHAINS SHALL BE SECURED TO THE PROTECTOR BOARD BY DRIVING A 10d NAIL THROUGH THE CHAIN LINK AND CLINCHING THE NAIL OVER THE CHAIN. FIVE STAPLES/NAILS SHALL BE USED FOR EACH TIEDOWN.
7. PRIOR TO LOADING THE TRAILER AND DURING PRELOADING INSPECTION REQUIRED BY NAVSEA OP 2165 AND REPORTED ON DD FORM 626, THE CHAINS, FITTINGS AND LOAD BINDERS SHALL BE INSPECTED FOR STRETCH, GOUGING, BENT LINKS, WEAR AND ANY OTHER NOTICEABLE DEFECTS. THE INSPECTOR SHALL CONFIRM THAT THE CHAINS, FITTINGS AND LOAD BINDERS HAVE BEEN INSPECTED AND SHALL SO NOTE IN ITEM NO. 22 OF DD FORM 626. ANY DEFICIENCY SHALL BE CAUSE FOR REJECTION OF A CHAIN OR LOAD BINDER.
8. UNLESS OTHERWISE SPECIFIED DUNNAGE LUMBER, STEEL STRAPPING, STRAP SEALS AND NAILS SHALL BE AS SPECIFIED IN THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).
9. THE MAXIMUM GROSS WEIGHT OF THE TRACTOR-TRAILER AND THE ALLOWABLE AXLE WEIGHTS ARE THE RESPONSIBILITY OF THE CARRIER. THE CARRIER WILL ADVISE THE SHIPPER OF THESE LIMITATIONS AND THE SHIPPER SHALL LOAD THE TRAILER IN SUCH A MANNER THAT THE TRACTOR-TRAILER WILL NOT EXCEED THESE LIMITATIONS.
10. AFTER THE BLOCKING, BRACING AND TIEDOWNS HAVE BEEN INSPECTED, THE CONTAINERS SHALL BE COMPLETELY COVERED WITH FIRE RESISTANT WATERPROOF TARPAULINS. THE TARPAULINS MAY BE UNDER THE TIEDOWNS.
11. AFTER THE TARPAULINS ARE IN PLACE, ATTACH "EXPLOSIVES A" PLACARDS TO BOTH SIDES, FRONT AND BACK OF THE TRAILER AND ATTACH THE SHIPPING DOCUMENTS TO AN ACCESSIBLE AREA ON THE BACK DECK OF THE TRAILER.
12. FOR GENERAL TRUCKLOADING PROCEDURES REFER TO THE GENERAL TRUCKLOADING DOCUMENT, MIL-STD-1320 (NAVY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

FTL 45 FT FLATBED (MIN 102 IN. WIDE TRAILER)

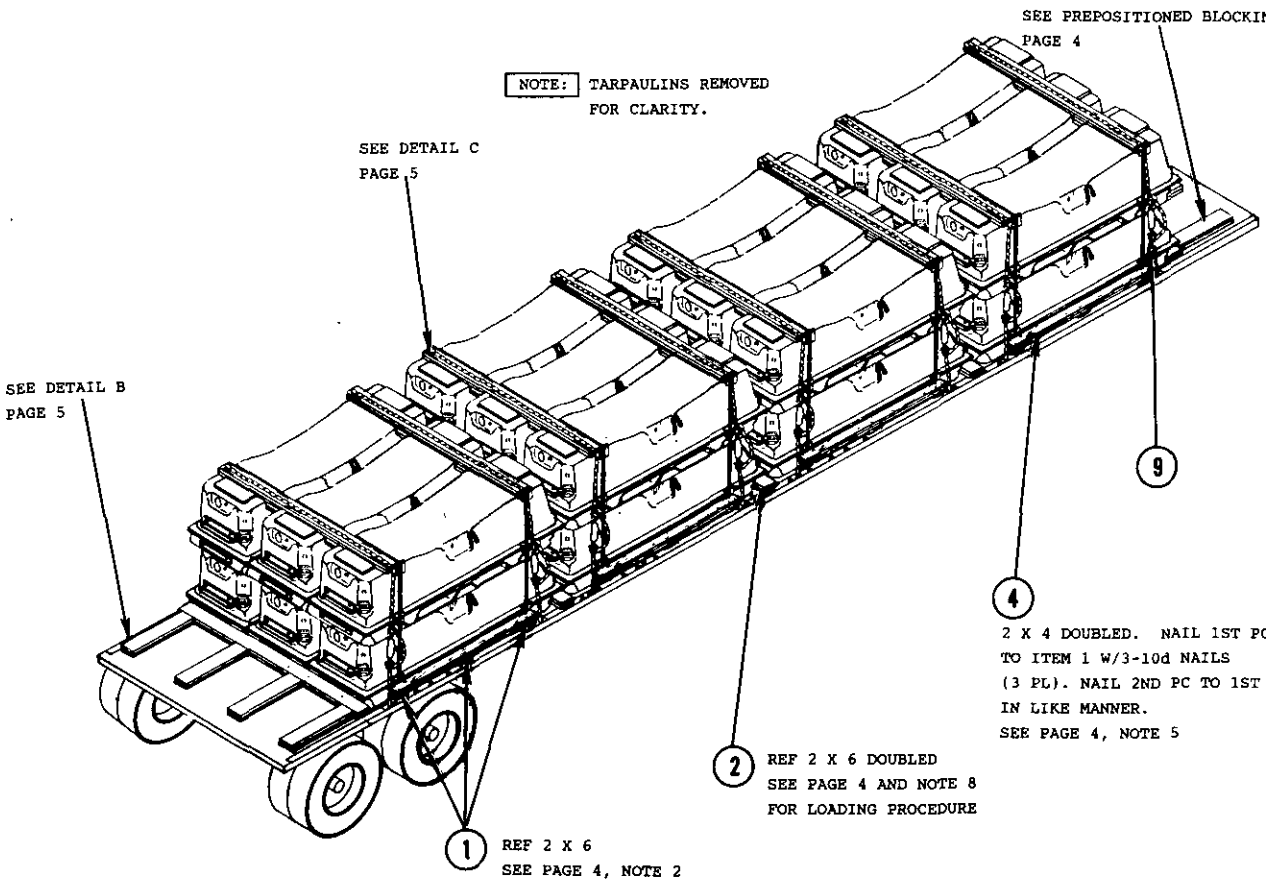


REFER TO PAGE 4 FOR PRELIMINARY LOADING PROCEDURES.


REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
LIST OF MATERIALS				
8	9	CHAIN AND LOAD BINDER		3/8 OR 5/16
16	8	PROTECTOR BOARD	DETAIL C	2 X 6 X 95
32	7	SEPARATOR BOARD	DETAIL C	2 X 6 X 6
4	6	CROSS MEMBER	DETAIL B	2 X 6 X 96
16	5	BACKUP CLEAT	DETAIL B	2 X 6 X 36
16	4	SLEEPER		2 X 4 X 96
16	3	SEPARATOR	VIEW A	2 X 6 X 96
6	2	CROSS MEMBER		2 X 6 X 96
12	1	NAILER	VIEW A	2 X 6 X 100

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

LOADING PROCEDURES AND PREPOSITIONED BLOCKING


1. BUTT 1ST UNIT LOAD FLUSH WITH PREPOSITIONED BLOCKING, DETAIL B (SEE VIEW A) AND 4 1/2 FROM OUTSIDE EDGE OF TRAILER FLOOR.
2. PLACE ONE (1) EACH OF NAILER (ITEM 1) THROUGH THE THREE (3) SLOT OPENINGS IN THE BOTTOM OF THE CONTAINER MAKING SURE THAT AT LEAST 3 1/2 INCHES STICKS OUT BEYOND THE CONTAINER BUT NOT BEYOND THE TRAILER EDGE.
3. NAIL THE THREE (3) NAILERS (ITEM 1) TO THE TRAILER FLOOR W/7-10d NAILS, STARTING FROM INSIDE EDGE OF CONTAINER TO SIDE EDGE OF TRAILER.
4. ALIGN ONE (1) SEPARATOR (ITEM 3) FLUSH AGAINST INNER CONTAINER SIDE AND ON TOP OF NAILER (ITEM 1). *NAIL ITEM 3 TO ITEM 1 W/3-16d NAILS PER JOINT. NAIL 2ND PC TO 1ST PC IN LIKE MANNER.*
5. AFTER 1ST STACK OF CONTAINERS ARE IN PLACE NAIL SLEEPERS (ITEM 4) TO NAILERS (ITEM 1) AS DEPICTED ON PAGE 3.
6. BUTT 2ND UNIT LOAD AGAINST SEPARATOR AND PREPOSITIONED BLOCKING. NAIL 2ND SEPARATOR (ITEM 3) TO NAILER (ITEM 4) W/3-16d NAILS PER JOINT.
7. BUTT 3RD UNIT LOAD IN PLACE AND NAIL SLEEPER (ITEM 4) AS DEPICTED ON PAGE 3.
8. AFTER THE FIRST THREE (3) UNIT LOADS ARE SECURED IN PLACE, NAIL CROSS MEMBERS (ITEM 2) FLUSH AGAINST CONTAINERS W/16d NAILS EVERY 6-8 INCHES. NAIL 2ND PC TO 1ST PC IN LIKE MANNER.
9. CONTINUE THE SAME PROCEDURES FOR THREE (3) MORE STACKS OF CONTAINERS BLOCKING THE LAST STACK WITH DETAIL B, PAGE 5.

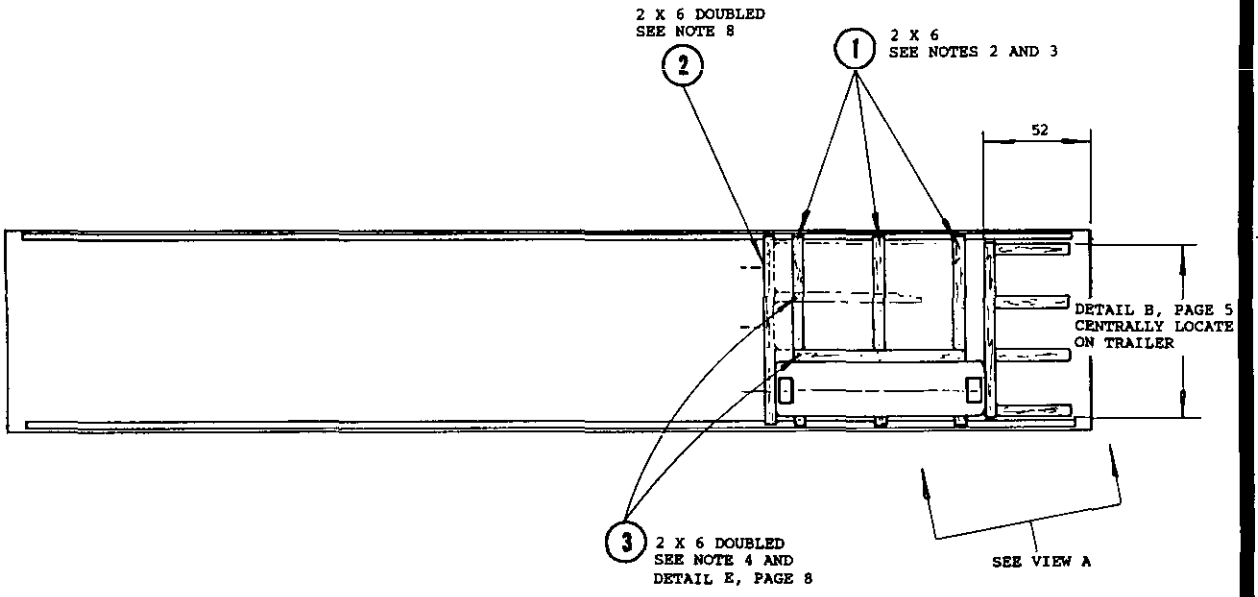

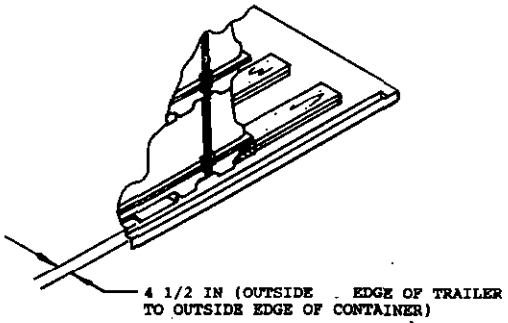

VIEW A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

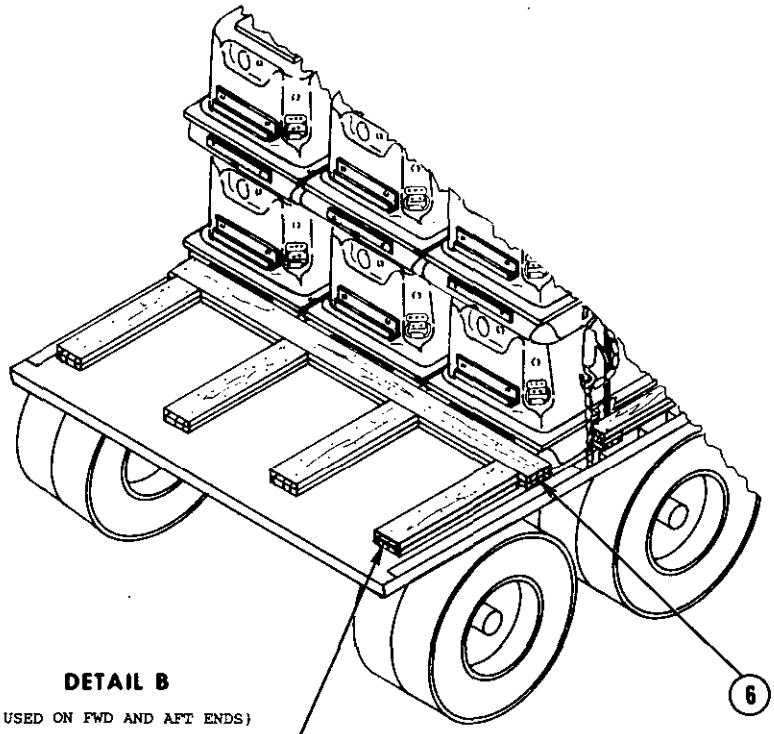


DETAIL B

(USED ON FWD AND AFT ENDS)

(6) 2 X 6 DOUBLED. NAIL 1ST PC TO TRAILER FLOOR W/16d NAILS EVERY 6-8 INCHES. NAIL 2ND PC TO 1ST PC IN LIKE MANNER.

(5) 2 X 6 DOUBLED. NAIL 1ST PC TO TRAILER FLOOR W/10-16d NAILS. NAIL 2ND PC TO 1ST PC IN LIKE MANNER.

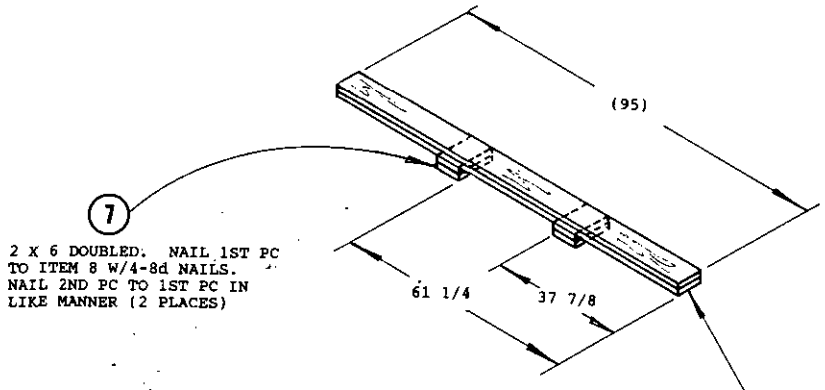

(7) 2 X 6 DOUBLED. NAIL 1ST PC TO ITEM 8 W/4-8d NAILS. NAIL 2ND PC TO 1ST PC IN LIKE MANNER (2 PLACES)

DETAIL C

(8) 2 X 6 DOUBLED. NAIL 1ST PC TO 2ND PC W/8d NAILS EVERY 6-8 INCHES.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T22:49Z
Check the source to verify that this is the current version before use.

LTL 45 FT TRAILERS (FLATBED)
(MIN 102 IN. AND 96 IN. WIDE) SHOWN

1. WHEN REQUIRED TO SHIP LESS-THAN-TRUCKLOAD, SELECT THE CORRECT LOAD PATTERN FOR THE NUMBER OF CONTAINERS TO BE SHIPPED, FROM TABLE I.
2. POSITION CONTAINERS ON THE TRAILER AS SHOWN IN TABLE I, BLOCK AND TIEDOWN USING THE PRINCIPLES SHOWN ON PAGES 3, 7 AND 8 AND THE GENERAL DOCUMENT MIL-STD-1320 (NAVY).
3. THE LTL PLAN ON PAGE 7 SHOWS THE LESS-THAN-TRUCKLOAD METHODS FOR STACKS OF TWO CONTAINERS HIGH AND THE BLOCKING AND BRACING METHODS.

TABLE I


NO. OF CNTRS	LOAD PATTERN (1) STACK = 2 CNTRS
24	
22	
20	
18	
16	
14	
12	
10	
8	
* 6	
* 4	
2	

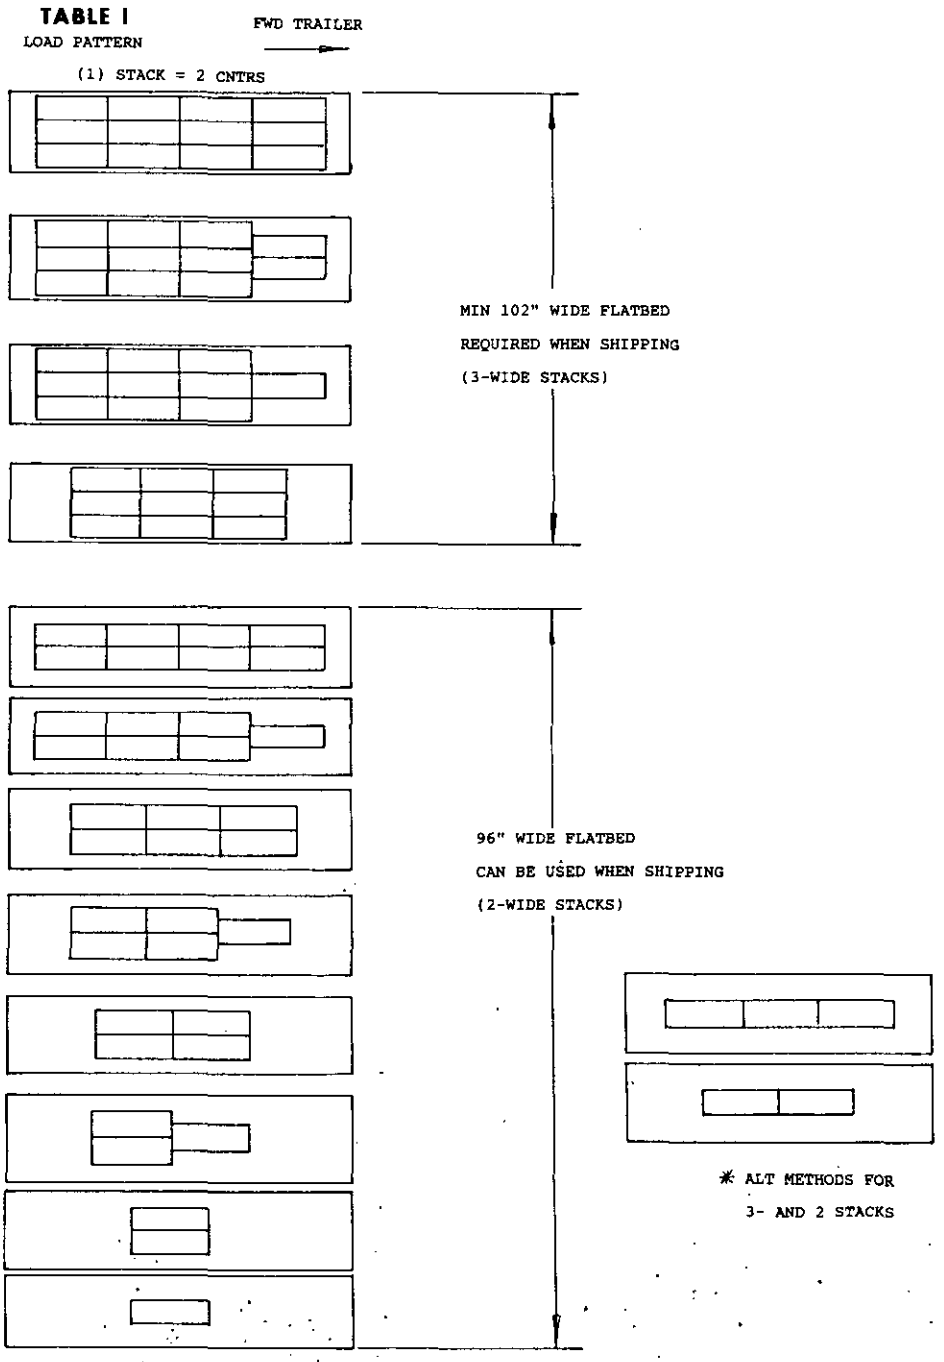

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.


LTL 45 FT FLATBED

NOTE: MIN 102 IN WIDE TRAILER REQUIRED
FOR SHIPPING CONTAINERS (3-WIDE)

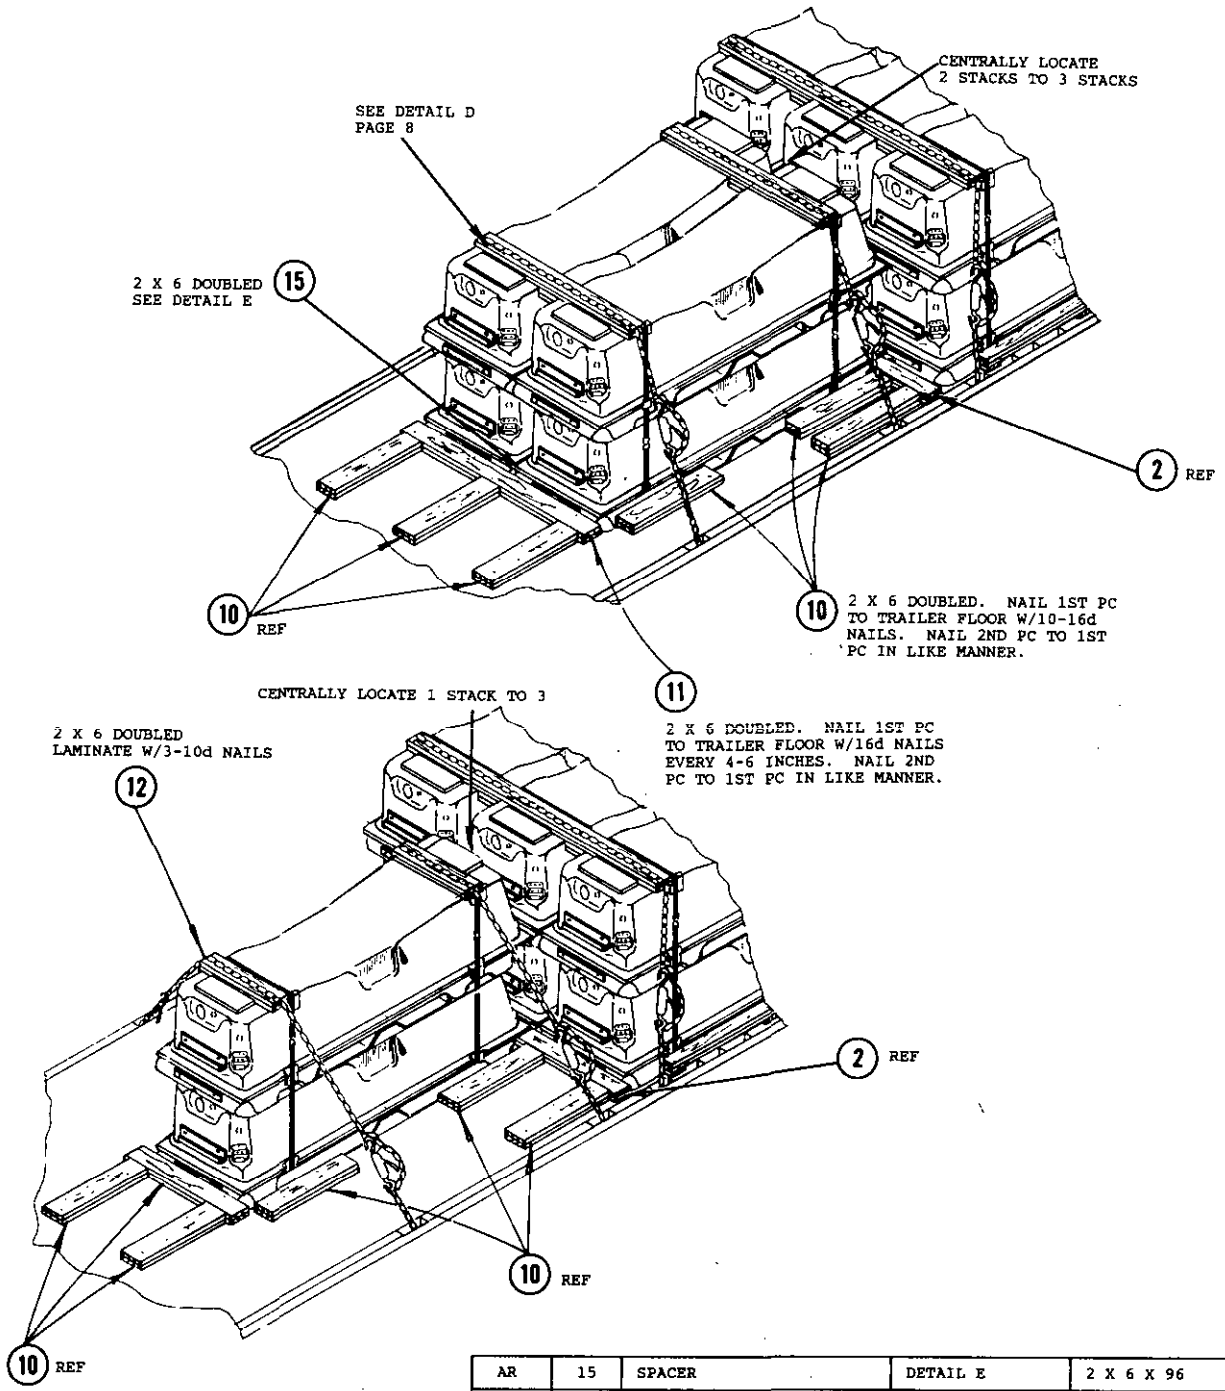


REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
LIST OF MATERIALS				
AR	15	SPACER	DETAIL E	2 X 6 X 96
AR	14	SEPARATOR BOARD	DETAIL D	2 X 6 X 6
AR	13	PROTECTOR BOARD	DETAIL D	2 X 6 X 62
AR	12	PROTECTOR BOARD		2 X 6 X 30
AR	11	CROSS MEMBER		2 X 6 X 62
AR	10	SLEEPER OR BACKUP CLEAT		2 X 6 X 36

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:49Z
Check the source to verify that this is the current version before use.

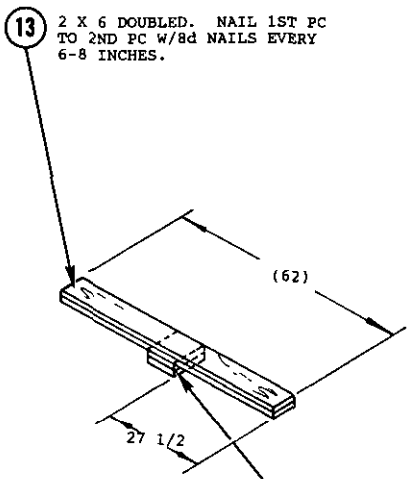

DETAIL D

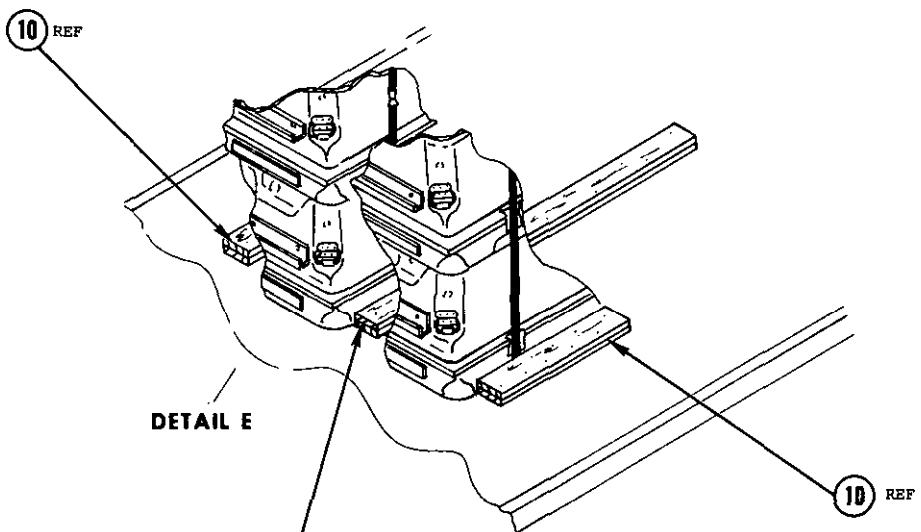

DETAIL E

NOTE:

DETAIL E SHOWS A TWO WIDE STACK USING SPACERBOARD ITEM 15 IN ONE PLACE.

Source: https://assist.dla.mil -- Downloaded: 2025-10-28 20:14:22
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1990 - 704-034/30386