MILITARY STANDARD

MIL-STD-[illegible]

(NAVY)

RAIL 1976

SUPERSEDING
MR-52 [illegible]
8 FEBRUARY 197[illegible]

RAILCAR LOADING OF HAZARDOUS MATERIALS

DISPENSER AND BOMB, AIRCRAFT CBU-59/B COMPLETE (APAM) OR DISPENSER AND BOMB, AIRCRAFT CBU-59(T-1)/B TRAINING IN CONTAINER MK 427 MOD 0 FLEET ISSUE UNIT LOAD


UNIT LOAD DATA

UNIT LOAD DRAWING	MR-54 21[illegible]
WEIGHT	2300 LBS
DIMENSIONS	10? 17 ?32 L X 46 5/16 W X 25 ?1 32 H
STACKING HEIGH	25 17 32
CUBE	7 4[illegible] FT

DOT HAZARD CLASSIFICATION

CBU - 59/B EXPLOSIVE A

CBU - 9[illegible] /B [illegible]OSIVE C

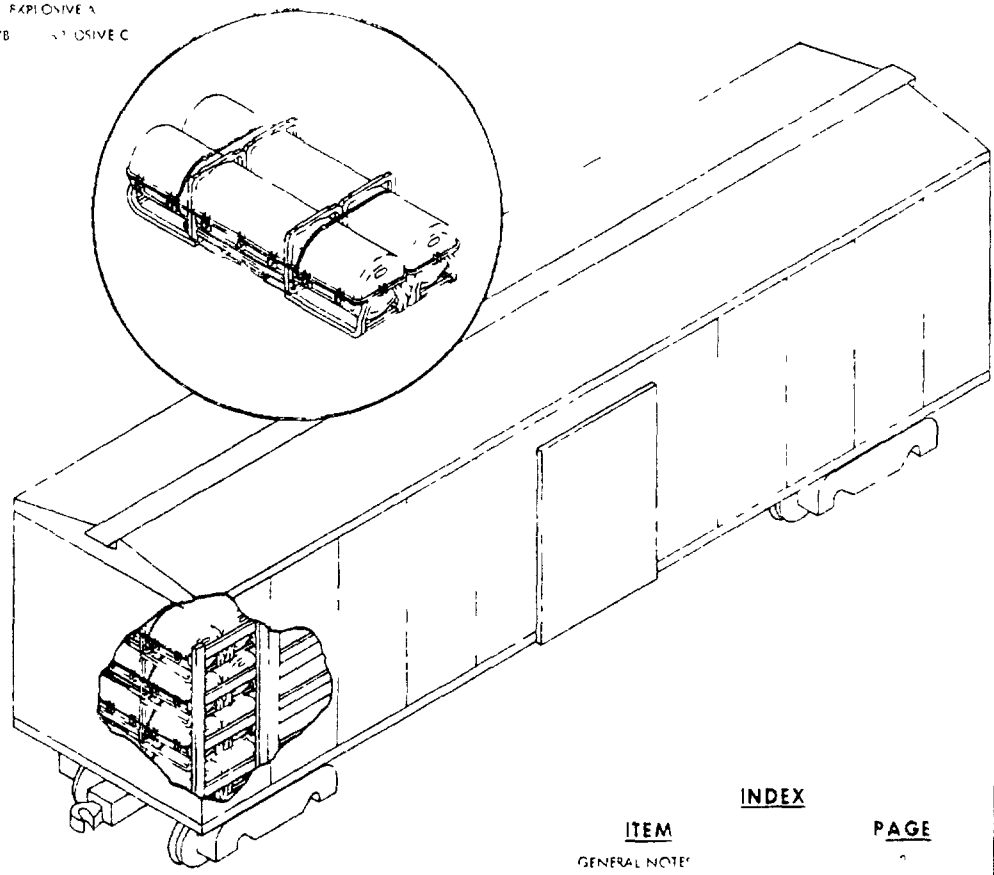

INDEX

ITEM	PAGE
GENERAL NOTES	[illegible]
BODY CARLOAD	[illegible] &
50 6 CARLOAD COM	4 5 & 6

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS-REFERENCE TO ASSOCIATED PALLETIZING TRUCK-LOADING AND CONTAINERLOADING MILITARY STANDARDS REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY)

FSC 8150

AUTHORIZED AND RELEASED FOR GENERAL USE

M.S. Gray NWHL 3/31/76
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

[illegible] Valle 4/6/76
SIGNATURE FOR SYSCOM BY DIRECTION DATE

APPROVED BY BUREAU OF EXPLOSIVES

A. F. Grassmuck 3/18/76
SIGNATURE SUPERVISOR MILITARY AND INTERMODAL SERVICES DATE

ORIGINATOR Charles McBride 3/30/76
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
WPNSTA EARLE, NEW JERSEY


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:02Z
Check the source to verify that this is the current version before use.

GENERAL NOTES


1. FOR GENERAL INFORMATION CONCERNING ORDERING INSPECTING AND PREPARING CARS AND FOR DUNNAGING MATERIALS DESIGN AND INSTALLATION OF DUNNAGE SEE THE GENERAL DOCUMENT MIL STD-1325 (NAVY) RAILCAR LOADING OF HAZARDOUS MATERIALS
2. WHEN PLANNING SHIPMENTS ORDER THE MINIMUM NUMBER OF CARS OF THE CAPACITY REQUIRED FOR THE SHIPMENT DODX UTILITY LOADER CAR S SHALL NOT BE USED FOR ITEMS WITH EXPLOSIVES A OR B HAZARD CLASSIFICATION
3. LOADING PLANS SHOWN ARE FOR DODX UTILITY LOADER CAR WITH 50 FT 6 IN INSIDE LENGTH 107 3/4 IN INSIDE WIDTH BETWEEN RAILS (111 IN INSIDE WIDTH BETWEEN SIDE WALLS) AND COMMERCIAL BOXCARS WITH 50 FT 6 IN INSIDE LENGTH 110 IN INSIDE WIDTH
4. THE LOAD LIMIT OF A CAR MUST NOT BE EXCEEDED NOR SHOULD THE RAILCAR BE LOADED SO THAT MORE THAN ONE-HALF OF THE LOAD LIMIT IS CARRIED BY ONE SET OF TRUCKS
5. IF END WALLS OF CARS ARE NOT SQUARE THEY MUST BE SQUARED OFF BEFORE STARTING TO LOAD CAR
6. THE LOAD CONSISTS OF AIRCRAFT DISPENSER AND BOMB CBU-59/B COMPLETE (APAM) OR AIRCRAFT DISPENSER AND BOMB CBU 59(T-1)/B TRAINING IN CONTAINER MK 427 MOD 0 THE CONTAINERS ARE UNITIZED TWO TO A UNIT LOAD AS SHOWN IN WR-54/215
7. THE UNIT LOADS ARE HANDLED AND LOADED WITH A SUITABLE FORK LIFT TRUCK
8. UNLESS OTHERWISE SPECIFIED NAILING SHALL BE IN ACCORDANCE WITH MIL-STD-1325 (NAVY)
9. APPLICABLE MATERIAL SPECIFICATIONS
   - DUNNAGE LUMBER - FED SPEC MM- -751
   - NAILS - FED SPEC FF-N-105
   - STRAPPING - FED SPEC QQ-S-781 TYPE I HEAVY DUTY CLASS A
   - SEALS FED SPEC QQ S-781 STYLE III HEAVY DUTY
10. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CAR IN AN ACCESSIBLE AREA CLOSE AND SEAL BOXCAR DOORS AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF CAR AS PRESCRIBED IN OP 2165 (VOL 1)

50 FT 6 IN BOXCAR, DODX

1. THE CARLOAD CONSISTS OF 44 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING
2. A DETAILED DESCRIPTION AND OPERATING INSTRUCTIONS FOR THE UTILITY LOADER ARE CONTAINED IN OP 1750
3. TO PREVENT UNUSED DF EQUIPMENT FROM BECOMING DISLODGED DURING TRANSIT OF DODX CARS SECURE IT AT ANY LOCATION IN THE BOXCAR WHICH WILL NOT INTERFERE WITH UNLOADING
4. WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN DODX BOXCARS THE SAME PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE ANY BAYS OR PORTION THEREOF MAY BE USED PROVIDING THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAP ARE COMPLIED WITH (SEE MIL-STD-1325 (NAVY) EACH CROSSMEMBER WILL BE USED IN SUCH A MANNER THAT IT WILL RETAIN NOT MORE THAN 2400 LBS OF THE LADING

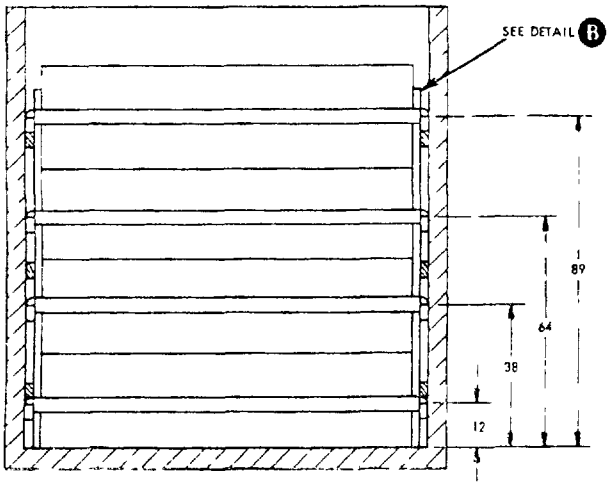


SECTION A-A
SHOWING LOCATIONS OF WALL MEMBERS
USED FOR CROSSMEMBERS

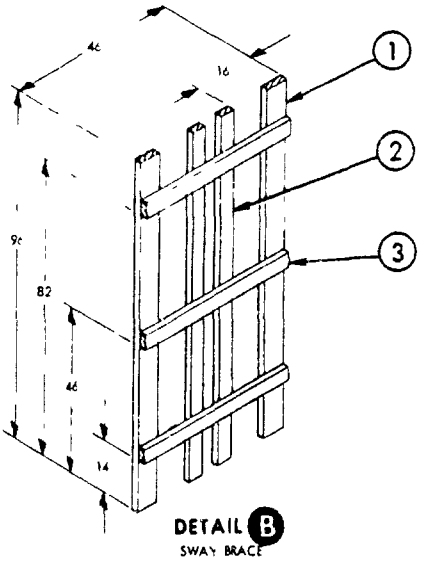


DETAIL B
SWAY BRACE
22 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:02Z
Check the source to verify that this is the current version before use.

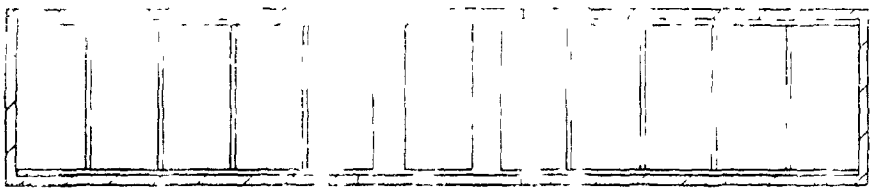

LOADING PLAN

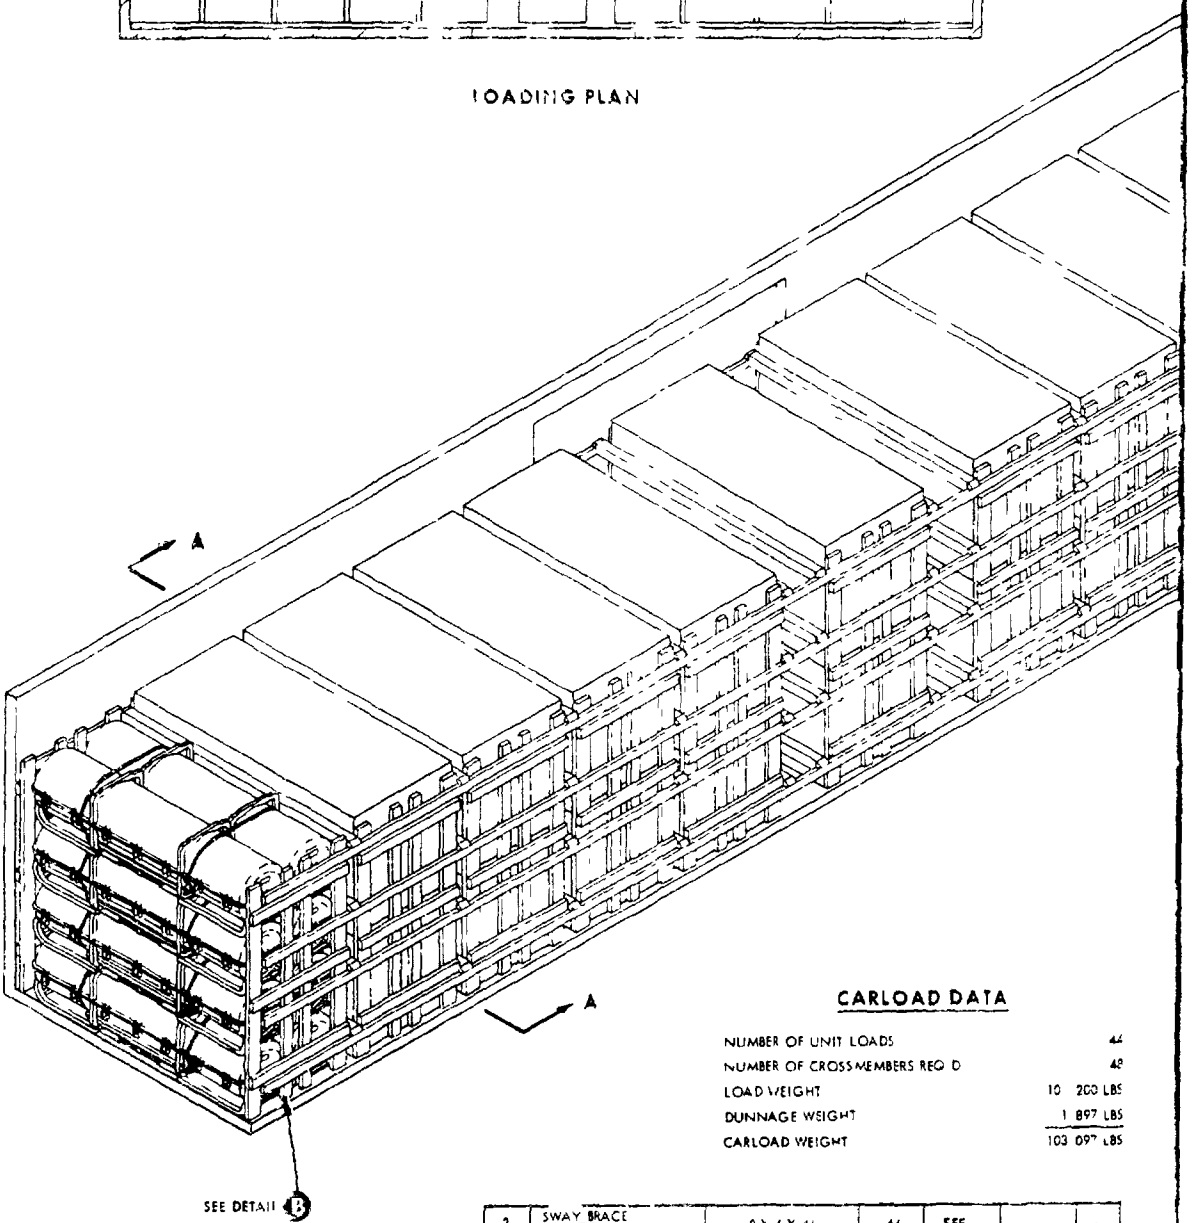

CARLOAD DATA

NUMBER OF UNIT LOADS	44
NUMBER OF CROSSMEMBERS REQ D	48
LOAD WEIGHT	10 200 LBS
DUNNAGE WEIGHT	1 897 LBS
CARLOAD WEIGHT	103 097 LBS


PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ D	NAIL TO	NAILS NUMBER	NAILS SIZE
3	SWAY BRACE HORIZONTA	2 X 4 X 46	66	SEE	-	-
2	SWAY BRACE VERTICAL	2 X 4 X 96	44	3	3 PER JOINT	10d
1	SWAY BRACE VERTICAL	2 X 6 X 96	44	3	3 PER JOINT	10d

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:02Z
Check the source to verify that this is the current version before use.

50 FT 6 IN BOXCAR, COMMERCIAL

1. THE CARLOAD CONSIST OF 48 UNIT LOADS WHICH MUST BE LOADED AND DUPLICATED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING.
2. WHEN LESS THAN CARLOAD LCL QUANTITIES ARE LOADED TO BE SHIPPED IN COMMERCIAL BOXCARS AND A PARTIAL LAYER RESULTS THE PARTIAL LAYER OF LADING SHALL BE BRACED BY MEANS OF END BRACING AND/OR PARTIAL LAYER BRACING CONSTRUCTED IN ACCORDANCE WITH MIL-STD-1325-100 (NAVY) OR PARTIAL UPPER LAYER BRACING IN ACCORDANCE WITH MIL-STD-1325-102 (NAVY) SELECT THE TYPE OF BRACE TO COMPLY WITH THE WEIGHT OF THE UNITS TO BE RETAINED. THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR MUST BE COMPLIED WITH. SEE MIL-STD-1325 (NAVY).
3. THE LOADS AS SHOWN ARE BASED ON CARS WHICH HAVE 10 FT WIDE DOORWAY OPENINGS AND ARE EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE TO BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS OTHER THAN 10 FT WIDE.
4. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE ALSO APPLICABLE TO BOXCARS EQUIPPED WITH PLUG TYPE DOORS. STACKS WITH MORE THAN HALF OF THE UNIT LOAD IN THE DOORWAY AREA MUST HAVE THE SWAY BRACE EACH SIDE OF THE STACK SECURED TO THE STACK WITH TWO LATERALLY APPLIED 1 1/4 IN. STEEL STRAPS PER STACK. EACH TENSIONED AND SEALED WITH TWO DOUBLE CRIMPED SEALS. IF THE CAR FLOOR IS NOT A NAILABLE FLOOR DOORWAY PROTECTION AS PER MIL-STD-1325 (NAVY) IS REQUIRED. CLOSE DOORS SECURELY AND WIRE TOGETHER WITH A FLEXIBLE, STRONG STEEL WIRE INSERTED THROUGH THE HOLES IN THE DOOR LATCH ASSEMBLY ONE OR MORE TIMES AND THE WIRE ENDS TWISTED TOGETHER.
5. WHEN BOXCARS WIDER THAN 9 FT 2 IN ARE USED INCREASE THE THICKNESS OF PIECE 1 BY LAMINATING AN APPROPRIATELY THICK PIECE TO IT. IF THE WIDTH OF BOXCARS USED IS LESS THAN 9 FT 2 IN DECREASE THE THICKNESS OF PIECE 1 AS NECESSARY.

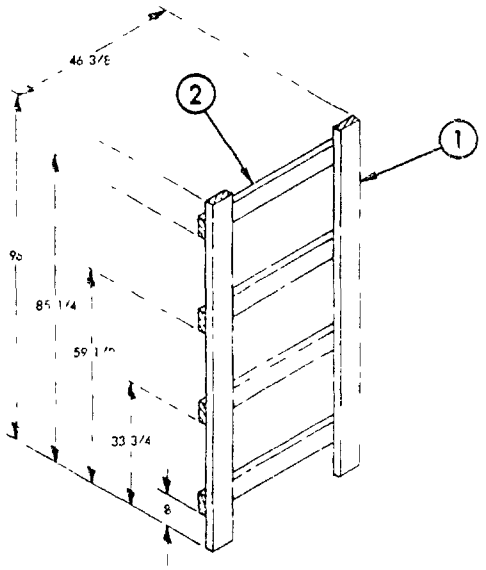

DETAIL A
SWAY BRACE
20 REQUIRED


* 2 X 6 STRUTS DOUBLED AND LAMINATED WITH 10d NAILS MAY BE SUBSTITUTED IN PLACE OF 4 X 4 s.

** WHEN BOXCAR HAS A NON-NAILABLE FLOOR DOORWAY PROTECTION AS PER MIL STD 1325 (NAVY) IS REQUIRED


PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
14	CENTER GATE HOLD DOWN	2 X 3	2	11	2 PER JOINT	10d
13	STRUT	4 X 4 X WEDGE FIT*	20	11	2 PER JOINT	16d
12	CENTER GATE STRUT CLEAT	2 X 4 X CAR WIDTH - 1	8	11	3 PER JOINT	10d
11	CENTER GATE VERTICAL	2 X 6 X 10" 1/2	10	SEE 10		-
10	CENTER GATE HORIZONTAL	2 X 6 X CAR WIDTH - 1	8	11	3 PER JOINT	10d
9	SEAL	1 1/4	26	-	-	-
8	LATERAL STRAP	1 1/4 X .035 X 21 FT	2	-	-	-
7	VERTICAL STRAP	1 1/4 X .035 X 11 FT	12	-	-	-
6	SLEEPER	2 X 6 X 96	2	5	1 PER FOOT	16d
5	SLEEPER	2 X 6 X 96	2	CAR** FLOOR	1 PER FOOT	16d
4	SEPARATOR GATE HORIZONTAL	2 X 6 X CAR WIDTH - 1	4	SEE 3	-	-
3	SEPARATOR GATE VERTICAL	2 X 6 X 102 1/2	10	4	3 PER JOINT	10d
2	SWAY BRACE HORIZONTAL	2 X 6 X 46 3/8	80	1	3 PER JOINT	10d
	SWAY BRACE VERTICAL	2 X 6 X 96	40	SEE 2	-	-

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:02Z
Check the source to verify that this is the current version before use.

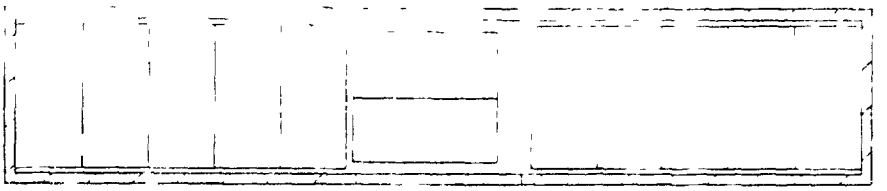


LOADING PLAN

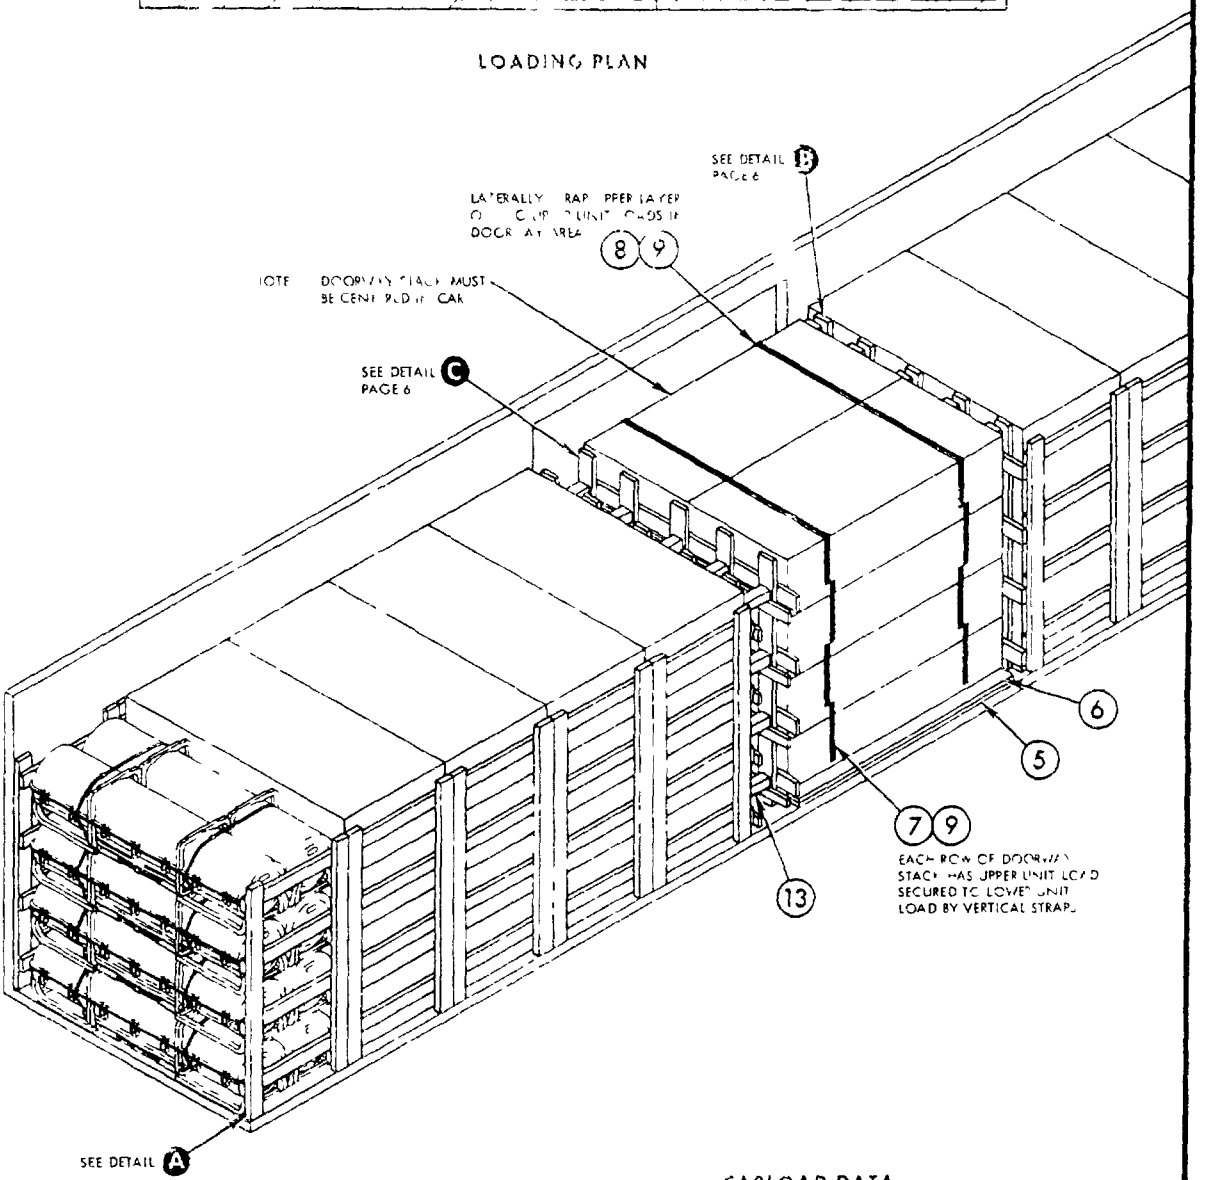


CARLOAD DATA

NUMBER OF UNIT LOADS	48
LOAD WEIGHT APPROXIMATE	110 400 LBS
DUNNAGE WEIGHT APPROXIMATE	2 654 LBS
CARLOAD WEIGHT APPROXIMATE	113 045 LBS

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:02Z
Check the source to verify that this is the current version before use.

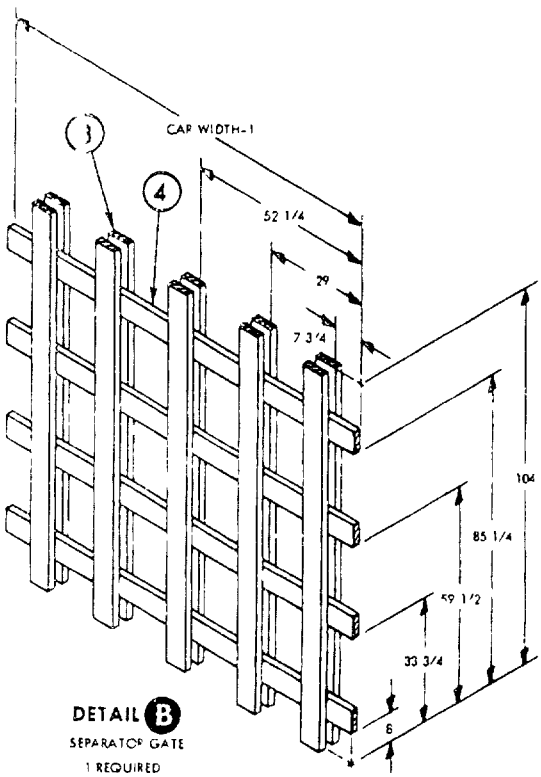

DETAIL B
SEPARATOR GATE
1 REQUIRED

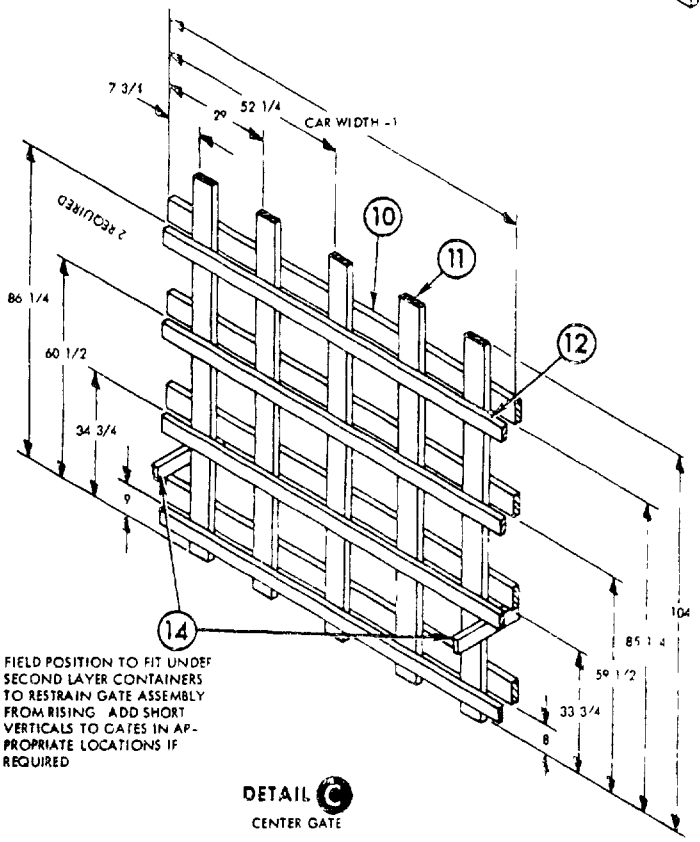

FIELD POSITION TO FIT UNDER SECOND LAYER CONTAINERS TO RESTRAIN GATE ASSEMBLY FROM RISING ADD SHORT VERTICALS TO GATES IN APPROPRIATE LOCATIONS IF REQUIRED

DETAIL C
CENTER GATE
2 REQUIRED

REVIEW ACTIVITY
NAVY - OS AS

PREPARING ACTIVITY
NAVY - OS
PROJECT NO 8140-N316

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve prompt delivery of suitable products at reasonable cost and minimum delay, or will otherwise enhance the use of the document. DoD contractors, government activities or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-STD-1325-144 (Navy)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 JAN 72 PREVIOUS EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:02Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MA

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDING OFFICER
NAVAL WEAPONS STATION EARLE
NAVAL WEAPONS HANDLING LABORATORY
COLTS NECK, NJ 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:02Z
Check the source to verify that this is the current version before use.