MILITARY STANDARD


MIL-STD-1325-186
(NAVY)

RAILCAR LOADING OF HAZARDOUS MATERIALS
MINE, UNDERWATER MK 60 MOD 0
IN SKID MK 24 MOD 0

20 SEPTEMBER 1977

LOADED SKID

WEIGHT	SEE TABLE I
DIMENSIONS	159 L X 30 W X 36 3/4 H STACKING HEIGHT 33 3/4
CUBE	101.4 CU FT
DOT HAZARD CLASSIFICATION	SEE TABLE I

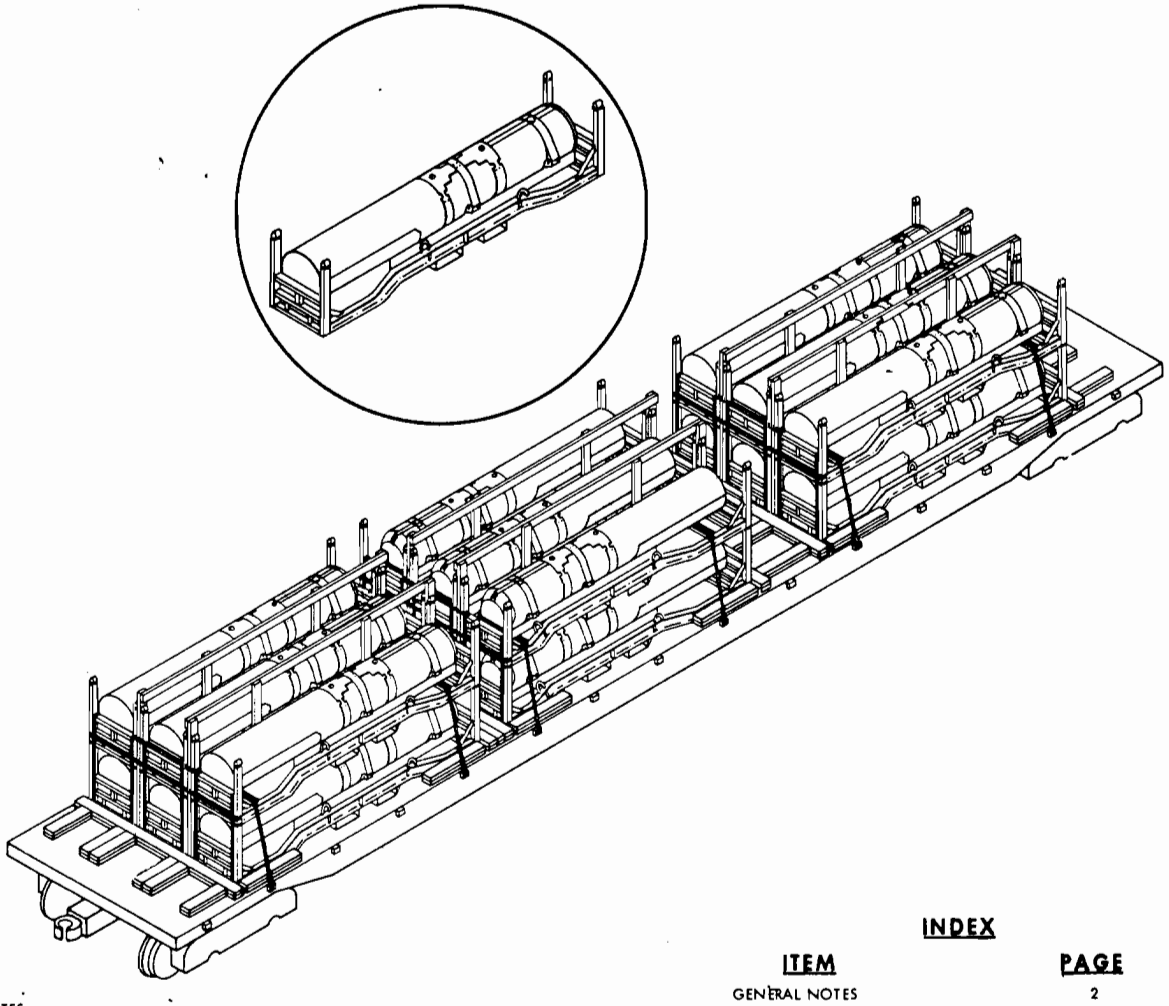

NOTES:

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CONTAINERLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK-236 (NAVY).

INDEX

ITEM	PAGE
GENERAL NOTES	2
DODX CARLOAD	2, 3
50' 6" BOXCAR, COM'L	4, 5, 6, 7
53' 0" FLATCAR, COM'L	8, 9, 10, 11, 12

FSC 8140

AUTHORIZED AND RELEASED FOR GENERAL USE.

M.S. Gray NWHC — 10/28/76
TECHNICAL DIRECTION AGENT (TDA) — DATE

J.E. Kelly — 10/28/76
SEASYSCOM BY DIRECTION — DATE

APPROVED BY BUREAU OF EXPLOSIVES

A.F. Grassmuck — 10/8/76
SIGNATURE — SUPERVISOR, MILITARY AND INTERMODEL SERVICES — DATE

ORIGINATOR — 10/28/76 — DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.

GENERAL NOTES


1. FOR GENERAL INFORMATION CONCERNING ORDERING, INSPECTING, AND PREPARING CARS, AND FOR DUNNAGING MATERIALS, DESIGN, AND INSTALLATION OF DUNNAGE SEE THE GENERAL DOCUMENT MIL-STD-1325 (NAVY) "RAILCAR LOADING OF HAZARDOUS MATERIALS".
2. WHEN PLANNING SHIPMENTS ORDER THE MINIMUM NUMBER OF CARS OF THE CAPACITY REQUIRED FOR THE SHIPMENT. UTILITY LOADER CARS SHALL BE SERIES DODX 29000. DODX CARS SHALL ONLY BE USED FOR THE "SHIPPING" CONFIGURATION MINES, AND NOT FOR THE "01" OR "02" CONFIGURATIONS.
3. LOADING PLANS SHOWN ARE FOR DODX UTILITY LOADER CAR WITH 50 FT 6 INCHES INSIDE LENGTH, 107 3/4 INCHES INSIDE WIDTH BETWEEN RAILS (111 INCHES INSIDE WIDTH BETWEEN SIDE WALLS), COMMERCIAL BOXCARS WITH 50 FT 6 INCHES INSIDE LENGTH, 110 INCHES INSIDE WIDTH, WITH DOORWAY OPENINGS NOT LESS THAN 15 FEET WIDE, AND FLATCARS WITH A PLATFORM 53 FEET 0 INCHES LONG AND A MINIMUM OF 9 FEET 0 INCHES WIDE WITH STAKE POCKETS SPACED 42 INCHES ON CENTERS. FLATCARS WITH STEEL FLOOR ENDS AND/OR EXPOSED STEEL BOLSTERS THAT INTERFERE WITH NAILING SHALL NOT BE USED.
4. THE "LOAD LIMIT" OF A CAR MUST NOT BE EXCEEDED NOR SHOULD THE RAILCAR BE LOADED SO THAT MORE THAN ONE-HALF OF THE "LOAD LIMIT" IS CARRIED BY ONE SET OF TRUCKS.
5. IF END WALLS OF CARS ARE NOT SQUARE THEY MUST BE SQUARED OFF BEFORE STARTING TO LOAD CAR.
6. THE LOAD CONSISTS OF MK 60 MOD 0 UNDERWATER MINES IN MK 24 MOD 0 SKIDS.
7. THE SKIDS ARE HANDLED AND LOADED WITH A SUITABLE FORK LIFT TRUCK AND/OR MK 45 MOD 0 HANDLIFT TRUCKS.
8. UNLESS OTHERWISE SPECIFIED NAILING SHALL BE IN ACCORDANCE WITH MIL-STD-1325 (NAVY).
9. ALL STRAP JOINTS SHALL BE CRIMP-TYPE JOINTS MADE WITH A CRIMPING TOOL THAT DOES NOT CUT THE SEAL OR STRAP, RATHER THAN A TOOL THAT MAKES A NOTCH-TYPE JOINT. THE STRAPPING MUST BE IN ACCORDANCE WITH NAVSUP NOTICE 4642 DATED 21 APRIL 1971.
10. APPLICABLE MATERIAL SPECIFICATIONS:
    DUNNAGE LUMBER - FED SPEC MM-L-751
    NAILS - FED SPEC FF-N-105
    STRAPPING - FED SPEC QQ-S-781, TYPE I, HEAVY DUTY, CLASS A, DRY (UNLUBRICATED)
    SEALS - FED SPEC QQ-S-781, STYLE III, HEAVY DUTY
11. AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CAR IN AN ACCESSIBLE AREA, CLOSE AND SEAL BOXCAR DOORS, AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF CAR AS PRESCRIBED IN OP 2165 (VOL I).

50 FT 6 IN. BOXCAR, DODX

1. THE CARLOAD CONSISTS OF 18 "SHIPPING" CONFIGURATION MINES IN SKIDS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING.
2. A DETAILED DESCRIPTION AND OPERATING INSTRUCTIONS FOR THE UTILITY LOADER ARE CONTAINED IN OP 1750.
3. TO PREVENT UNUSED "DF" EQUIPMENT FROM BECOMING DISLODGED DURING TRANSIT OF DODX CARS SECURE IT AT ANY LOCATION IN THE BOXCAR WHICH WILL NOT INTERFERE WITH UNLOADING.
4. WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN DODX BOXCARS THE SAME PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE. ANY BAYS OR PORTION THEREOF MAY BE USED PROVIDING THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR ARE COMPLIED WITH, SEE MIL-STD-1325 (NAVY). EACH CROSSMEMBER WILL BE USED IN SUCH A MANNER THAT IT WILL RETAIN NOT MORE THAN 2500 LBS OF THE LADING.


TABLE I

MINE MK 60 MOD 0 CONFIGURATION	DOT HAZARD CLASSIFICATION	WEIGHT OF MINE AND SKID (APPROX)
"SHIPPING"	INERT	2186 LBS
"01"	EXPLOSIVE A	3016 LBS
"02"	EXPLOSIVE A	2706 LBS

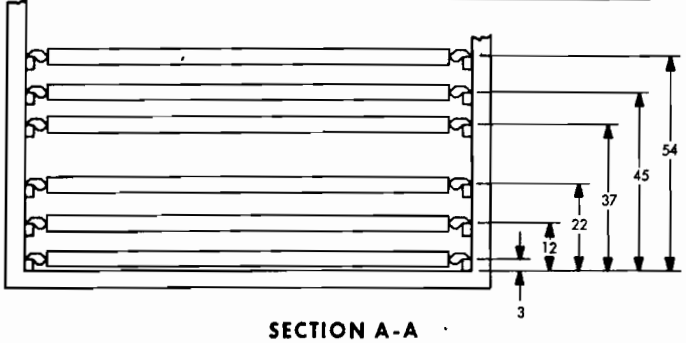

SECTION A-A


SHOWING LOCATION OF WALL MEMBERS.
USED FOR CROSS MEMBERS.
LADING & DUNNAGE OMITTED
FOR CLARITY.

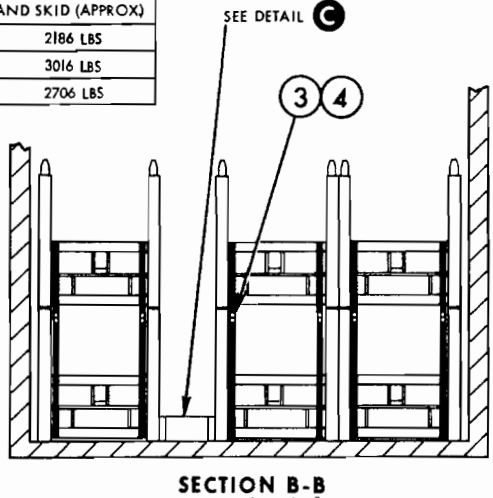

SECTION B-B


SHOWING "SHIPPING" CONFIGURATION UNITIZING
STRAPPING FOR CARLOADING ONLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.

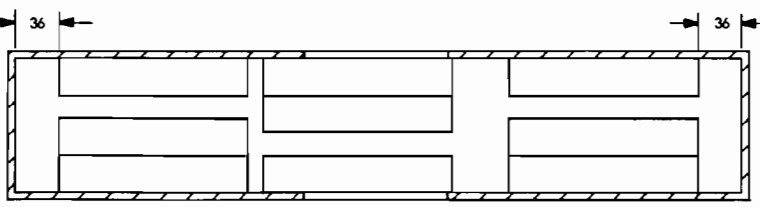


LOADING PLAN

"SHIPPING" CONFIGURATION ONLY

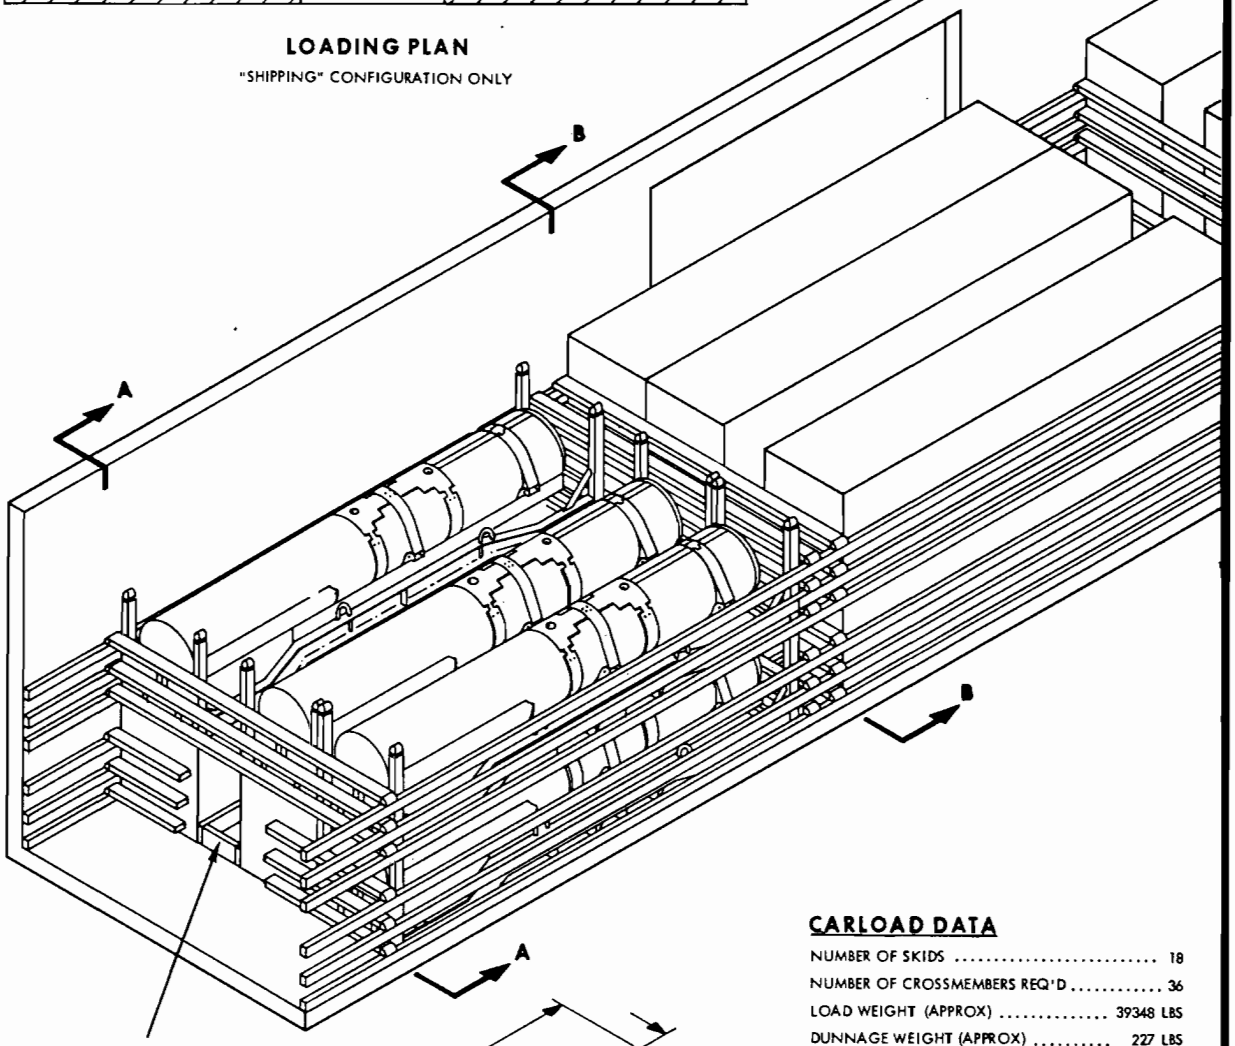

CARLOAD DATA

NUMBER OF SKIDS	18
NUMBER OF CROSSMEMBERS REQ'D	36
LOAD WEIGHT (APPROX)	39348 LBS
DUNNAGE WEIGHT (APPROX)	227 LBS
CARLOAD WEIGHT (APPROX)	39575 LBS

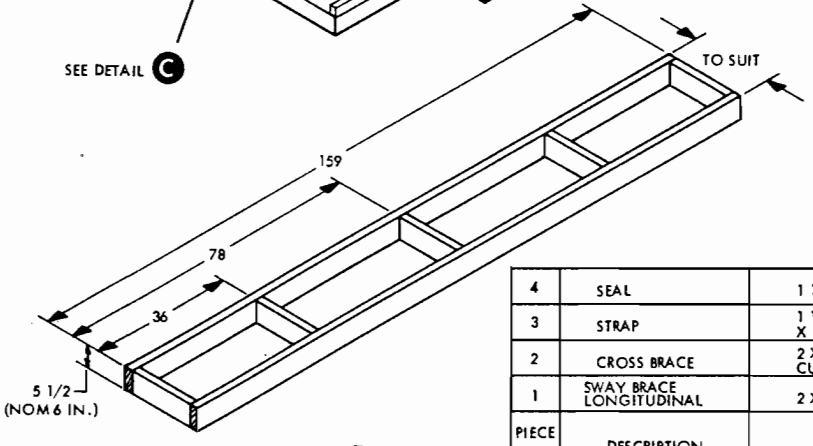

DETAIL C

SWAY BRACE FRAME
3 REQUIRED


PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS: NUMBER	NAILS: SIZE
4	SEAL	1 1/4	72	-	-	-
3	STRAP	1 1/4 X .035 X 10 FT	36	-	-	-
2	CROSS BRACE	2 X 6 X CUT TO FIT	15	SEE 1	-	-
1	SWAY BRACE LONGITUDINAL	2 X 6 X 159	6	2	3 PER JOINT	16d

LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.


50 FT 6 IN. BOXCAR, COMMERCIAL

1. THE CARLOAD CONSISTS OF EITHER 18 "SHIPPING" CONFIGURATION MINES IN SKIDS (2 LAYERS HIGH) OR 9 "01" OR "02" CONFIGURATION MINES IN SKIDS (1 LAYER HIGH) WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING.
2. WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN COMMERCIAL BOXCARS WITH WOOD LINING DUMMY SKIDS (SEE DETAIL F, PAGE 7) MAY BE USED IN PLACE OF THE MISSING LOADED SKIDS AND/OR PARTIAL LAYER BRACING CONSTRUCTED IN ACCORDANCE WITH MIL-STD-1325-100 (NAVY) MAY BE USED. SELECT THE TYPE OF BRACE TO COMPLY WITH THE THE WEIGHT OF THE UNITS TO BE RETAINED. IN ALL STEEL BOXCARS DUMMY SKIDS MAY BE USED IN PLACE OF LOADED SKIDS. THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR MUST BE COMPLIED WITH, SEE MIL-STD-1325 (NAVY).
3. THE LOADS AS SHOWN ARE BASED ON CARS WHICH HAVE 15 FT WIDE DOORWAY OPENINGS AND ARE EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE NOT APPLICABLE TO BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS LESS THAN 15 FT WIDE.
4. THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE ALSO APPLICABLE TO BOXCARS EQUIPPED WITH PLUG DOORS. THE PLUG DOORS MUST BE SPANNED WITH A 2 X 6 X DOORWIDTH + 24 INCH PIECE NAILED TO THE SIDE WALLS (5-10d NAILS EACH END) AT THE FLOOR LEVEL. THE WIDTH AND LENGTH OF THE SWAY BRACES IN THE DOORWAY AREA WILL HAVE TO BE ADJUSTED AS NECESSARY. DUNNAGE MATERIAL MUST NOT BE NAILED TO ANY PLUG DOOR, WHETHER MAIN OR AUXILIARY, EXCEPT WHEN THE CAR HAS A COMBINATION OF A CONVENTIONAL SLIDING TYPE DOOR AND A PLUG TYPE DOOR AND AN ADEQUATE NAILING STRIP IS PROVIDED ON THE PLUG TYPE DOOR. IF LUMBER OF SUFFICIENT LENGTH TO SPAN PLUG DOORS IS NOT AVAILABLE RANDOM LENGTH MATERIAL, DOUBLED AND SPLICED BUT WITH JOINTS OF SPLICES OFFSET, MAY BE USED DIMENSIONAL LUMBER DOORWAY PROTECTION, PIECES 17 AND 18, IS NOT REQUIRED WHEN PLUG DOOR EQUIPPED BOXCARS ARE USED EXCEPT WHEN CAR HAS A COMBINATION OF PLUG DOOR AND CONVENTIONAL SLIDING DOOR. THEN DIMENSIONAL LUMBER DOORWAY PROTECTION IS REQUIRED FOR THE CONVENTIONAL DOOR. PLUG DOORS MUST BE SECURELY CLOSED AND WIRED TOGETHER WITH A STRONG FLEXIBLE STEEL WIRE INSERTED THROUGH THE HOLES IN THE DOOR LATCH ASSEMBLY ONE OR MORE TIMES AND THE WIRE ENDS TWISTED TOGETHER.

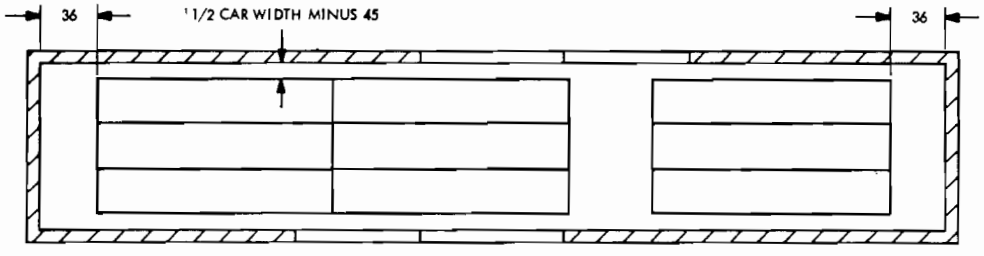


LOADING PLAN

"01" AND "02" CONFIGURATIONS - 1 LAYER HIGH
"SHIPPING" CONFIGURATION - 2 LAYERS HIGH

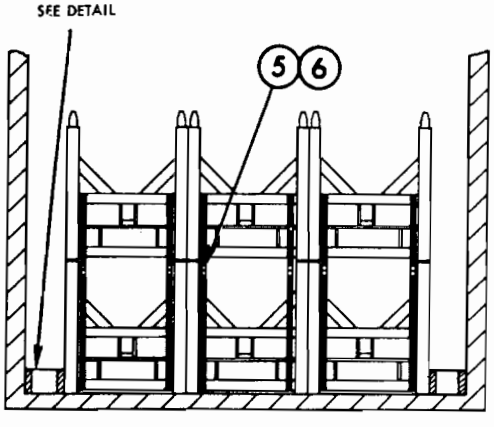

SECTION A-A

SHOWING "SHIPPING" CONFIGURATION UNITIZING STRAPPING FOR CARLODING ONLY

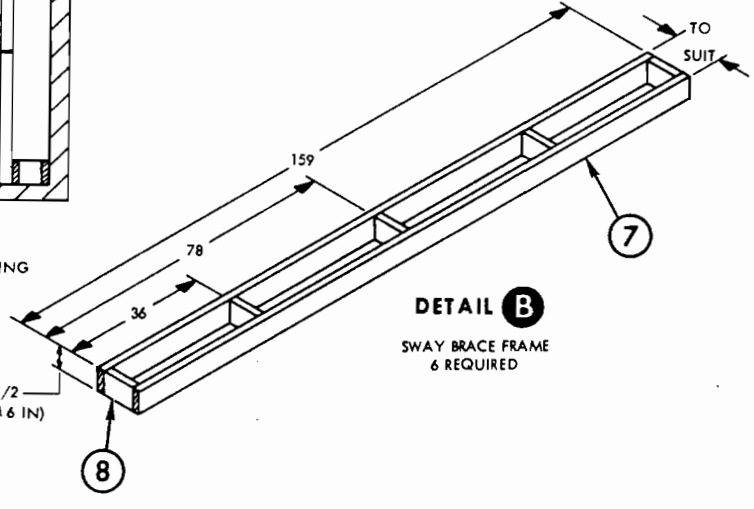


DETAIL B

SWAY BRACE FRAME
6 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.

CARLOAD DATA

MINE MK 60 MOD 0 CONFIGURATION	NUMBER OF SKIDS	LOAD WEIGHT (APPROX)	DUNNAGE WEIGHT (APPROX)	CARLOAD WEIGHT (APPROX)
"SHIPPING"	18	39348 LBS	2186 LBS	41534 LBS
"01"	9	27144 LBS	1294 LBS	28438 LBS
"02"	9	24354 LBS	1294 LBS	25648 LBS

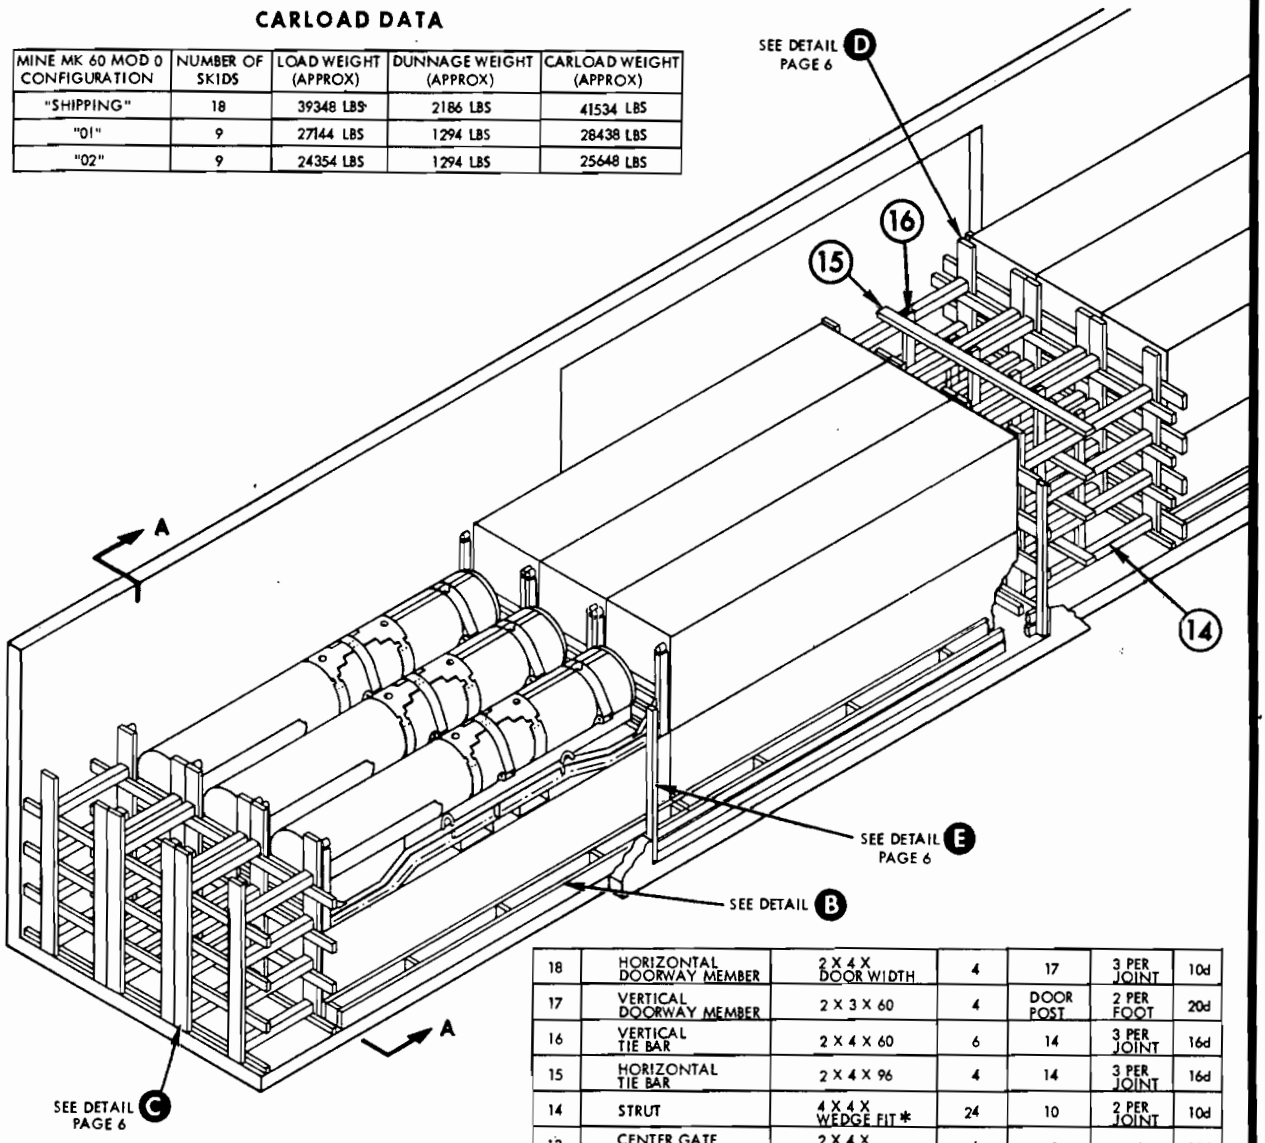


PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NAILS NUMBER	NAILS SIZE
18	HORIZONTAL DOORWAY MEMBER	2 X 4 X DOOR WIDTH	4	17	3 PER JOINT	10d
17	VERTICAL DOORWAY MEMBER	2 X 3 X 60	4	DOOR POST	2 PER FOOT	20d
16	VERTICAL TIE BAR	2 X 4 X 60	6	14	3 PER JOINT	16d
15	HORIZONTAL TIE BAR	2 X 4 X 96	4	14	3 PER JOINT	16d
14	STRUT	4 X 4 X WEDGE FIT *	24	10	2 PER JOINT	10d
13	CENTER GATE HOLDDOWN	2 X 4 X CUT TO FIT	6	9	4	10d
12	CENTER GATE STRUT CLEAT	2 X 2 X CAR WIDTH-1	2	10	2 PER JOINT	10d
11	CENTER GATE STRUT CLEAT	2 X 4 X CAR WIDTH-1	6	10	3 PER JOINT	10d
10	CENTER GATE VERTICAL	2 X 6 X 70	12	SEE 9	-	-
9	CENTER GATE HORIZONTAL	2 X 6 X CAR WIDTH-1	8	10	3 PER JOINT	10d
8	CROSS BRACE	2 X 6 X CUT TO FIT	30	SEE 7	-	-
7	SWAY BRACE LONGITUDINAL	2 X 6 X 159	12	8	3 PER JOINT	16d
6	SEAL **	1 1/4	72	-	-	-
5	STRAP **	1 1/4 X .035 X 10 FT	36	-	-	-
4	END GATE STRUT	4 X 4 X 33 *	48	1	2 PER JOINT	16d
3	END GATE STRUT CLEAT	2 X 2 X CAR WIDTH-1	4	1	2 PER JOINT	10d
2	END GATE STRUT CLEAT	2 X 4 X CAR WIDTH-1	12	1	3 PER JOINT	10d
1	END GATE VERTICAL	2 X 6 X 70	24	SEE 2, 3	-	-

LIST OF MATERIALS & NAILING DATA

* 2 X 6 STRUTS DOUBLED AND LAMINATED WITH 10d NAILS MAY BE SUBSTITUTED IN PLACE OF 4 X 4's.

** NOT REQUIRED FOR ONE LAYER HIGH LOADS


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.

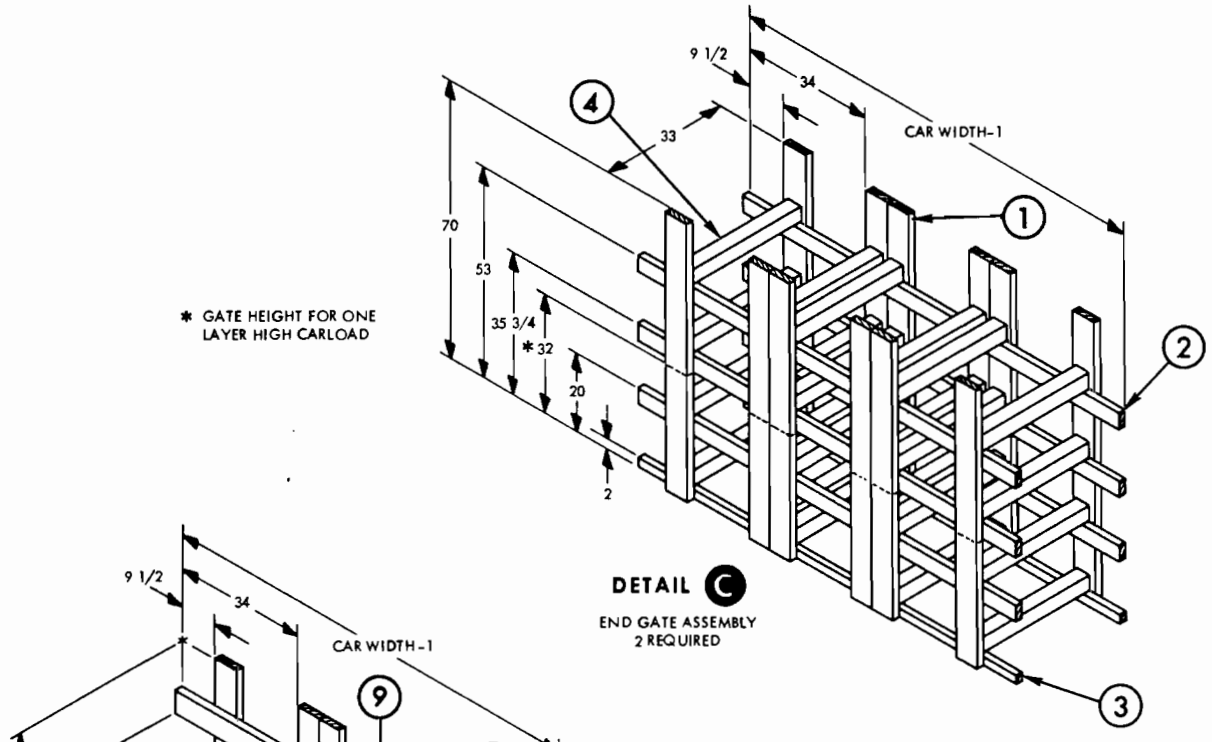

* GATE HEIGHT FOR ONE LAYER HIGH CARLOAD

DETAIL C

END GATE ASSEMBLY
2 REQUIRED

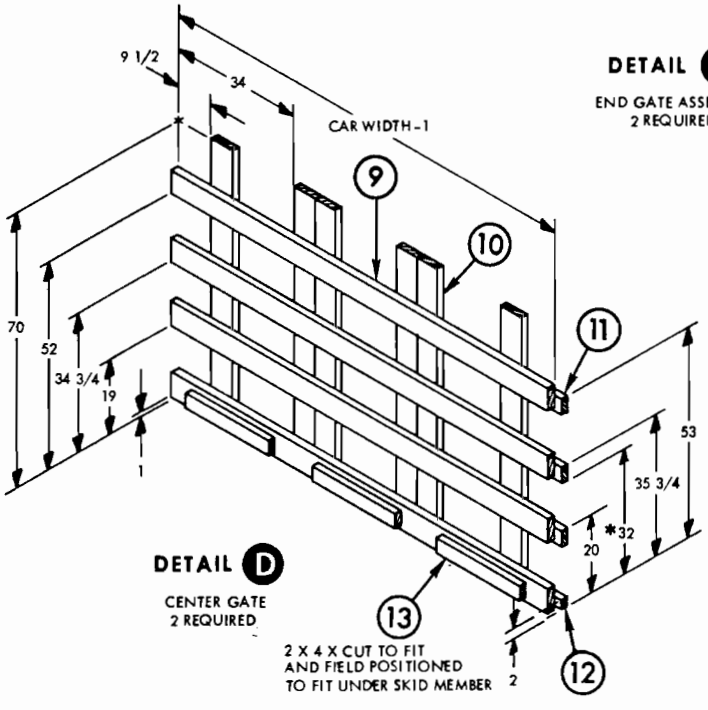


* GATE HEIGHT FOR ONE LAYER HIGH CARLOAD

DETAIL D

CENTER GATE
2 REQUIRED

2 X 4 X CUT TO FIT AND FIELD POSITIONED TO FIT UNDER SKID MEMBER

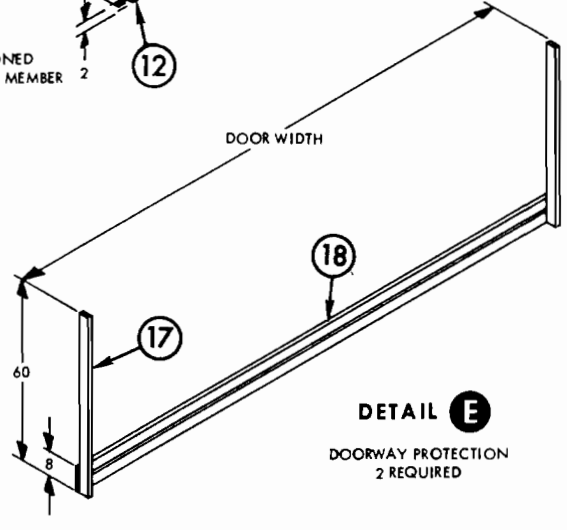


WHEN BOXCAR HAS STEEL DOOR POSTS, DOORWAY PROTECTION AS PER MIL-STD-1325 (NAVY) IS REQUIRED

DETAIL E

DOORWAY PROTECTION
2 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.

DUMMY SKID LOAD

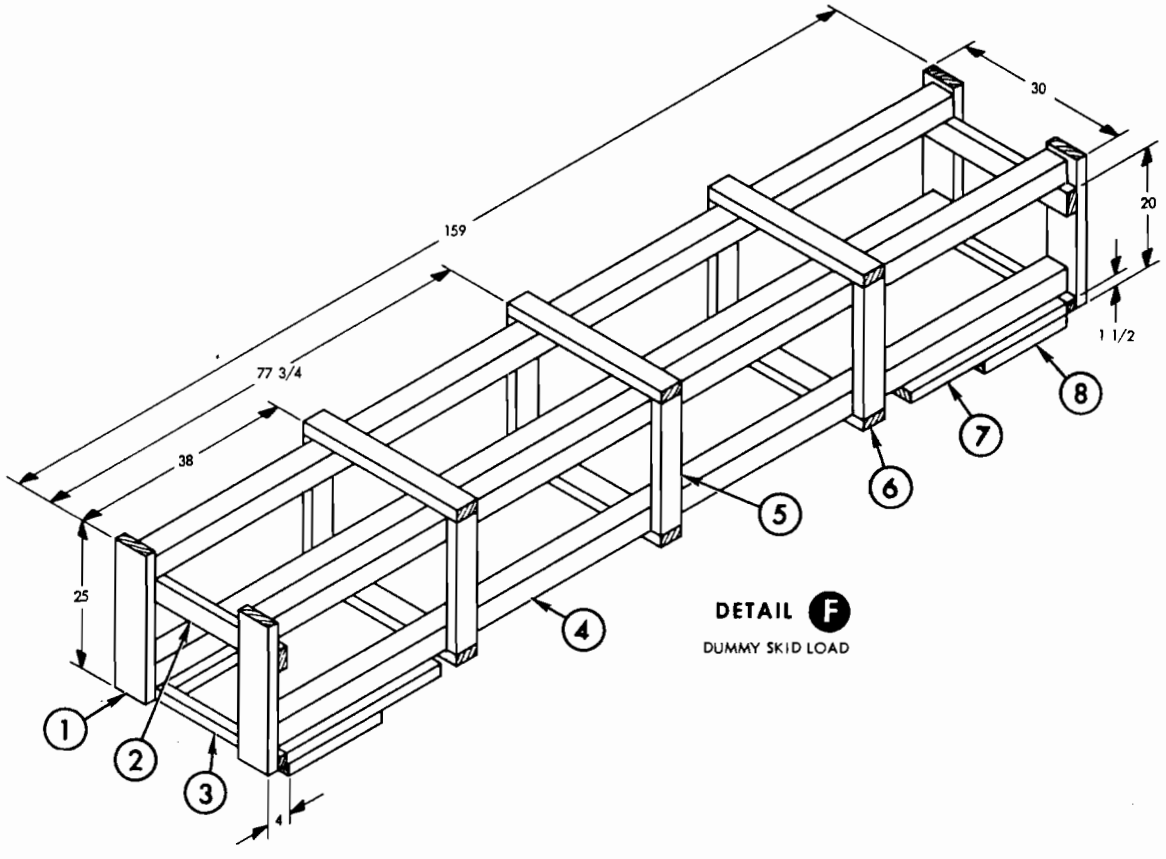

DETAIL F
DUMMY SKID LOAD

(1) TOE NAIL STRUT TO VERTICAL WITH 16d NAILS, 3 EACH END (TOP AND BOTH SIDES) ALSO END NAIL THROUGH VERTICAL WITH 16d NAILS, 2 EACH END.


PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NUMBER NAILS	SIZE
8	STOP	2 X 6 X 18	4	7	3	16d
7	SPACER	2 X 6 X 30	4	4	4	16d
6	HORIZONTAL SUPPORT PIECE	2 X 4 X 30	6	4	3 PER JOINT	16d
5	VERTICAL SUPPORT PIECE	2 X 4 X 22	6	4	3 PER JOINT	16d
4	STRUT	4 X 4 X 156	4	1	SEE NOTE (1)	
3	STRUT CLEAT	2 X 2 X 30	2	1	2 PER JOINT	16d CLNHD
2	STRUT CLEAT	2 X 4 X 30	2	1	3 PER JOINT	16d CLNHD
1	VERTICAL	2 X 6 X 25	4	SEE 2, 3	-	-

LIST OF MATERIALS & NAILING DATA


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.

53 FT 0 IN. FLATCAR, COMMERCIAL

1. THE CARLOAD CONSISTS OF 18 SKIDS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING.
2. WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED ON COMMERCIAL FLATCARS, THE PROCEDURE OUTLINED ON PAGE 11 SHALL BE FOLLOWED. THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR MUST BE COMPLIED WITH (SEE MIL-STD-1325 (NAVY).
3. SKIDDED LOADS STACKED TWO HIGH SHALL BE STRAPPED TOGETHER WITH FOUR BANDS OF STEEL STRAPPING, (PIECE 1), POSITIONED AS SHOWN (SEE END VIEW, PAGE 10).
4. AS ROWS ARE PLACED AGAINST EACH OTHER, PLACE AN ANTI-CHAFING FRAME, (SEE DETAIL A), BETWEEN EACH SKIDDED ROW.
5. STRAP THE TOP LAYER OF EACH STACK OF SKIDDED LOADS TOGETHER WITH TWO BANDS OF STEEL STRAPPING EACH END, (PIECES 15 & 16) POSITIONED AS SHOWN (SEE END VIEW, PAGE 10), AND SECURE WITH TWO DOUBLE CRIMPED SEALS (PIECE 2) PER BAND.
6. STRAP THE LOAD TO THE CAR WITH TWO BANDS OF STEEL TIE DOWN STRAPPING OVER EACH STACK OF SIX SKIDDED LOADS, POSITIONED AS SHOWN. TENSION AND SECURE THE TIE DOWN STRAPPING (PIECE 17) TO THE CAR AS FOLLOWS:
   - A. RUN STRAPPING FROM SIDE OF THE LOAD DOWN TO AND UP THROUGH THE STAKE POCKET.
   - B. POSITION STAKE POCKET PAD (PIECE 18) IN PLACE ON ONE SIDE OF THE CAR AND SECURE WITH SEAL (PIECE 20).
   - C. CONTINUE STARPPING (PIECE 17) BACK UP AND OVER THE UPPER LAYER SKID FRAMES.
   - D. POSITION EDGE PROTECTOR PADS (PIECE 19) IN PLACE OVER THE OUTBOARD EDGES OF THE OUTER ROW SKID FRAMES AND SECURE WITH SEALS (PIECE 20).
   - E. CONTINUE STRAPPING DOWN TO AND THROUGH THE STAKE POCKET ON THE OPPOSITE SIDE OF THE CAR.
   - F. POSITION STAKE POCKET PAD AND SECURE WITH SEAL.
   - G. POSITION STRAPPING BOARD (PIECE 21) OVER STRAP AS SHOWN AND RUN TIE DOWN STRAPPING BACK UP AND OVER THE STRAPPING BOARD AND DOWN THE SIDE OF THE LOAD WHERE IT IS TENSIONED AND SEALED WITH TWO DOUBLED CRIMPED SEALS.

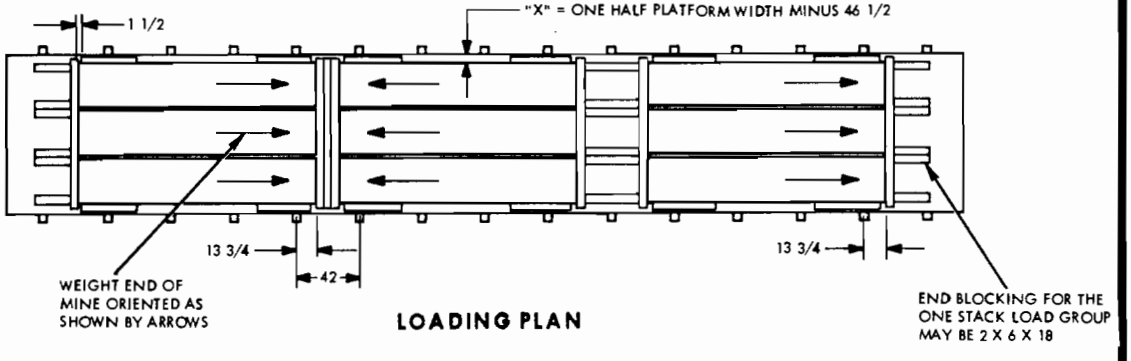

LOADING PLAN

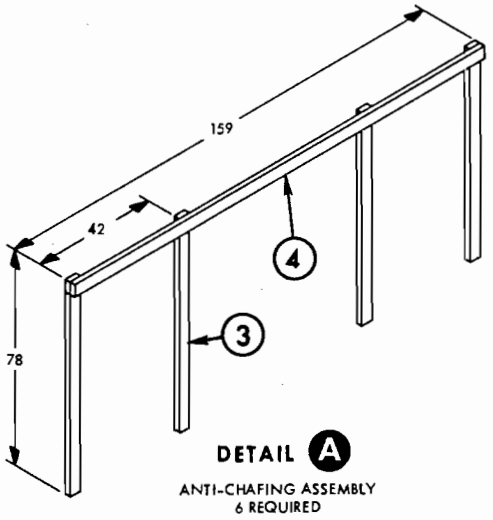


DETAIL A

ANTI-CHAFING ASSEMBLY
6 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.

CARLOAD DATA


MINE MK 60 MOD 0 CONFIGURATION	NUMBER OF SKIDS	LOAD WEIGHT (APPROX)	DUNNAGE WEIGHT (APPROX)	CARLOAD WEIGHT (APPROX)
"SHIPPING"	18	39348 LBS	1083 LBS	40431 LBS
"01"	18	54288 LBS	1083 LBS	55371 LBS
"02"	18	48708 LBS	1083 LBS	49791 LBS

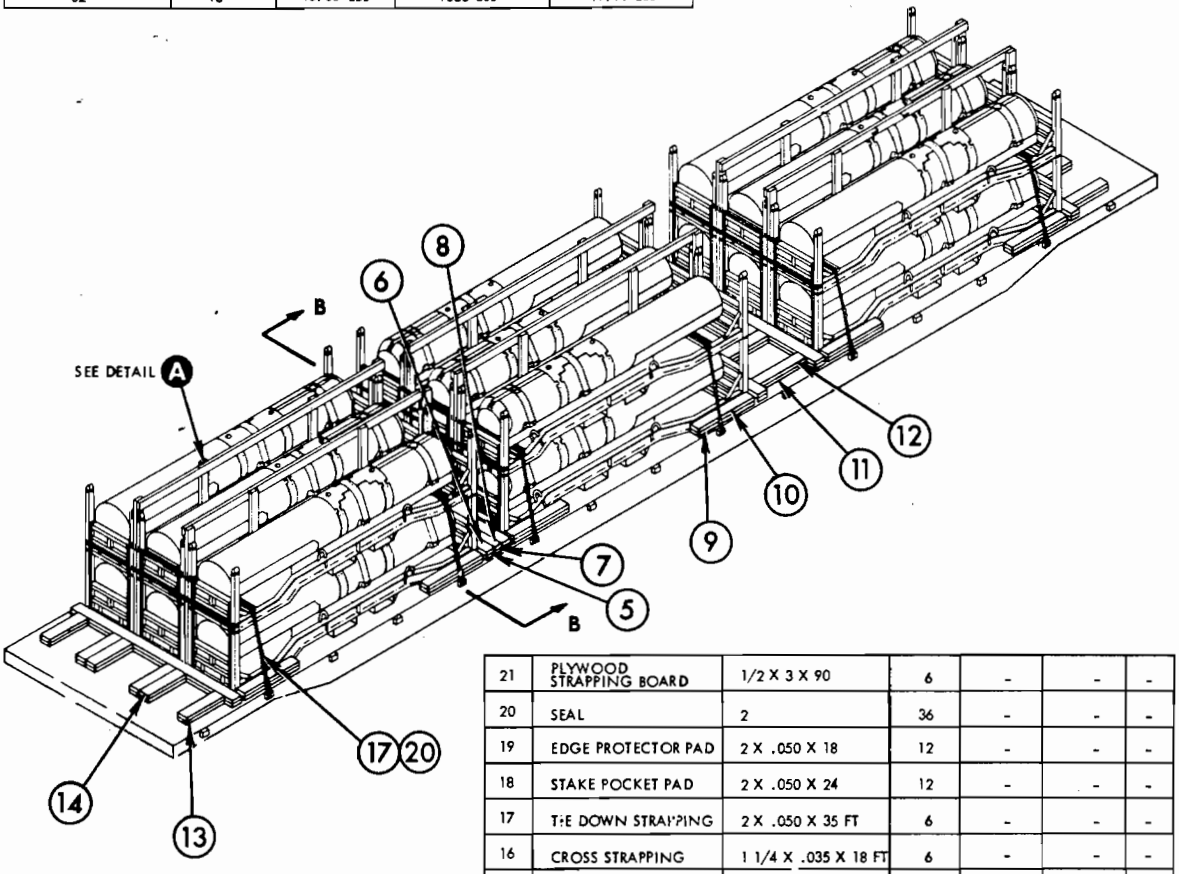

PIECE NO.	DESCRIPTION	SIZE	NO. OF PIECES REQ'D	NAIL TO	NUMBER NAILS	SIZE
21	PLYWOOD STRAPPING BOARD	1/2 X 3 X 90	6	-	-	-
20	SEAL	2	36	-	-	-
19	EDGE PROTECTOR PAD	2 X .050 X 18	12	-	-	-
18	STAKE POCKET PAD	2 X .050 X 24	12	-	-	-
17	TIE DOWN STRAPPING	2 X .050 X 35 FT	6	-	-	-
16	CROSS STRAPPING	1 1/4 X .035 X 18 FT	6	-	-	-
15	CROSS STRAPPING	1 1/4 X .035 X 9 FT	6	-	-	-
14	END BLOCKING	2 X 6 X 24	12	13	4	60d
13	END BLOCKING	2 X 6 X 24	12	CAR FLOOR	4	30d
12	INTERMEDIATE BLOCKING	2 X 6 X 34 1/2	6	11	5	60d
11	INTERMEDIATE BLOCKING	2 X 6 X 34 1/2	6	CAR FLOOR	5	30d
10	SIDE BLOCKING	2 X 6 X 36	12	9	6	30d
9	SIDE BLOCKING	2 X 6 X 36	12	CAR FLOOR	6	30d
8	CROSS MEMBER	2 X 4 X 104	1	7	1 EVERY 8 INCHES	60d
7	CROSS MEMBER	2 X 4 X 104	1	CAR FLOOR	1 EVERY 8 INCHES	30d
6	CROSS MEMBER	2 X 6 X 104	6	5	1 EVERY 8 INCHES	60d
5	CROSS MEMBER	2 X 6 X 104	6	CAR FLOOR	1 EVERY 8 INCHES	30d
4	ANTI-CHAFING TIE PIECE	2 X 4 X 13 FT 3	6	3	2 PER JOINT	10d
3	ANTI-CHAFING VERTICAL	2 X 4 X 78	24	SEE 4	-	-
2	SEAL	1 1/4	96	-	-	-
1	VERTICAL STRAPPING	1 1/4 X .035 X 11 FT	36	-	-	-


LIST OF MATERIALS & NAILING DATA

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.

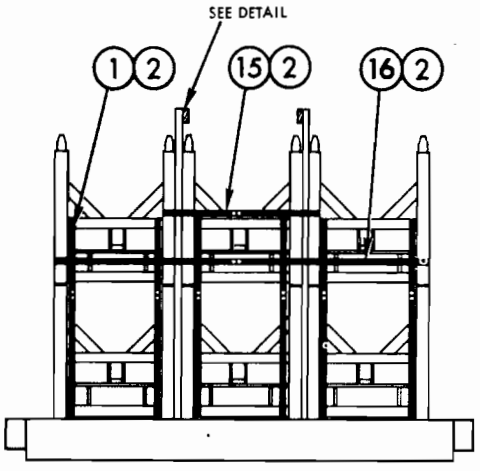


END VIEW

SHOWING VERTICAL STRAPPING
AND CROSS STRAPPING
(TIE DOWN STRAPPING AND FLOOR
BLOCKING OMITTED FOR CLARITY)

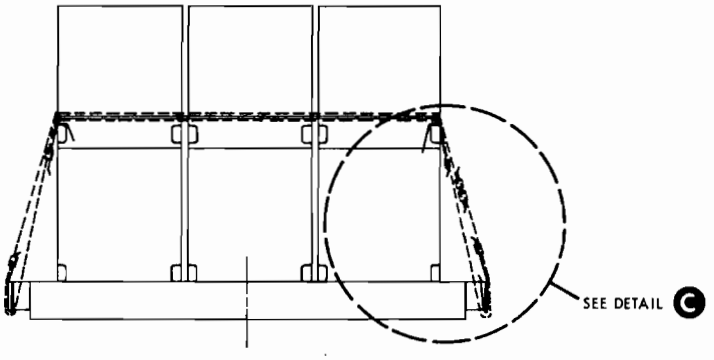

SECTION B-B

SHOWING DOUBLE THREADED TIE DOWN
STRAPPING WITH EDGE PROTECTOR PAD, STRAPPING
BOARD, AND STAKE POCKET PAD

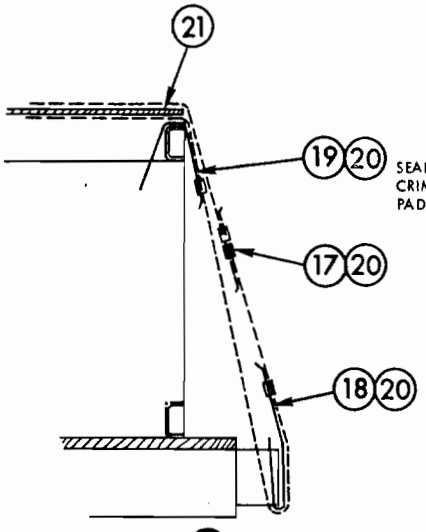

SEAL DOES NOT REQUIRE
CRIMPING WHEN EDGE PROTECTOR
PAD IS BENT AS SHOWN

DETAIL C


SHOWING STAKE POCKET PAD,
EDGE PROTECTOR PAD, AND
PLYWOOD STRAPPING BOARD

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.


LESS THAN CARLOAD

USE FILLER ASSEMBLY (DETAIL D) AS SHOWN WHEN SHIPPING LCL. POSITION FILLER ASSEMBLY TOP LAYER, CENTER ROW OF ONE OR TWO STACKS AS REQUIRED.

NOTE:
FILLER ASSEMBLY SHALL BE STRAPPED TO LOWER SKID WITH VERTICAL STRAPPING SIMILAR TO STRAPPING PROCEDURE SHOWN ON PAGE 10.

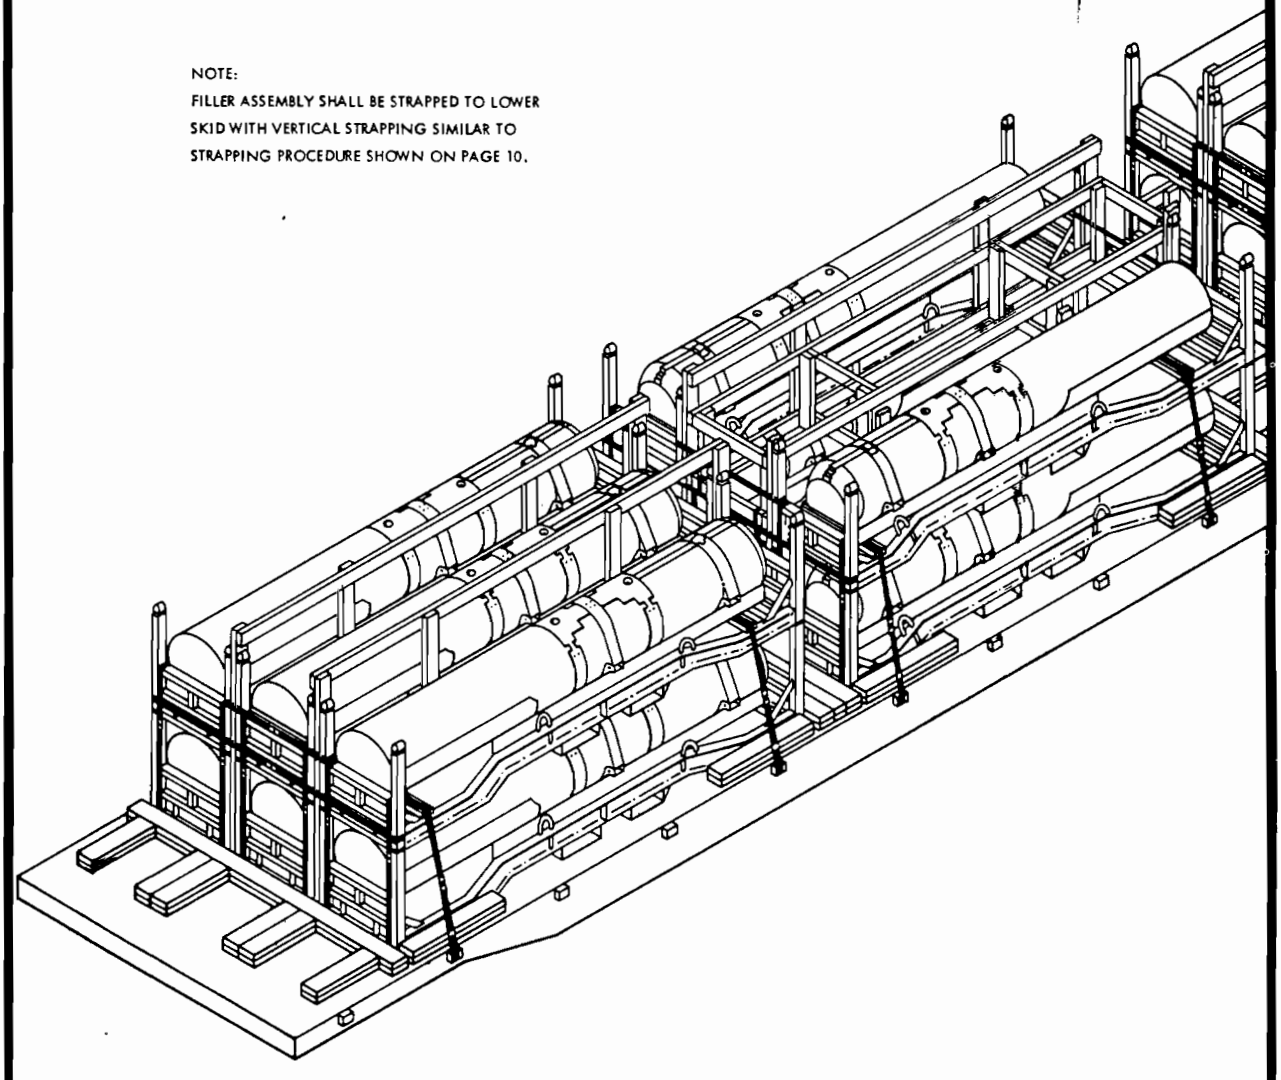

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.

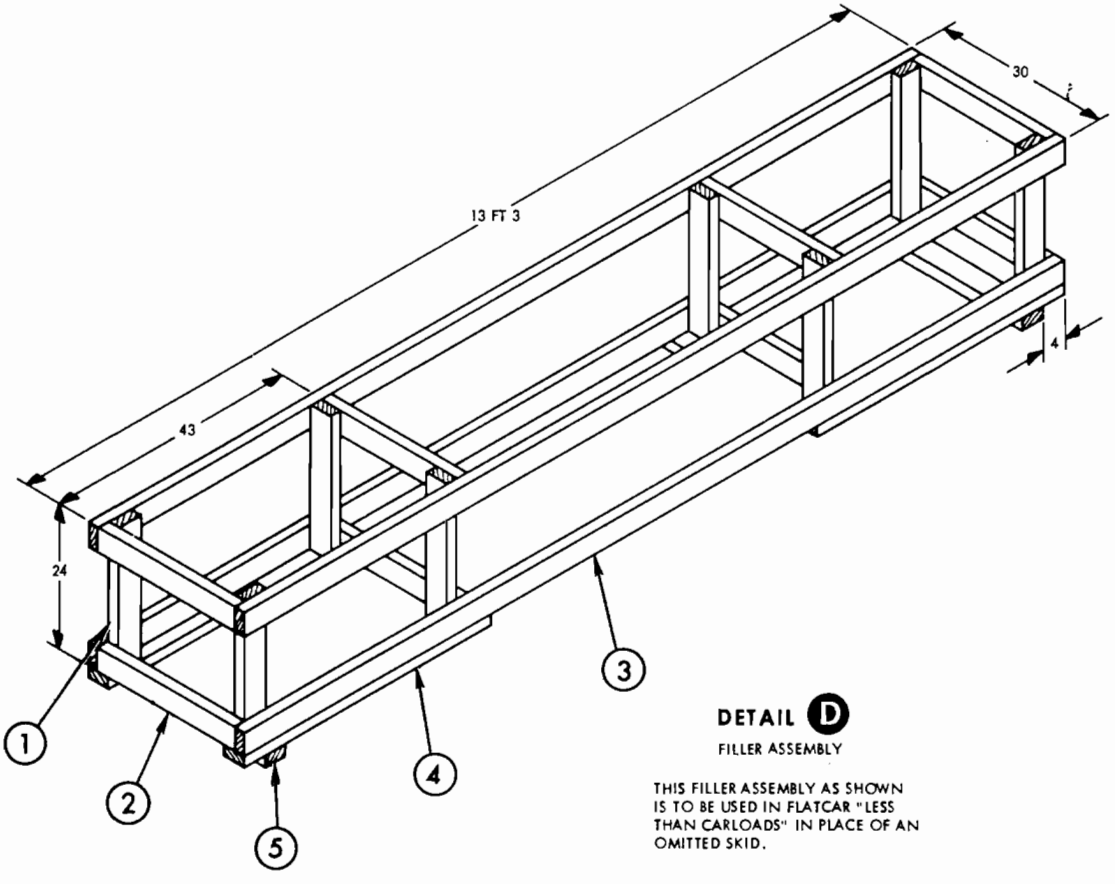

DETAIL D

FILLER ASSEMBLY

THIS FILLER ASSEMBLY AS SHOWN IS TO BE USED IN FLATCAR "LESS THAN CARLOADS" IN PLACE OF AN OMITTED SKID.

* QUANTITIES SHOWN ARE FOR ONE FILLER ASSEMBLY

PIECE NO.	DESCRIPTION	SIZE	NO.* OF PIECES REQ'D	NAIL TO	NUMBER NAILS	SIZE
5	STOP	2 X 4 X 30	2	4	3 PER JOINT	10d
4	SUPPORT	2 X 4 X 48	4	2	2 PER JOINT	10d
3	LONGITUDINAL	2 X 4 X 13 FT 3	4	2	1 PER JOINT	10d
2	HORIZONTAL	2 X 4 X 27	8	1	3 PER JOINT	10d
1	VERTICAL	2 X 4 X 24	8	3	2 PER JOINT	10d

LIST OF MATERIALS & NAILING DATA

☆U.S. GOVERNMENT PRINTING OFFICE: 1977-703-122/6714

REVIEW ACTIVITY
NAVY - OS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO. 8140 - N166)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:03Z
Check the source to verify that this is the current version before use.