MILITARY STANDARD

MIL-STD-1325-8 (
(NAVY)


8 MARCH 1976

SUPERSEDING
WP 52 85
26 SEPTEMBER 1967

RAILCAR LOADING OF HAZARDOUS MATERIALS

BOMB, GENERAL PURPOSE, MK 84 MODS 0, 1, & 2 (2000 LB) IN UNIT LOAD ADAPTER MX 79 MOD 0

UNIT LOAD DATA	DODIC/NALC NO.	F270
UNIT LOAD SPACING		WR-54/127
WEIGHT (APPROXIMATE)		4053 LBS
DIMENSIONS		99L X 38W X 24 1/4H
STACKING HEIGHT		23
USE		50 T CU FT
DOT HAZARD CLASSIFICATION		EXPLOSIVE A

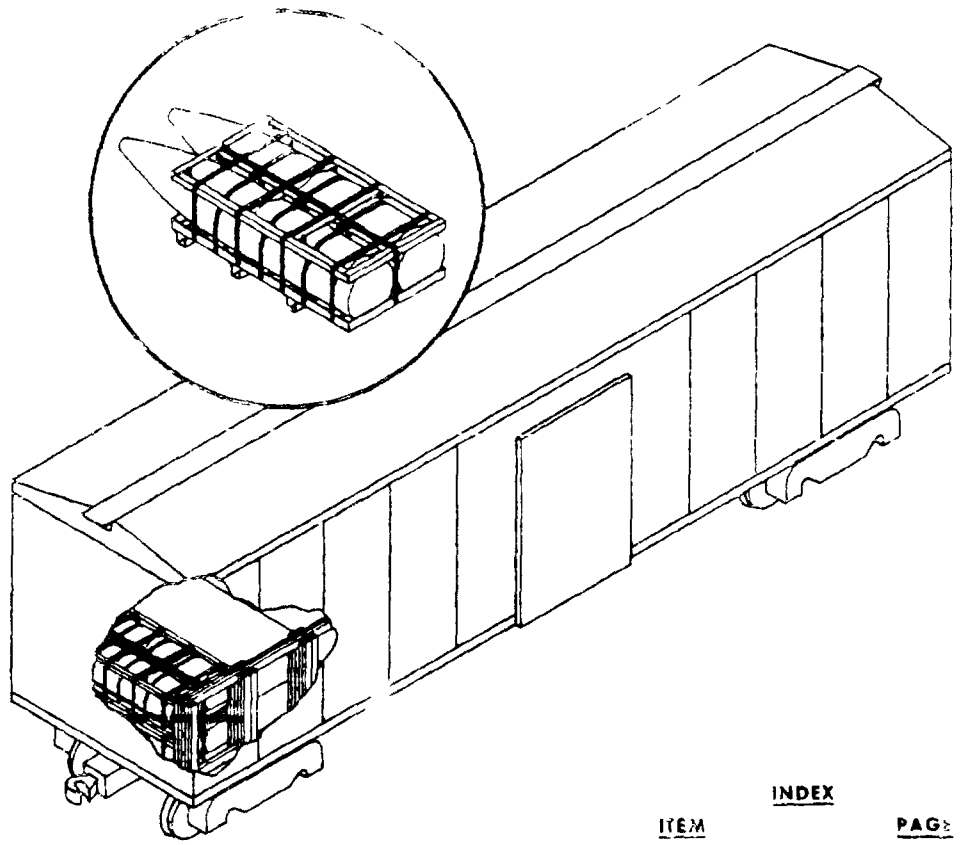

INDEX

ITEM	PAGE
GENERAL NOTE	-
50 T CARLOAD COMBI	2 THRU 6

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CONTAINERLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS MIL-HDBK-736 (NAVY)

FSC 8140

AUTHORIZED AND RELEASED FOR GENERAL USE

[signature] 3/8/76
ORIGINATOR (TECHNICAL DIRECTION AGENT [TDA]) DATE

[signature] 3/8/76
NAVSEA (SEA 03) DATE

APPROVED BY BUREAU OF EXPLOSIVES

[signature] 2/5/76
SIGNATURE SUPERVISOR MILITARY & INTERMODEL SERVICES DATE

ORIGINATOR [signature] 3/3/76
SIGNATURE

NAVAL WEAPONS HANDLING LABORATORY
WILLIAM EARLE, NEW JERSEY

PAGE 1 OF 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 FOR GENERAL INFORMATION CONCERNING ORDERING, INSPECTING AND PREPARING CARS AND FOR DUNNAGING MATERIALS DESIGN AND INSTALLATION OF DUNNAGE SEE THE GENERAL DOCUMENT MIL-STD-1325 (NAVY) "RAILCAR LOADING OF HAZARDOUS MATERIALS"

2 WHEN PLANNING SHIPMENTS ORDER THE MINIMUM NUMBER OF CARS OF THE CAPACITY REQUIRED FOR THE SHIPMENT

3 LOADING PLANS SHOWN ARE FOR COMMERCIAL BOXCARS WITH 50 FT 6 INCHES INSIDE LENGTH 110 INCHES INSIDE WIDTH

4 THE "LOAD LIMIT" OF A CAR MUST NOT BE EXCEEDED NOR SHOULD THE RAILCAR BE LOADED SO THAT MORE THAN ONE-HALF OF THE "LOAD LIMIT" IS CARRIED BY ONE SET OF TRUCKS

5 IF END WALLS OF CARS ARE NOT SQUARE THEY MUST BE SQUARED OFF BEFORE STARTING TO LOAD CAR

6 THE LOAD CONSISTS OF 2000 LB MK 84 MOD 0 1 OR 2 BOMBS PALLETIZED IN ACCORDANCE WITH WR-54/127

7 THE UNIT LOADS ARE HANDLED AND LOADED WITH A SUITABLE FORK LIFT TRUCK

8 UNLESS OTHERWISE SPECIFIED NAILING SHALL BE IN ACCORDANCE WITH MIL-STD-1325 (NAVY)

9 ALL STRAP JOINTS SHALL BE CRIMP-TYPE JOINTS MADE WITH A CRIMPING TOOL THAT DOES NOT CUT THE SEAL OR STRAP RATHER THAN A TOOL THAT MAKES A NOTCH-TYPE JOINT THE STRAPPING MUST BE IN ACCORDANCE WITH NAVSUP NOTICE 4642 DATED 21 APRIL 1971

10 APPLICABLE MATERIAL SPECIFICATIONS

DUNNAGE LUMBER - FED SPEC MM-L-751

NAILS - FED SPEC FF-N-105

STRAPPING - FED SPEC QQ-S-781 TYPE I, HEAVY DUTY CLASS A DRY (UNLUBRICATED)

SEALS - FED SPEC QQ-S-781 STYLE III HEAVY DUTY

11 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CAR IN AN ACCESSIBLE AREA CLOSE AND SEAL BOXCAR DOORS AND ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF CAR AS PRESCRIBED IN OP 2165 (VOL 1)

50 FT. 6 IN. BOXCAR, COMMERCIAL

1 THE CARLOAD CONSISTS OF 30 UNIT LOADS WHICH MUST BE LOADED AND DUNNAGED IN ACCORDANCE WITH THIS PROCEDURAL DRAWING

2 WHEN LESS THAN CARLOAD (LCL) QUANTITIES ARE REQUIRED TO BE SHIPPED IN COMMERCIAL BOXCARS AND A PARTIAL LAYER RESULTS THE PARTIAL LAYER OF LADING SHALL BE BRACED AS FOLLOWS

A BOXCARS WITH WOOD SIDEWALLS - BRACE BY MEANS OF END BRACING AND/OR PARTIAL LAYER BRACING CONSTRUCTED IN ACCORDANCE WITH MIL-STD-1325-100 (NAVY) SELECT THE TYPE OF BRACE TO COMPLY WITH THE WEIGHT OF THE UNITS TO BE RETURNED

B BOXCARS WITH WOOD OR METAL SIDEWALLS - BRACE BY MEANS OF PARTIAL LAYER BRACING CONSTRUCTED IN ACCORDANCE WITH MIL-STD-1325-102 (NAVY) SELECT THE TYPE OF BRACE TO COMPLY WITH THE WEIGHT OF THE UNITS TO BE RETAINED

THE CENTER GATE HEIGHT SHOULD BE ADJUSTED AS REQUIRED THE WEIGHT DISTRIBUTION REQUIREMENTS OF THE AAR MUST BE COMPLIED WITH (SEE MIL-STD-1325 (NAVY))

3 THE LOADS AS SHOWN ARE BASED ON CARS WHICH HAVE 10 FT WIDE DOORWAY OPENINGS AND ARE EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE APPLICABLE TO BOXCARS EQUIPPED WITH CONVENTIONAL SLIDING TYPE DOORS OTHER THAN 10 FT WIDE PROVIDING THE LENGTH OF PIECES 3 AND 10 ARE ADJUSTED AS REQUIRED TO SUIT THE PARTICULAR DOORWAY OPENING

4 THE DEPICTED PROCEDURES AND METHODS OF BLOCKING ARE ALSO APPLICABLE TO BOXCARS EQUIPPED WITH PLUG TYPE DOORS DIMENSIONAL LUMBER DOORWAY PROTECTION IS NOT REQUIRED WHEN USING BOXCARS EQUIPPED SOLELY WITH PLUG DOORS HOWEVER, WHEN USING BOXCARS EQUIPPED WITH A COMBINATION OF PLUG DOOR AND CONVENTIONAL SLIDING TYPE DOOR DIMENSIONAL LUMBER DOORWAY PROTECTION (SEE DETAIL D) IS REQUIRED FOR THE CONVENTIONAL DOOR SECURELY CLOSE DOORS AND WIRE TOGETHER WITH A STRONG FLEXIBLE STEEL WIRE INSERTED THROUGH THE HOLES IN THE DOOR LATCH ASSEMBLY ONE OR MORE TIMES AND THE WIRE ENDS TWISTED TOGETHER

5 FOR THOSE STACKS IN THE DOORWAY AREA THE BASE END SWAY BRACE VERTICAL (PIECE 7) MUST BE DECREASED BY ONE THICKNESS TO ALLOW POSITIONING BASE END DOORWAY PROTECTION

6 WHEN BOXCARS OTHER THAN 9FT 2 IN WIDE ARE USED, THE BASE END SWAY BRACE VERTICALS (PIECE 7) MUST BE INCREASED OR DECREASED AS NECESSARY FOR A TIGHT LOAD ACROSS THE CAR

**2 X 6 STRUTS DOUBLED AND LAMINATED WITH 10d NAILS MAY BE SUBSTITUTED IN PLACE OF 4 X 4 s

*DOUBLED 2 X 4's CUT TO SUIT AND FIELD POSITIONED TO FIT UNDER BOTTOM FRAME AND BETWEEN SKIDS OF THE LOWER UNIT LOAD


PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER NAILS	SIZE NAILS
19	STRUT	4 X 4 X WEDGE FIT**	24	14	2 PER JOINT	16d
18	CENTER GATE HOLD DOWN*	2 X 4 X TO SUIT	4	17	4	10d
17	CENTER GATE HOLD DOWN*	2 X 4 X TO SUIT	4	16	4	10d
16	CENTER GATE FILLER	2 X 4 X CAR WIDTH - 1	2	14	3 PER JOINT	10d
15	CENTER GATE STRUT CLEAT	2 X 4 X CAR WIDTH - 1	8	14	3 PER JOINT	10d
14	CENTER GATE VERTICAL	2 X 6 X 54	12	SEE 13 15, 16	-	-
13	CENTER GATE HORIZONTAL	2 X 6 X CAR WIDTH - 1	8	14	3 PER JOINT	10d
12	SEAL	1 1/4	4	-	-	-
11	STRAP	1 1/4 X .035 X 77 FT	2	-	-	-

PIECE NO	DESCRIPTION	SIZE	NO OF PIECES REQ'D	NAIL TO	NUMBER NAILS	SIZE NAILS
10	HORIZONTAL DOORWAY MEMBER	2 X 4 X 12 FT 4	4	9	2 PER JOINT	10d
9	VERTICAL DOORWAY MEMBER	2 X 4 X 60	4	SEE 10	-	
8	SWAY BRACE FILLER	2 X 4 X 9	30	7	3	10d
7	SWAY BRACE VERTICAL	2 X 4 X 48	AS REQ'D	6 7	2 PER JNT 3	10d
6	SWAY BRACE HORIZONTAL	2 X 4 X 38	30	SEE 7	-	-
5	TIE PIECE	2 X 6 X 12	4	1 3	2 PER JOINT	10d
4	DOORWAY SWAY BRACE VERTICAL	2 X 6 X 48	6	3	3 PER JOINT	10d
3	DOORWAY SWAY BRACE HORIZONTAL	2 X 6 X 12 FT 4	2	SEE 4	-	-
2	SWAY BRACE VERTICAL	2 X 6 X 48	24	1	3 PER JOINT	10d
1	SWAY BRACE HORIZONTAL	2 X 6 X 114	8	SEE 2	-	-

LIST OF MATERIALS & NAILING DATA

LIST OF MATERIALS & NAILING DATA


Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

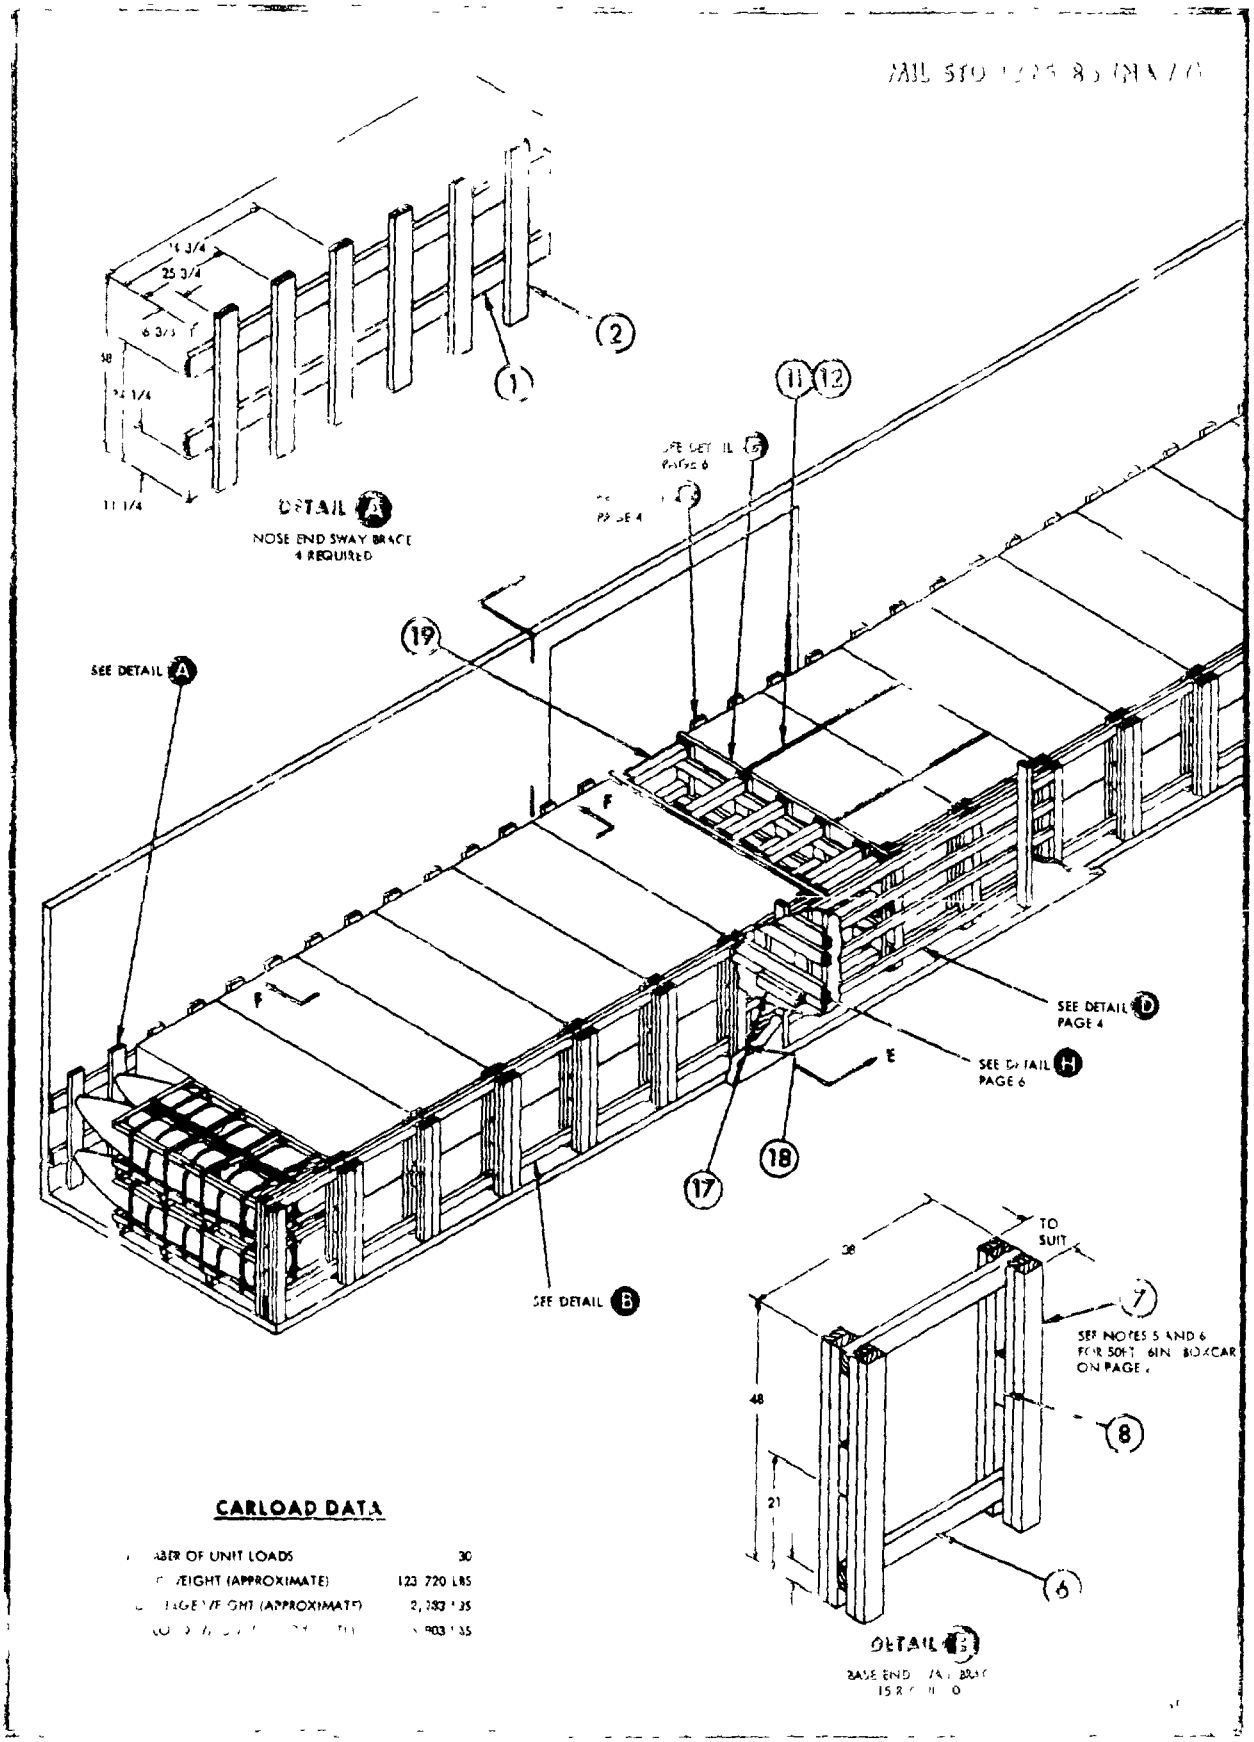

CARLOAD DATA


NUMBER OF UNIT LOADS	30
WEIGHT (APPROXIMATE)	123 720 LBS
[illegible]	[illegible]

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

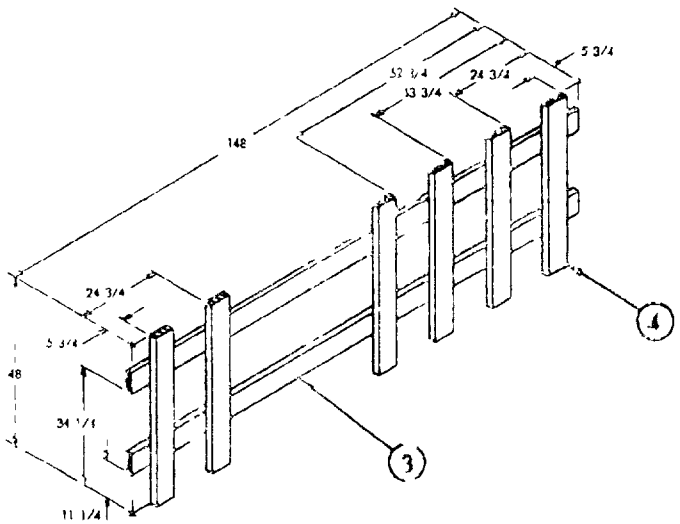

DETAIL C


NOSE END DOORWAY SWAY BRACE
1 REQUIRED

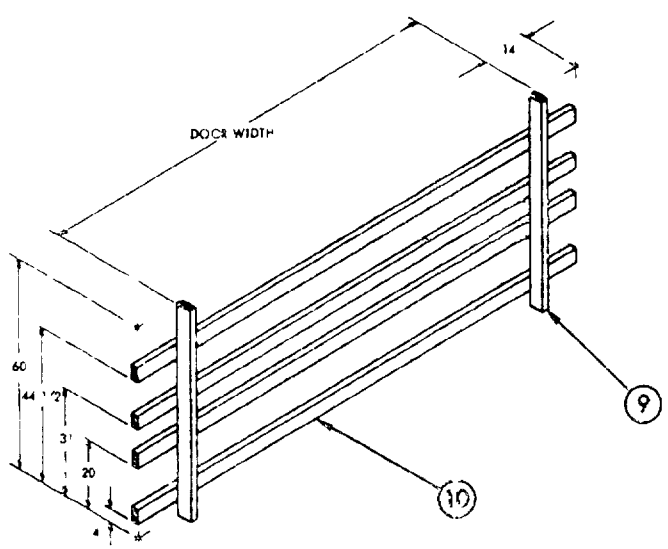


DETAIL D

BASE END DOORWAY PROTECTOR
1 REQUIRED

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

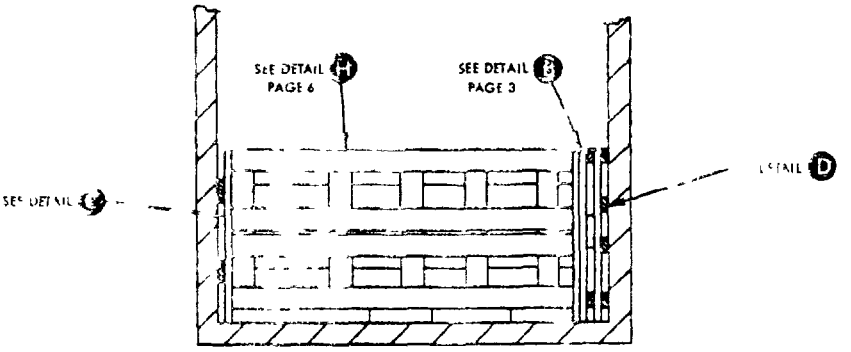


SECTION E-E
(UNIT LOAD OMITTED FOR CLARITY

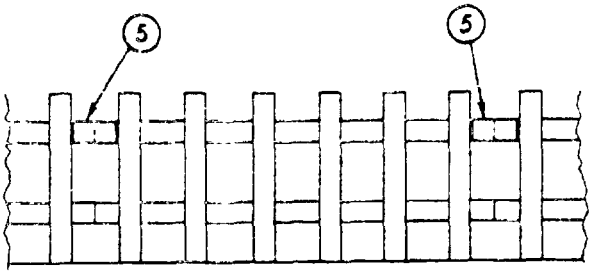


SECTION F-F
SHOWING TIE PIECE ON UPPER HORIZONTA
UNIT LOADS REMOVED FOR CLARITY

DIRECTION OF ARROW
INDICATED NOSE END
OF BOMB

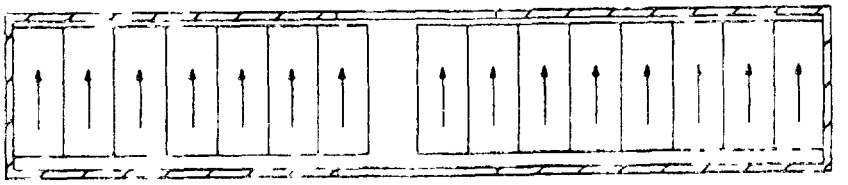


LOADING PLAN

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

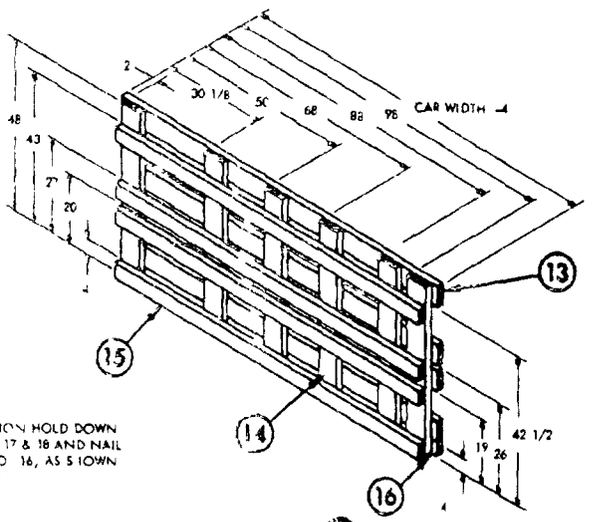

NOTE: FIELD POSITION HOLD DOWN PIECES NO. 17 & 18 AND NAIL TO PIECE NO. 16, AS SHOWN IN DETAIL H

DETAIL G
CENTER GATE
1 REQUIRED

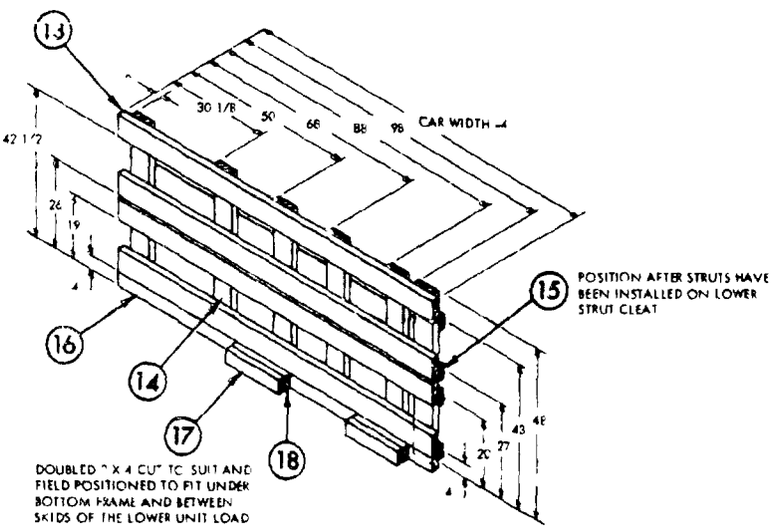

DOUBLED 2 X 4 CUT TO SUIT AND FIELD POSITIONED TO FIT UNDER BOTTOM FRAME AND BETWEEN SKIDS OF THE LOWER UNIT LOAD

DETAIL H
CENTER GATE
1 REQUIRED

REVIEW ACTIVITY
NAVY - OS - AS

PREPARING ACTIVITY
NAVY - OS
(PROJECT NO. 8140-N111)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDING OFFICER
NAVAL WEAPONS STATION EARLE
NAVAL WEAPONS HANDLING LABORATORY (803)
COLTS NECK, NEW JERSEY 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval No 22-R285

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help [illegible] ...ment of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-STD-1325-85 (Navy)

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY (Printed or typed name and address - Optional)	TELEPHONE NO
	DATE

DD FORM 1426

REPLACES EDITION OF [illegible] WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:01Z
Check the source to verify that this is the current version before use.