MILITARY STANDARD


MIL-STD-1386-33
(NAVY)
19 JULY 1974

LOADING OF HAZARDOUS MATERIALS AND ASSOCIATED ITEMS IN MILVAN CONTAINERS

CARTRIDGE, 20MM
IN SMALL ARMS AMMUNITION BOX MK 1 MOD 0
FLEET ISSUE UNIT LOAD

UNIT LOAD DATA

UNIT LOAD DRAWING	WR-54 9, WR-54/11 OR WR-54/137
DIMENSIONS	47 1/2 L X 37 W X 34 7/8 H
CUBE	35 3 CU FT
OTHER	SEE TABLE I, PAGE 5

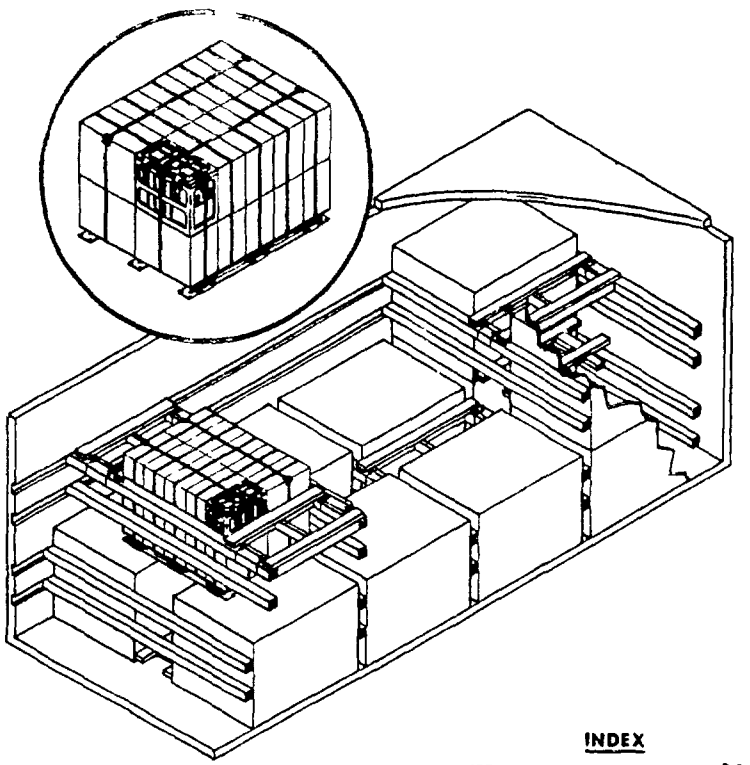

NOTES

1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
2. FOR CROSS REFERENCE TO ASSOCIATED PALLETIZING, TRUCKLOADING AND CARLOADING MILITARY STANDARDS, REFER TO THE INDEX TO STANDARDS, MIL-HDBK-236 (NAVY)

INDEX

ITEM	PAGE
GENERAL NOTES	4
COFC & CONTAINERSHIP	2 3 5
DETAILS	4

FSC 9140

AUTHORIZED FOR CONTAINER-ON-FLAT-CAR (COFC), CONTAINERSHIP AND MOVEMENT ABOARD DEPOT (NON-PUBLIC) ROADS ONLY.

US COAST GUARD APPROVAL NOT REQUIRED

APPROVED BY BUREAU OF EXPLOSIVES

DATE 6/17/74


M.S. Gray NWHL 7/1/74
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) DATE

SIGNATURE ORDSYSCOM BY DIRECTION 7/1/74 DATE

ORIGINATOR Charles McBride 7/1/74
SIGNATURE


NAVAL WEAPONS HANDLING LABORATORY
N A D EARLE, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.

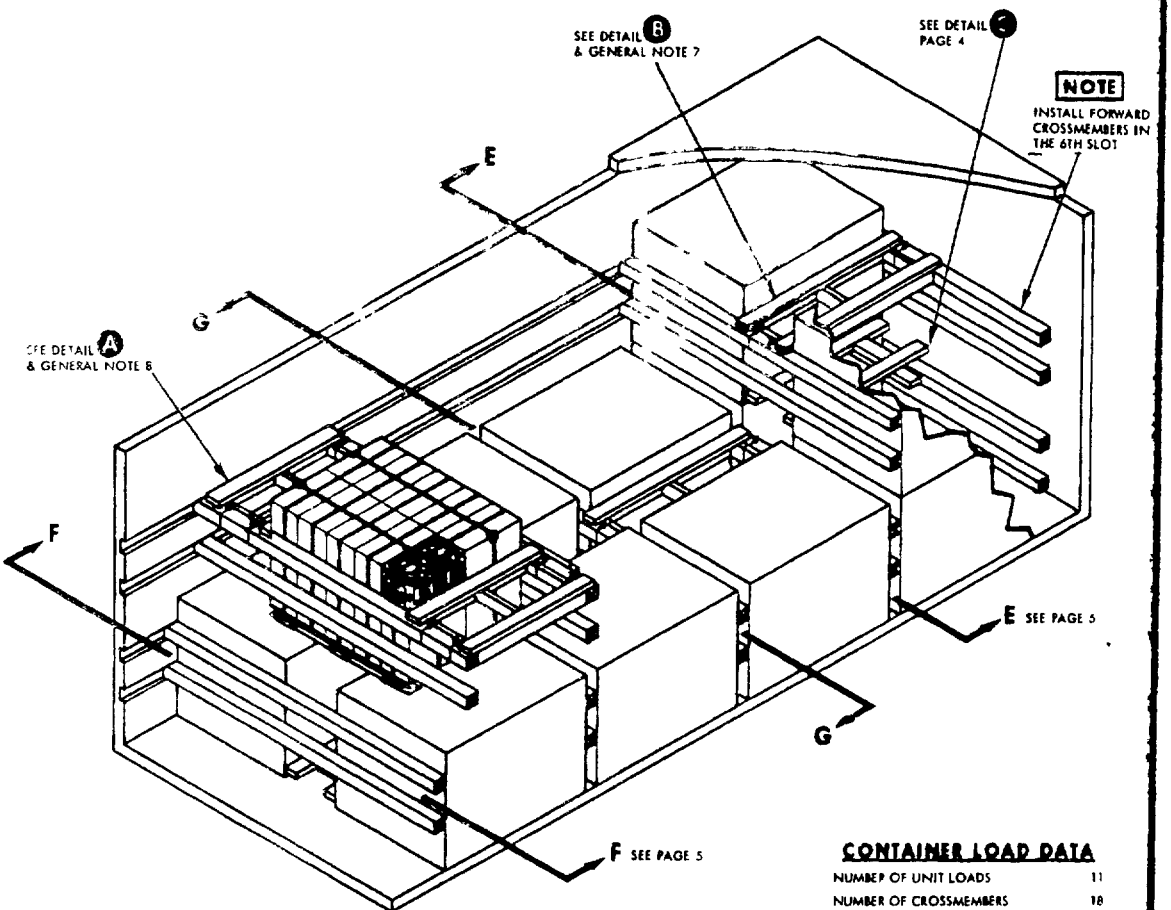

CONTAINER LOAD DATA


NUMBER OF UNIT LOADS	11
NUMBER OF CROSSMEMBERS	18
LOAD WEIGHT	SEE TABLE I, PAGE 5
DUNNAGE WEIGHT	192 LBS
CONTAINER WEIGHT	5,785 LBS
GROSS WEIGHT	SEE TABLE I, PAGE 5

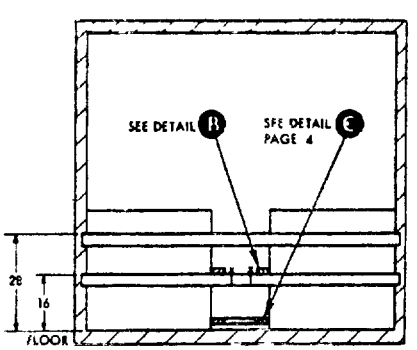

SECTION G-G


PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NUMBER	SIZE
	LIST OF MATERIALS AND NAILING DATA				NAILS	
9	SUPPORT	2 x 4 x 42 1/2	4	8	1 PER JOINT	16c
				4	4	16c
8	STRUT	2 x 4 TO SUIT	6	SEE 7	-	-
7	LONGITUDINAL	2 x 4 x 37	4	8	2 PER JOINT	16d
6	SUPPORT	2 x 4 x 52 1/2	6	5	1 PER JOINT	16d
				4	4	16c
5	STRUT	2 x 4 TO SUIT	9	SEE 4	-	-
4	LONGITUDINAL	2 x 4 x 47	6	5	2 PER JOINT	16d
3	SPACER	2 x 4 TO SUIT	10	1	3	10d
2	STRINGER	2 x 4 x 45 1/2	10	1	3 PER JOINT	10d
1	SUPPORT	2 x 4 x 29 1/2	10	SEE 2	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.

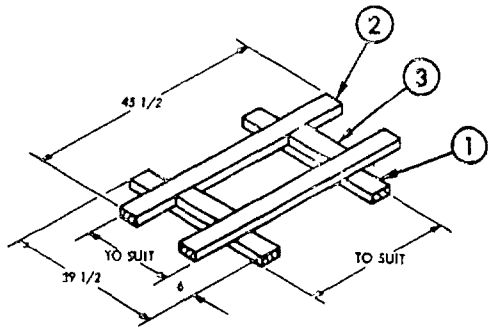


DETAIL C
SWAY BRACE
SEE GENERAL NOTE 6

NOTE
LOCATE SWAY BRACE DETAIL C ON THE 48 AND 60 INCH CROSSMEMBERS IN ALTERNATE BAYS TO PREVENT INTERFERENCE OF SWAY BRACES WITH EACH OTHER

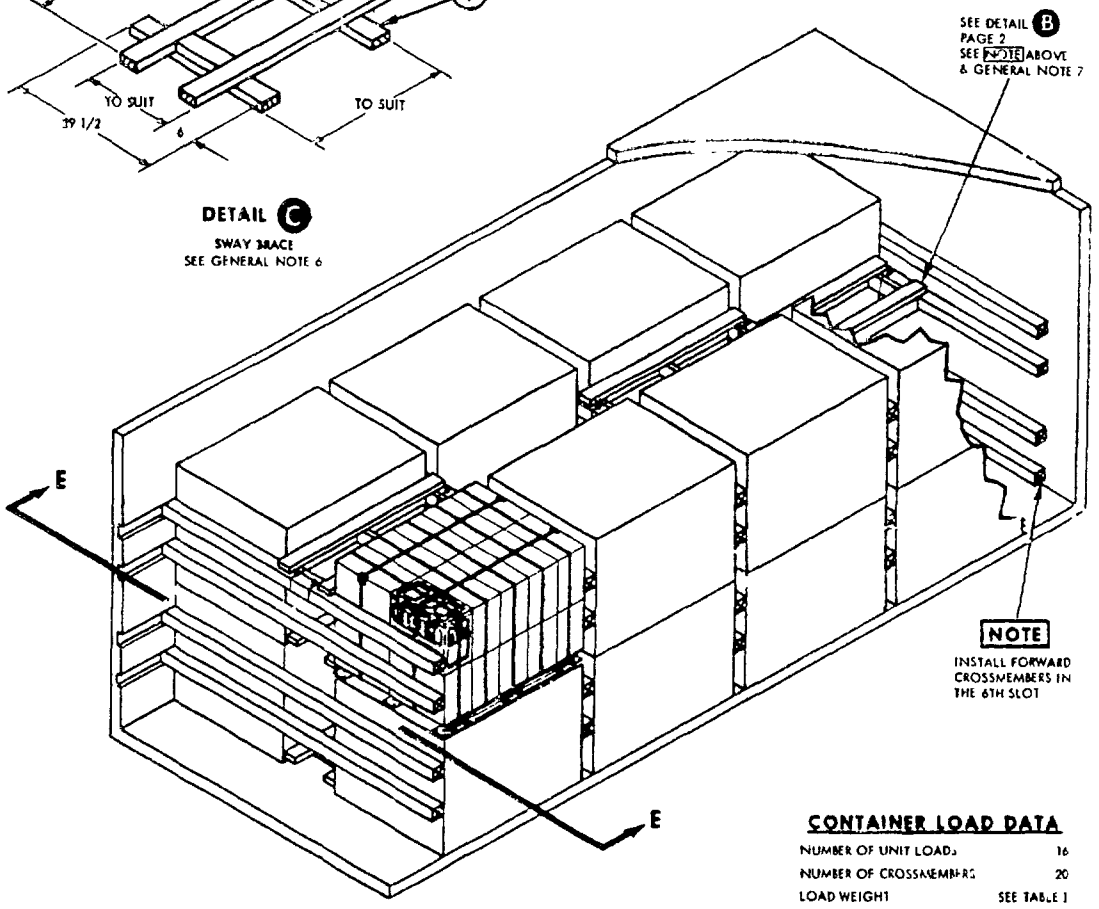

CONTAINER LOAD DATA

NUMBER OF UNIT LOADS	16
NUMBER OF CROSSMEMBERS	20
LOAD WEIGHT	SEE TABLE I
DUNNAGE WEIGHT	213 LBS
CONTAINER WEIGHT	5 785 LBS
GROSS WEIGHT	SEE TABLE I

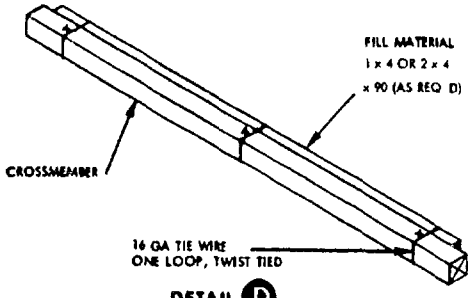

DETAIL D
FILL MATERIAL
SEE GENERAL NOTE 5

PIECE NO	DESCRIPTION	SIZE	NO PCS REQD	NAIL TO	NAILS: NUMBER	NAILS: SIZE
6	SUPPORT	2 x 4 x 52 1/2	8	5	1 PER JOINT	16d
5	STRUT	2 x 4 TO SUIT	12	SEE 4	-	-
4	LONGITUDINAL	2 x 4 x 47	8	5	4	16d
3	SPACER	2 x 4 TO SUIT	16	1	3	10d
2	STRINGER	2 x 4 x 45 1/2	16	1	3 PER JOINT	10d
1	SUPPORT	2 x 4 x 29 1/2	16	SEE 2	-	-

LIST OF MATERIALS AND NAILING DATA


COFC & CONTAINERSHIP (16 UNIT LOADS)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.


TABLE I

FSN & DODIC NOS	WR NO.	NO. OF UNIT LOADS PER CONTAINER	UNIT LOAD WEIGHT (LBS)*	CONTAINER LOAD WEIGHT (LBS)*	CONTAINER GROSS WEIGHT (LBS)*	HAZARD CLASSIFICATION DOT	HAZARD CLASSIFICATION CG	PAGE NUMBER OF STD TO BE USED
1305-028-4548-A769	54/11	* 16	2230	35,680	41,678	A	IV	SEE PAGE 4
1305-028-4547-A770	54/11	16	2230	35,680	41,678	A	IV	SEE PAGE 4
1305-934-8878-A793	54/137	16	2360	37,760	43,758	A	IV	SEE PAGE 4
1305-934-8879-A794	54/137	16	2360	37,760	43,758	A	IV	SEE PAGE 4
1305-934-8880-A795	54/137	16	2360	37,760	43,758	A	IV	SEE PAGE 4
1305-459-4383-A767	54/137	16	2360	37,760	43,758	A	IV	SEE PAGE 4
1305-247-3728-A797	54/137	16	2360	37,760	43,758	A	IV	SEE PAGE 4
1305-028-1151-A765	54/11	14	2730	38,220	44,218	C	I	SEE COFC & CONTAINER SHIP NOTE 2 PAGE 2
1305-516-1125-A765	54/11	11	3330	36,630	42,607	C	I	SEE PAGE 2
1305-516-6598-A776	54/11	11	3370	37,070	43,047	A	IV	SEE PAGE 3
1305-484-1392-A808	54/9	11	3410	37,510	43,487	A	IV	SEE PAGE 3
1305-640-8284-A808	54/9	11	3410	37,510	43,487	A	IV	SEE PAGE 3

*APPROXIMATE

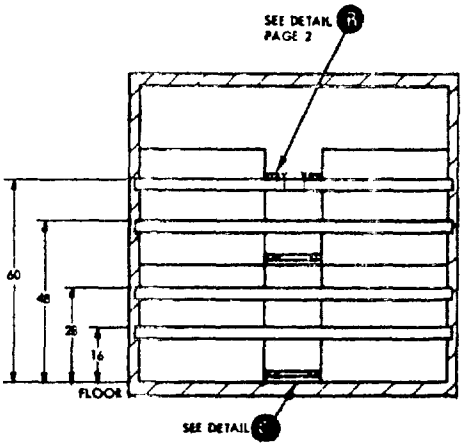

SECTION E-E

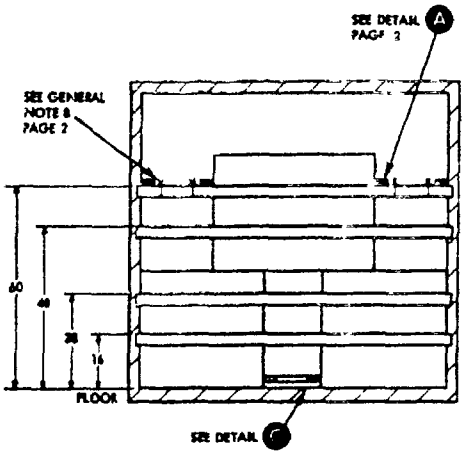

SECTION F-F

REVIEW ACTIVITY
NAVY - OS

PREPARING ACTIVITY:
NAVY - OS
(PROJECT NO. 8140-N709)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.

GENERAL NOTES

1 THIS DOCUMENT GIVES DETAILED INSTRUCTIONS FOR LOADING THE MILVAN CONTAINER WITH FLEET ISSUE UNIT LOADS OF 20 MM CARTRIDGES PACKED IN THE SMALL ARMS AMMUNITION BOX MK 1 MOD 0 THE UNIT LOADS SHALL BE PALLETIZED IN ACCORDANCE WITH WR-54/9, WR-54/11 OR WR-54/137

2 THE MILVAN SHALL BE EQUIPPED WITH A MECHANICAL LOAD-BRACING SYSTEM THAT MEETS THE REQUIREMENTS OF THE BUREAU OF EXPLOSIVES PAMPHLET 6C

3 IN ADDITION TO THE BELT RAILS REQUIRED BY PAMPHLET 6C, THE MILVAN CONTAINER HAS BELT RAILS AT THE 72 AND 83 INCH HEIGHTS FROM THE CONTAINER FLOOR

CAUTION

WHEN POSITIONING CROSSMEMBERS, MAKE A VISUAL CHECK TO ENSURE THAT THE CROSSMEMBERS ARE LOCKED SECURELY IN PLACE

4 CONTAINERS ARE EQUIPPED WITH 25 CROSSMEMBERS UNUSED CROSSMEMBERS MUST REMAIN WITH THE CONTAINERS AND SHALL BE FASTENED INTO THE BELT RAILS FOR SHIPMENT

5 WHEN THE VOID BETWEEN THE CROSSMEMBERS AND THE UNIT LOAD IS GREATER THAN ONE INCH, USE FILL MATERIAL TO SHIM BETWEEN THE CROSSMEMBER AND UNIT LOAD AS SHOWN IN DETAIL D PAGE 4

6 SWAY BRACE, DETAIL C PAGE 4 IS ASSEMBLED PLACE PIECE 1, IS POSITIONED INBOARD OF THE CORNER PALLET POSTS WITH PIECE 2 AGAINST PALLET SKIDS, NAIL TO PIECE 1 WITH THREE 10d NAILS PER JOINT CUT PIECE 3 TO FIT BETWEEN PIECE 1 AND 2 AND NAIL TO PIECE 1 WITH THREE 10d NAILS

7 THE LENGTH OF THE STRUT, PIECE 5 OF DETAIL B, SHALL BE SUFFICIENT TO CAUSE THE BRACE TO FILL THE VOID BETWEEN UNIT LOADS WHEN THE UNIT LOADS ARE AGAINST THE CONTAINER SIDE WALLS TWIST TIE EACH END OF DETAIL B TO CROSSMEMBERS WITH 16 GAUGE SOFT ANNEALED WIRE (2 PLACES)

8 THE SWAY BRACE, DETAIL A, IS USED FOR SHIPMENTS OF ELEVEN UNIT LOADS ONLY THE LENGTH OF THE STRUT, PIECE 8 SHALL BE SUFFICIENT TO CAUSE THE SWAY BRACE TO FILL THE VOID BETWEEN THE UNIT LOAD AND THE CONTAINER SIDE WALL TWIST TIE EACH END OF DETAIL A TO CROSSMEMBERS WITH 16 GAUGE SOFT ANNEALED WIRE (2 PLACES)

9 APPLICABLE MATERIAL SPECIFICATIONS DUNNAGE LUMBER - FED SPEC MM-L-751, NAILS - FED SPEC FF-N-105 TYPE II, STYLE 10, COMMON BRIGHT STRAPPING - FED SPEC QQ-S-781, TYPE I, CLASS A

10 AFTER BLOCKING AND BRACING HAS BEEN INSPECTED ATTACH SHIPPING DOCUMENTS INSIDE THE CONTAINER IN AN ACCESSIBLE AREA CLOSE AND SEAL CONTAINER DOORS ATTACH APPLICABLE PLACARDS TO THE OUTSIDE OF THE CONTAINER FOR THE APPROPRIATE MODE OF TRANSPORTATION AS PRESCRIBED IN OP 2165 (VOL I)


COFC AND CONTAINERSHIP ONLY

1 WHEN SHIPPING FLEET ISSUE UNIT LOADS OF 20 MM CARTRIDGES WR-54/9, WR-54/11 OR WR-54/137 FIRST DETERMINE THE FSN OR DODIC NUMBER FOR THE ITEM TO BE SHIPPED USING THIS NUMBER, ENTER TABLE I AND DETERMINE THE NUMBER OF UNIT LOADS TO BE LOADED INTO THE CONTAINER AND THE PAGE NUMBER OF THE STANDARD TO BE USED LOAD THE CONTAINER ACCORDING TO THESE INSTRUCTIONS


2 WHEN REQUIRED TO SHIP A CONTAINER LOAD OF FSN 1305-028-1451 DODIC NO A-765, ONLY 14 UNIT LOADS ARE SHIPPED FOLLOW THE INSTRUCTIONS FOR LOADING 16 UNIT LOADS AS SHOWN ON PAGE 4 OMITTING THE TWO TOP REAR UNIT LOADS INSTALL A SWAY BRACE, DETAIL B, FOR THE ONE HIGH BAY ON THE 28 INCH HIGH CROSSMEMBERS

WARNING

BECAUSE THE WEIGHT LOADED INTO THIS CONTAINER EXCEEDS 34,000 LBS, THE MILVAN CHASSIS CANNOT BE USED TO TRANSPORT THE LOADED CONTAINER ON PUBLIC HIGHWAYS THE LOADED CONTAINER MAY BE TRANSPORTED OVER DEPOT ROADS USING MILVAN CHASSIS EQUIPPED WITH DOUBLE BOGIES OR COMMERCIAL EQUIPMENT OF APPROPRIATE CAPACITY

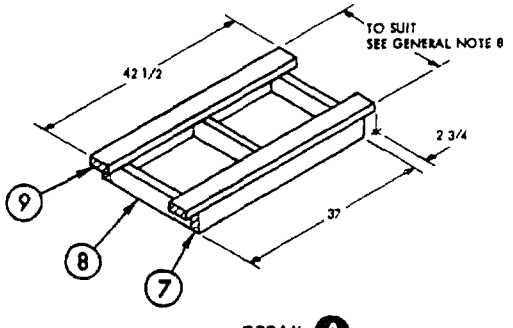

DETAIL A
SWAY BRACE FRAME

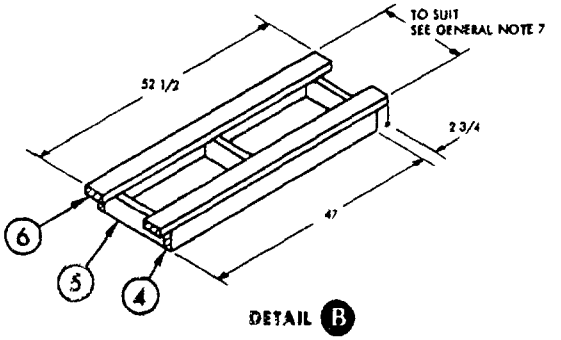

DETAIL B
SWAY BRACE FRAME

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION

MIL-STD-1386-33 (NAVY)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 38 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

S/N 0102-014 1801 C 35264

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

DOD 316

Commanding Officer
Naval Weapons Handling Laboratory
Naval Ammunition Depot Earle
Colts Neck, New Jersey 07722

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:12Z
Check the source to verify that this is the current version before use.