INCH-POUND

A-A-54854
16 April 1993

COMMERCIAL ITEM DESCRIPTION

SUTURE CLIP KIT, AUTOMATIC

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Military Specification MIL-S-36508 which is cancelled.

This Commercial Item Description covers an automatic suture clip kit suitable for effecting rapid automation suturing of the skin following a surgical incision or accidental skin rupture.

Salient characteristics:

General. The suture clip kit shall contain a 5 inch suture removing forceps, a 4-1/2 inch automatic applying-forcep, 9 mm suture clips and a case with an insert having individual cut outs to accommodate the kit components.

Material. The removing forceps and the applying forceps shall be fabricated from class 3, austenitic stainless steel in accordance with ASTM F899. The suture clips shall be fabricated from class 3, type 316 austenitic stainless steel ir accordance with ASTM F899. The clip carrier rack shall be fabricated from 2024 aluminum alloy in accordance with ASTM B211. The case shall be fabricated from a suitable plastic. The case insert shall be fabricated fror plastic polyurethane foam having individual cut-outs to accommodate the items which make up the kit.

Hardness. The removing forceps shall have a Rockwell Hardness (HRC) scale of 43-48 at the nibs and 26-31 for the remainder. The applying forceps shall have a HRC scale of 25-30 The suture clips shall have an HRC scale of 65-70. Hardness shall be tested in accordance with ASTM E18 or E92 whichever is applicable Conversion of hardness values shall be in accordance with ASTM E140.

AMSC N/A FSC 6515
DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

Style, Design, and Dimensions: The suture clip kit shall be in accordance with Figures 1, 2, and 3 for appropriate style, design, and dimensions.

Finish. All components of the suture clip kit shall have a mirror finish. The nibs of the removing forceps shall be sufficiently rough to provide a non-slip finish.

Passivation. The forceps and clips shall be properly passivated.

Corrosion resistance. The forceps and clips shall show no signs of corrosion or plating of copper when tested in accordance with ASTM F1089.

Identification, marking and labeling. The forceps shall be legibly marked with the contractor's name or registered trademark and the word "stainless". Foreign manufactured forceps shall bear the name of the country of origin.

The clips shall be marked in the same manner as the forceps except that these markings shall be applied to the carton.

The case shall be permanently and legibly marked with the name or registered trademark of the contractor and the national stock number.

Workmanship. The suture clip kit shall be free from any defects which detract from its appearance or impair its serviceability.

Unit. Each (EA). One suture clip consisting of one hundred 9 mm clips, one applying forceps and one removing forceps, as specified, constitutes one unit

QUALITY ASSURANCE PROVISIONS.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, and as specified herein. Unit of product for examination shall purposes shall be on forceps. Sampling shall be Inspection level II with and acceptable quality level (AQL) of 1.0.

Examination. Examination shall be conducted to determine compliance with specification requirements.

Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and as specified herein. Unit of product for test purposes shall be one forceps. Sampling shall be Inspection level S-2 with and AQL of 1.0.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Contractor Certification The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements.

Federal Food, Drug, and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction , the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug, and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered material. The offeror/contractor is encouraged to use recovered material in accordance with Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Ordering data. Intermediate/exterior package quantities and labeling and marking must be specified in the contract and/or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

NOTE: The following National Stock Numbers are covered by this document:

NSN	Item Identification
6515-00-782-3923	SUTURE CLIP KIT, AUTOMATIC
which consists of	
6515-00-584-3478	CLIP, SUTURE, 9 mm, 100S.
6515-00-584-3476	FORCEPS, SUTURE CLIP, APPLYING.
6515-00-584-3477	FORCEPS, SUTURE CLIP, REMOVING.

MILITARY INTERESTS:

Custodians:

Army-MD
Navy-MS
Air Force-03

PREPARING ACTIVITY:

DoD-MB

Agent:


DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
USPHS
FDA-MPQAS

Project No. 6515-5096

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

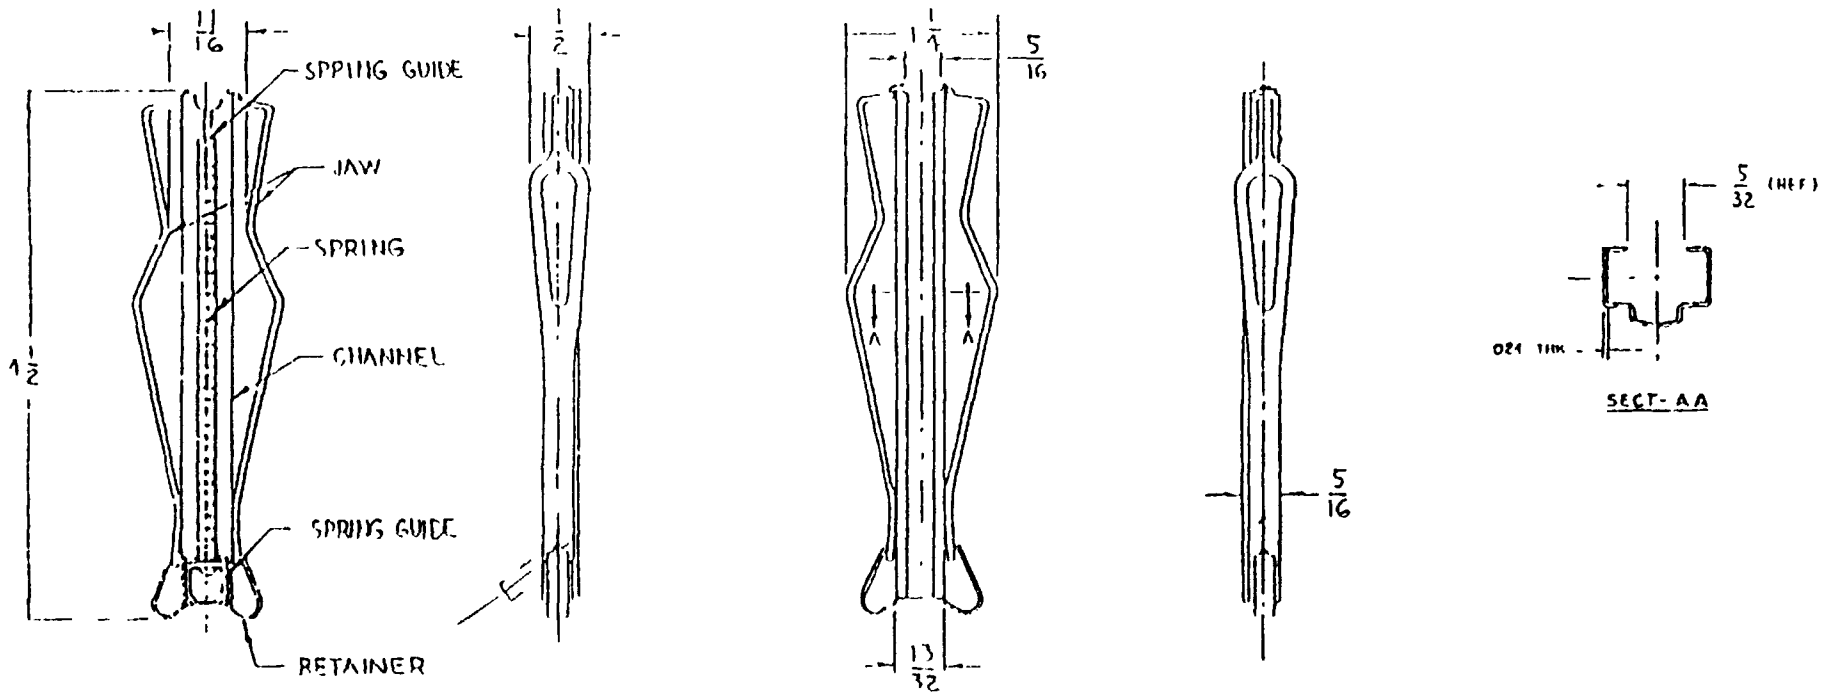


NSN 6515-00-584-3476

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		
TOLERANCES ON		
FRACTIONS	DECIMALS	ANGLES
±1/64	±.005	±

FIGURE 1 FORCEPS, SUTURE CLIP, AUTOMATIC, APPLYING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

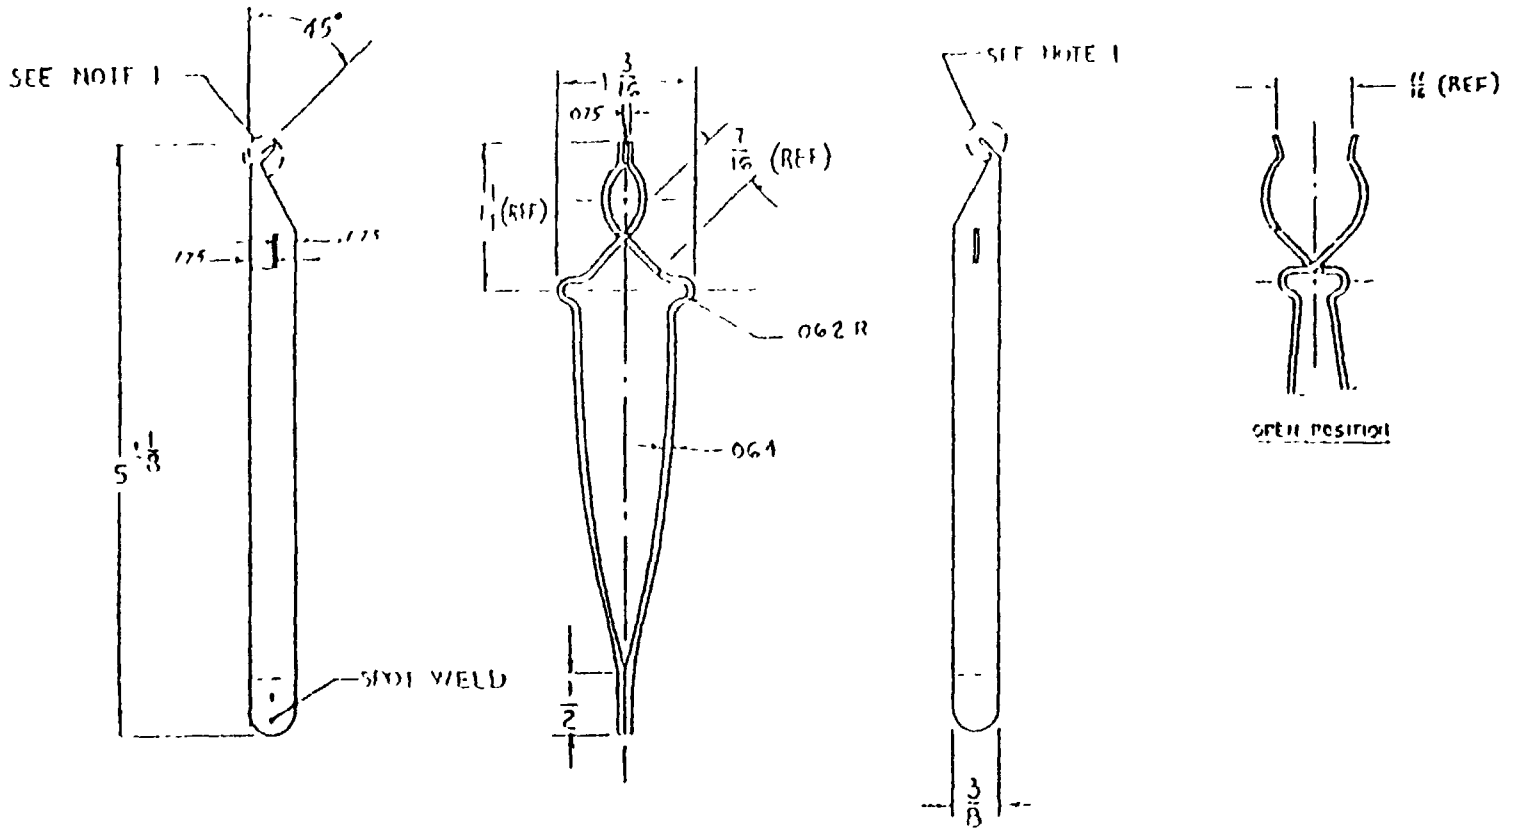

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		
TOLERANCES ON		
FRACTIONS	DECIMALS	ANGLES
±1/64	±.005	± 1°


NOTES:

1. OUTSIDE SURFACES OF NIBS SHALL BE SUFFICIENTLY ROUGH TO PROVIDE A NON-SLIP SURFACE.


NSN 6515-00-584-3477


FIGURE 2 FORCEPS, SUTURE CLIP REMOVING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

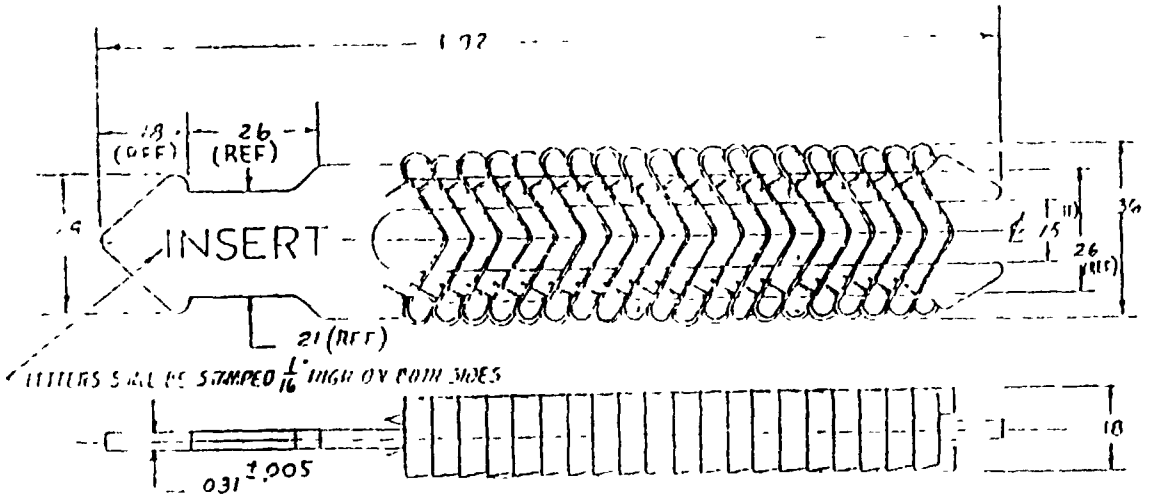

CARRIER PACK (20 SUTURE CLIPS)



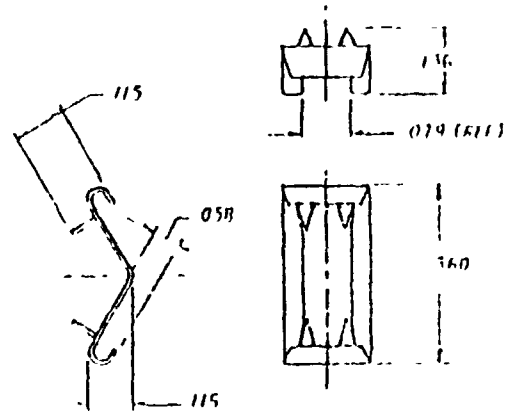

CLIP SUTURE 9MM

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		
TOLERANCES ON		
FRACTIONS	DECIMALS	ANGLES
±	± .015	±

NSN 6515-00-584-3478

FIGURE 3 CLIP, SUTURE - 9 MM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1 The preparing activity must complete blocks 1, 2, 3, and 8 in block 1, both the document number and revision letter should be given

2 The submitter of this form must complete blocks 4, 5, 6, and 7.

3 The preparing activity must provide a reply within 30 days from receipt of the form

NOTE This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

I RECOMMEND A CHANGE:	1 DOCUMENT NUMBER	2 DOCUMENT DATE (YYMMDD)
	A-A-54854	16 April 1993

3 DOCUMENT TITLE

4 NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed)

5 REASON FOR RECOMMENDATION

6 SUBMITTER

a NAME (Last, First, Middle Initial)	b ORGANIZATION	
c ADDRESS (Include Zip Code)	d TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7 DATE SUBMITTED (YYMMDD)

8 PREPARING ACTIVITY

a NAME DPSC-MSE 2800 S. 20th Street	b TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c ADDRESS (Include Zip Code) Philadelphia, PA 19101	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church VA 22041-3466 Telephone (703) 756 2340 AUTOVON 289 2340

DD Form 1426, OCT 89 *Previous editions are obsolete* 198-290

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.