INCH-POUND

A-A-54877
20 May 1993

COMMERCIAL ITEM DESCRIPTION

COMPARATOR, VISCOSITY, OIL

The General Services Administration has authorized the use of this Commercial Item Description as a replacement for Military Specification MIL-C-36346 which is cancelled.

This Commercial Item Description covers one type of pocket comparator, suitable for rapid determination of the viscosity of light oils in Saybolt seconds at 100° Fahrenheit(F).

Salient characteristics:

The viscosity comparator shall be a pocket type, approximately 9 inches long, 1-1/2 inches wide and 1/2 inch in depth and shall be as shown in figure 1. The viscosity comparator shall consist of a master reference tube, a sample tube and a graduated scale. Viscosity shall be read directly from a scale in Saybolt seconds at 100°F.

The reference tube shall be of a clear colorless glass encased in a brass sheath, the sheath being cut away to form a window along the tube, as shown in figure 1. The brass shall be lacquered for protection against corrosion. The tube shall contain an inert oil of 95 viscosity index and a corrosion-resistant steel ball with a smooth surface.

The sample tube shall be of a clear, colorless glass encased in a brass sheath. The sample tube and its sheath shall have the same dimensions as the reference tube. One end of the tube shall have a nozzle and the other end shall be fitted with a gland or other means to form a snug fit with the plunger rod without any leakage. The sample tube shall have a ball similar to the ball in the reference tube.

AMSC N/A FSC 6630

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:39Z
Check the source to verify that this is the current version before use.

The plunger rod shall be fabricated of brass. The plunger rod shall be rigid, smoothly polished and fitted with a handle on the external end. The internal end of the rod shall have a piston fabricated of a material that shall freely and snugly travel in the tube and be chemically inert to the oils under test.

The graduated scale shall run parallel with, and adjacent to the reference and sample. The numerals shall be stamped or etched in clear brass on a black background. The lettering and graduations shall be permanent and distinct and range from 200 to 2000 Saybolt seconds. The scale shall be calibrated in Saybolt seconds at 100°F, from 25 to 200 in increments of 5, from 200 to 300 in increments of 5, from 300 to 400 in increments of 10, from 400 to 700 in increments of 25, from 700 to 1000 in increments of 50, from 1000 to 1200 in increments of 100, and from 1200 to 2000 in increments of 200.

The viscosity comparator shall be supplied with a draft-proof carrying case. The case shall measure approximately 11 inches by 2 inches by 1-1/2 inches. The case shall have appropriate hinges and a holding clasp for the cover. The cover shall have a glass panel, through which the scale of the comparator can be read while performing the test.

The viscosity comparator shall be permanently and legibly marked with the name or registered trademark of the manufacturer.

Each viscosity comparator shall be furnished with instructions and charts for use and maintenance.

Workmanship. The viscosity comparator shall be free from defects which detract from its appearance or impair its serviceability.

Unit. Each (EA). One viscosity comparator, as specified, constitutes one unit.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:39Z
Check the source to verify that this is the current version before use.

OUALITY ASSURANCE PROVISIONS.

Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government upon request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

Inspection. Inspection, as used herein, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105, with an AQL of 2.5 (percent defective) and an inspection level of S-2. The unit of product for examination purposes shall be one viscosity comparator.

Sampling for tests. Sampling for tests (dimensional), shall be conducted in accordance with MIL-STD-105, with an AQL of 2.5 (percent defective) and an inspection level of S-2. The unit of product for test purposes shall be one viscosity comparator.

Tests. Tests shall be conducted to determine compliance with specification requirements. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:39Z
Check the source to verify that this is the current version before use.

Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, providing they fall within the tolerance specified using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this document are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Contractor Certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producers' own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements.

Federal Food, Drug, and Cosmetic Act. If the product covered by this document has been determined by the U.S. Food and Drug Administration to be under its jurisdiction , the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of the Federal Food, Drug, and Cosmetic Act, as amended, and regulations promulgated thereunder. In addition, the offeror/contractor shall comply, and be responsible for compliance by its subcontractors/suppliers, with the requirements of all other applicable Federal, State, and local statutes, ordinances, and regulations.

Recovered material. The offeror/contractor is encouraged to use recovered material in accordance with Federal Acquisition Regulation Subpart 23.4 to the maximum extent practical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

Preservation, packaging, packing, labeling, and marking. Unless otherwise specified, preservation, packaging, and packing shall be to a degree of protection to preclude damage to containers and/or contents thereof under normal shipping conditions, handling, etc., involving shipment from the supply source to the receiving activity, plus reshipment from receiving activity, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior package quantities and labeling and marking shall be as specified in the contract and/or order.

Ordering data. Intermediate/exterior package quantities and labeling and marking must be specified in the contract and/or order.

NOTE: The following National Stock Number is covered by this document:

NSN	Item Identification
6630-00-255-8057	COMPARATOR, VISCOSITY, OIL, 200-2000 Saybolt Seconds.

MILITARY INTERESTS:

Custodians:

Army-MD
Navy-MS
Air Force-03

PREPARING ACTIVITY:

DoD-MB

Agent:

DLA-DM

CIVIL AGENCY COORDINATING ACTIVITIES:

VA-OSS
USPHS
FDA-MPQAS

Project No. 6630-0541

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

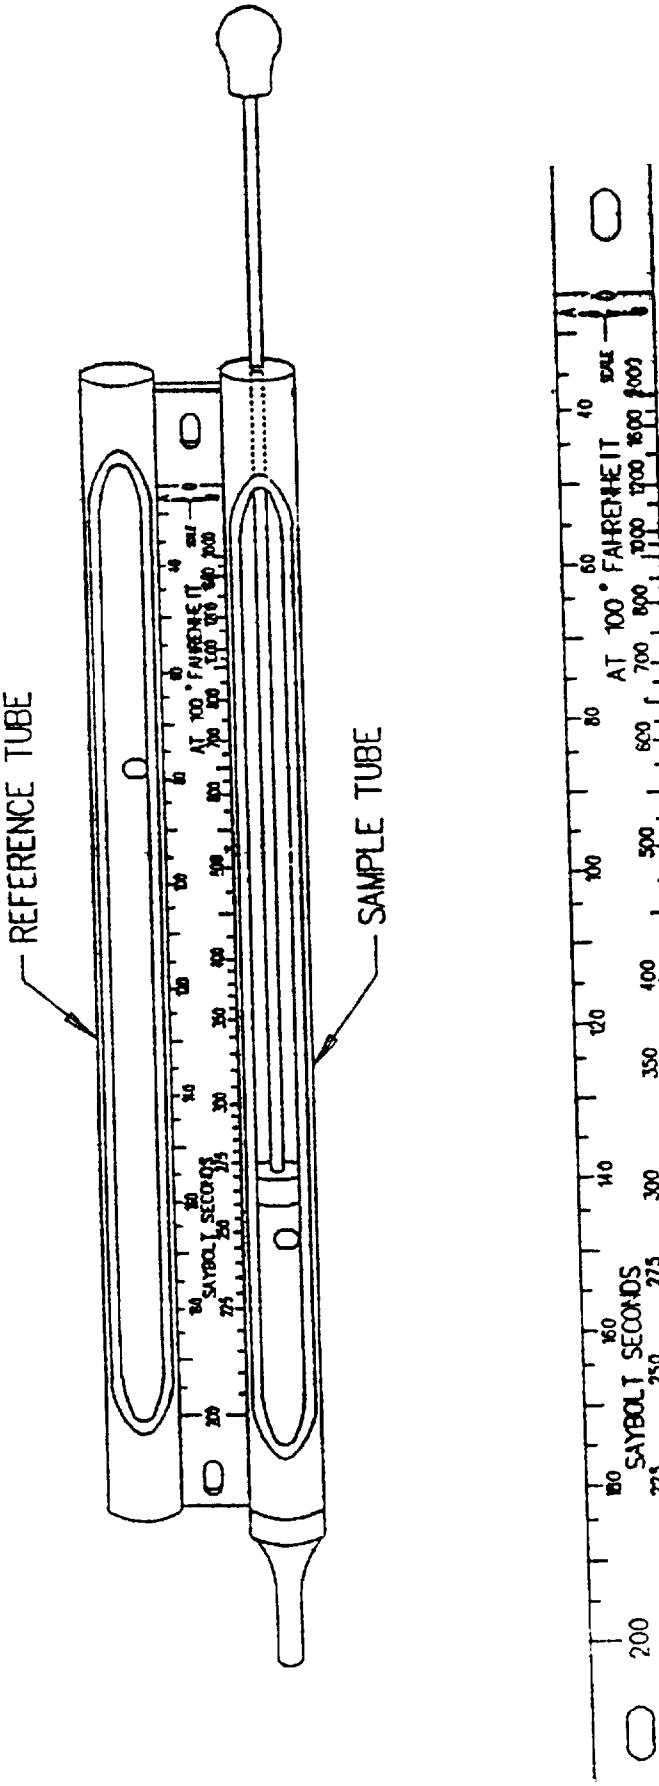


FIGURE 1 VISCOSITY COMPARATOR

NSN 6630-00-255-8057

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1 The preparing activity must complete blocks 1, 2, 3, and 8 In block 1, both the document number and revision letter should be given

2 The submitter of this form must complete blocks 4, 5, 6, and 7.

3 The preparing activity must provide a reply within 30 days from receipt of the form

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

RECOMMEND A CHANGE:

1 DOCUMENT NUMBER: A-A-54877

2 DOCUMENT DATE (YYMMDD): 20 MAY 1993

3 DOCUMENT TITLE: COMPARATOR, VISCOSITY, OIL

4 NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)

b. ORGANIZATION

c. ADDRESS (Include Zip Code)

d. TELEPHONE (Include Area Code)
(1) Commercial
(2) AUTOVON (If applicable)

7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a NAME

b TELEPHONE (Include Area Code)
(1) Commercial (2) AUTOVON

c ADDRESS (Include Zip Code)

IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT
Defense Quality and Standardization Office
5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466
Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 *Previous editions are obsolete* 198-290

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:39Z
Check the source to verify that this is the current version before use.