[INCH-POUND]
A-A-55485/6C
03 October 2022
SUPERSEDING
A-A-55485/6B
7 March 2003

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

MOUNTING PADS, ELECTRICAL-ELECTRONIC COMPONENT, FOR RELAYS AND DISCRETE COMPONENTS

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for MIL-M-38527/6 for all federal agencies.

The complete requirements for procuring the mounting pads described herein shall consist of this document and the issue in effect of A-A-55485.

CLASSIFICATION OR PART IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

A-55485	/06	-001	D
CID Number	CID sheet	Dash number	Material letter

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Mounting pads supplied to this CID specification sheet shall be as specified herein (see figure 1).

Material. Material shall be diallyl phthalate (D) nylon (N), or polyterephthalate thermoplastic (C).

Marking. Not applicable.


NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification section for PIN format examples.

AMSC N/A FSC 5999

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

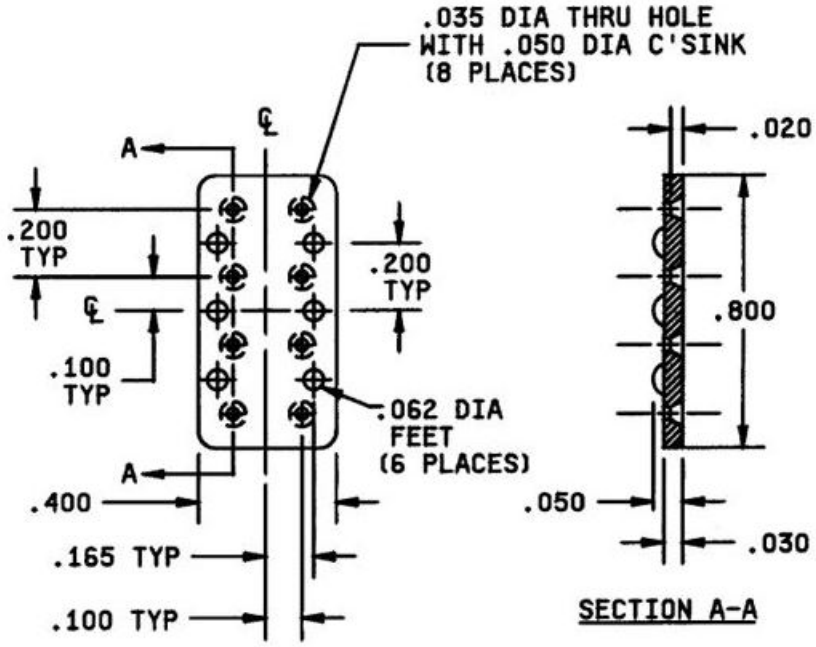


A-55485/06-001

Inches	mm
.005	0.13
.020	0.51
.030	0.76
.035	0.89
.050	1.27
.062	1.57
.100	2.54
.165	4.19
.200	5.08
.400	10.16
.800	20.32

FIGURE 1. Configurations and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

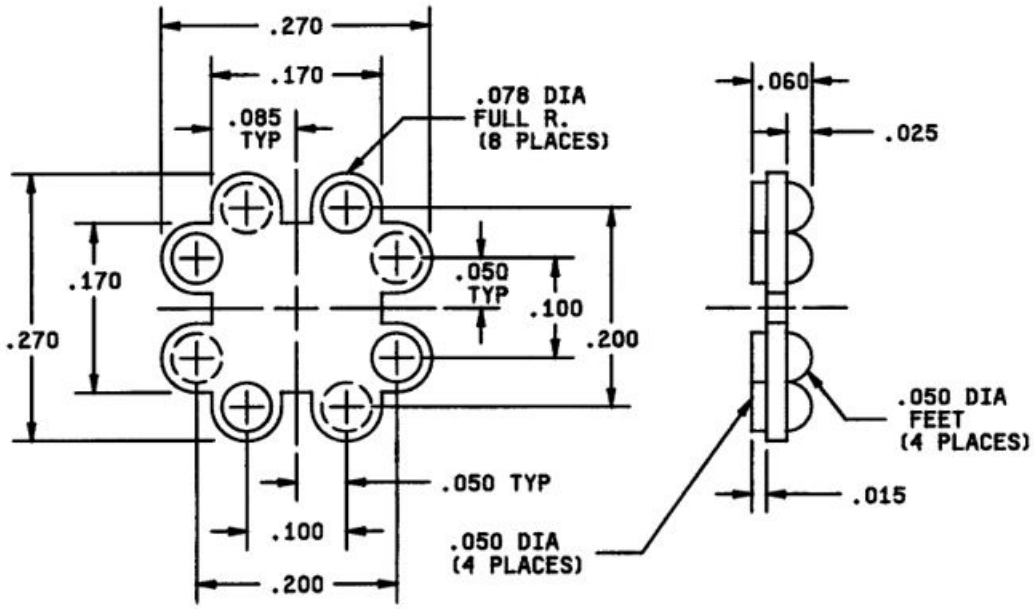


A-55485/06-002

Inches	mm
.015	0.38
.025	0.64
.050	1.27
.060	1.52
.078	1.98
.085	2.16
.100	2.54
.170	4.32
.200	5.08
.270	6.86

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

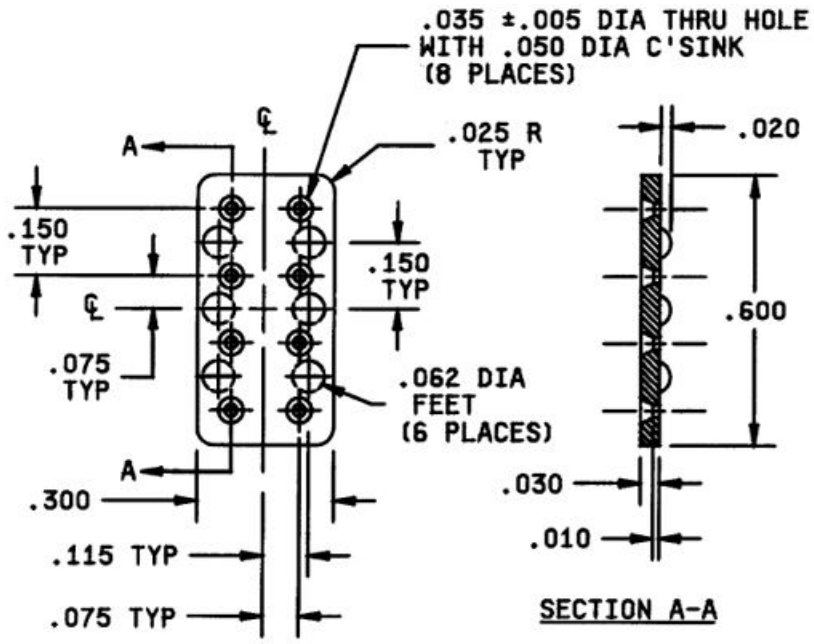


A-55485/06-003

Inches	mm
.005	0.13
.010	0.25
.020	0.51
.025	0.64
.030	0.76
.035	0.89
.050	1.27
.062	1.57
.075	1.90
.115	2.92
.150	3.81
.300	7.62
.600	15.24

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

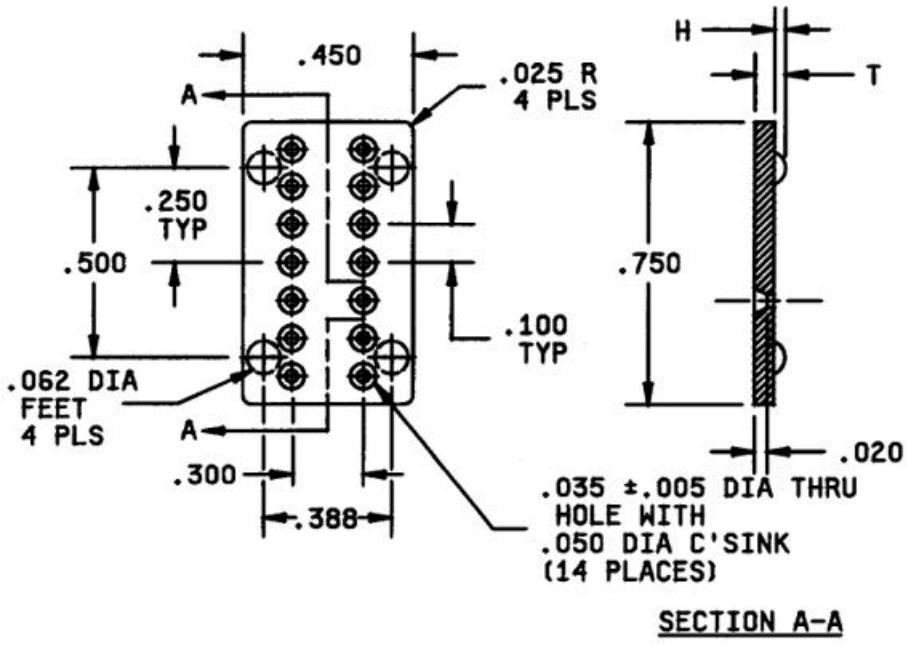


PIN A-55485/06-	H	T
004	no feet	.030 (0.76)
005	.020 Min (0.51)	.065 Max (1.65)
006	.050 (1.27)	.080 (2.03)

Inches	mm
.020	0.38
.025	0.64
.035	1.27
.040	1.52
.062	1.98
.100	2.16
.250	2.54
.300	4.32
.388	5.08
.450	6.86
.750	19.05

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

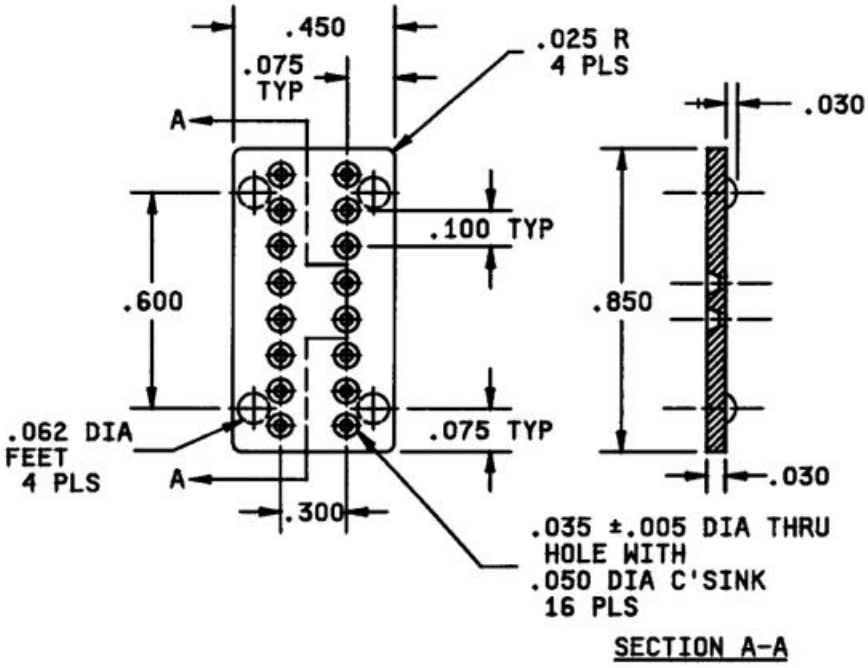


A-55485/06-007

Inches	mm
.025	0.64
.030	0.76
.035	0.89
.050	1.27
.062	1.57
.075	1.91
.100	2.54
.300	7.62
.450	11.43
.600	15.24
.850	21.59

FIGURE 1. Configurations and dimensions - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

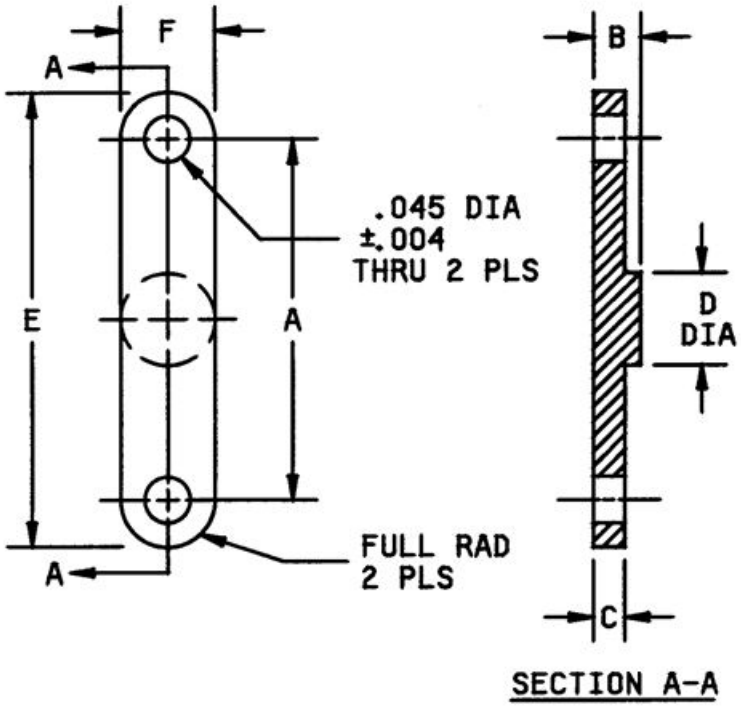

PIN A-55485/06-	A	B	C	D	E	F
008	.100 (2.54)	.045 (1.14)	.022 (.54)	.050/.070 (1.27)(1.78)	.180 (4.57)	.090 (2.29)
009	.150 (3.81)	.045 (1.14)	.022 (.54)	.090/.125 (2.29)(3.18)	.270 (6.86)	.125 (3.18)
010	.200 (5.08)	.045 (1.14)	.022 (.54)	.090 (2.29)	.290 (7.37)	.090 (2.89)
017	.250 (6.36)	.045 (1.14)	.026 (.82)	.090 (2.29)	.340 (8.89)	.090 (2.29)
018	.300 (7.62)	.045 (1.14)	.026 (.82)	.140 (3.81)	.390 (9.91)	.090 (2.29)
019	.350 (8.90)	.045 (1.14)	.030 (.76)	.140 (3.81)	.440 (11.18)	.090 (2.29)
020	.400 (10.16)	.045 (1.14)	.030 (.76)	.190 (4.82)	.490 (12.45)	.090 (2.29)
021	.500 (12.7)	.045 (1.14)	.030 (.76)	.190 (4.82)	.590 (14.99)	.090 (2.29)


FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

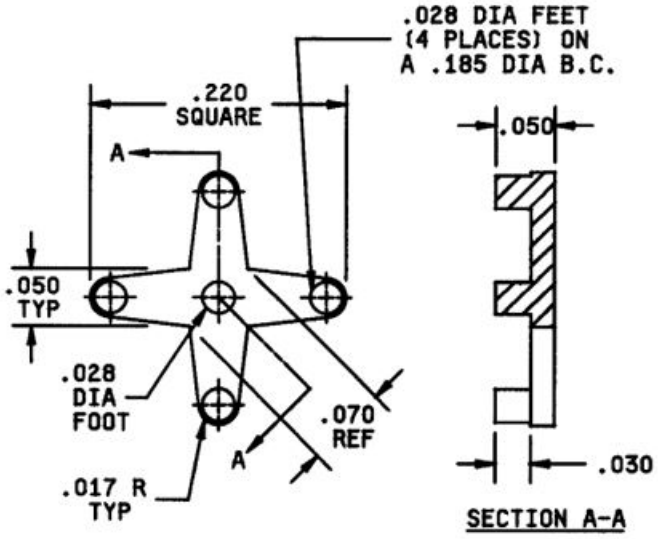

Inches	mm
.017	0.43
.028	0.71
.030	0.76
.050	1.27
.070	1.78
.185	4.70
.220	5.59

A-55485/06-011

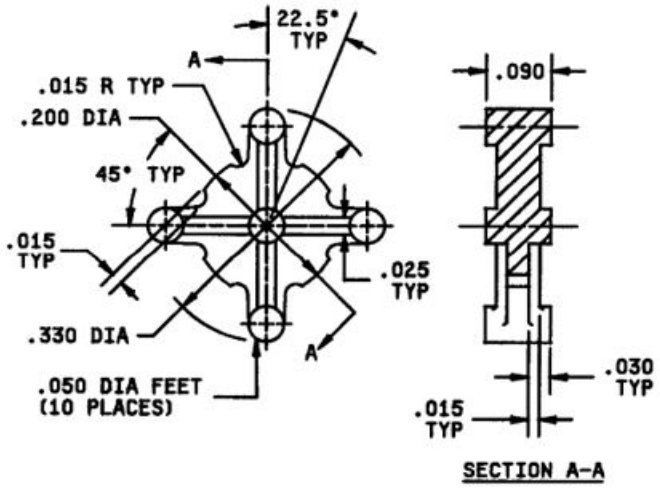


Inches	mm
.015	0.38
.025	0.64
.030	0.76
.050	1.27
.090	2.29
.200	5.08
.330	8.38

A-55485/06-012


FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

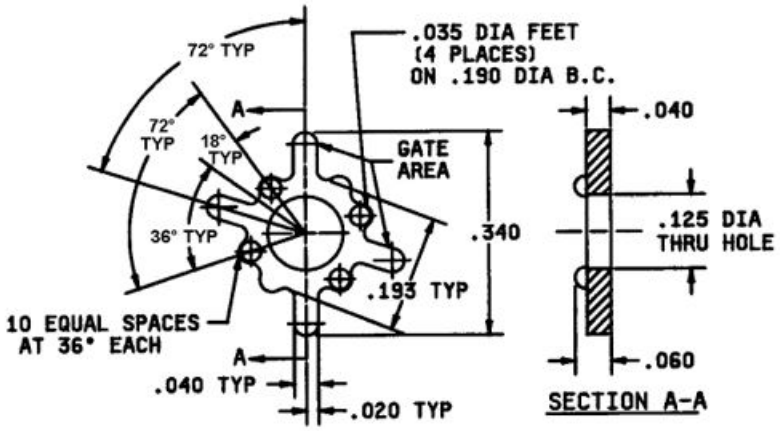

Inches	mm
.020	0.51
.035	0.89
.040	1.02
.060	1.52
.125	3.18
.190	4.83
193	4.90
.340	8.64

A-55485/06-013

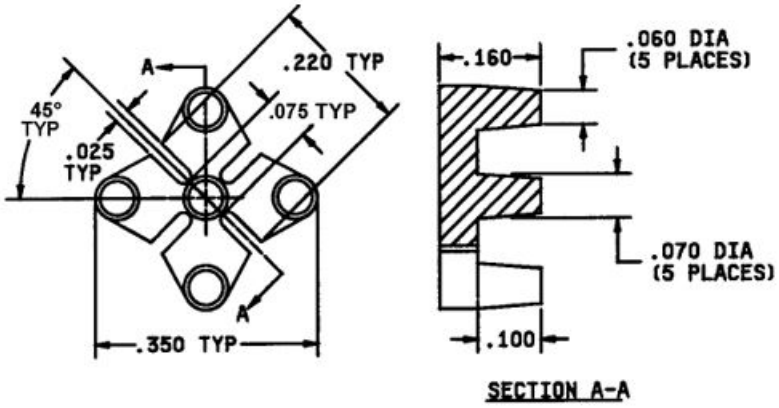


Inches	mm
.025	0.64
.060	1.52
.070	1.78
.075	1.91
.100	2.54
.160	4.06
.220	5.59
.350	8.89

A-55485/06-014


FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

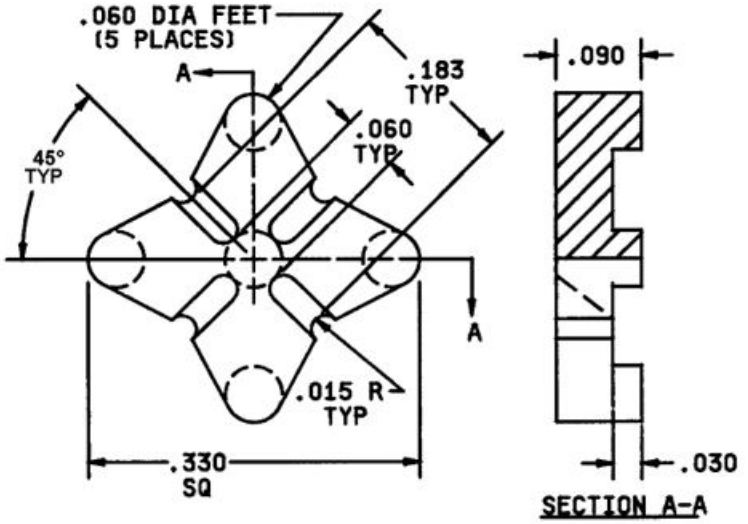

Inches	mm
.015	0.38
.030	0.76
.060	1.52
.090	2.29
.183	4.65
.330	8.38

A-55485/06-015

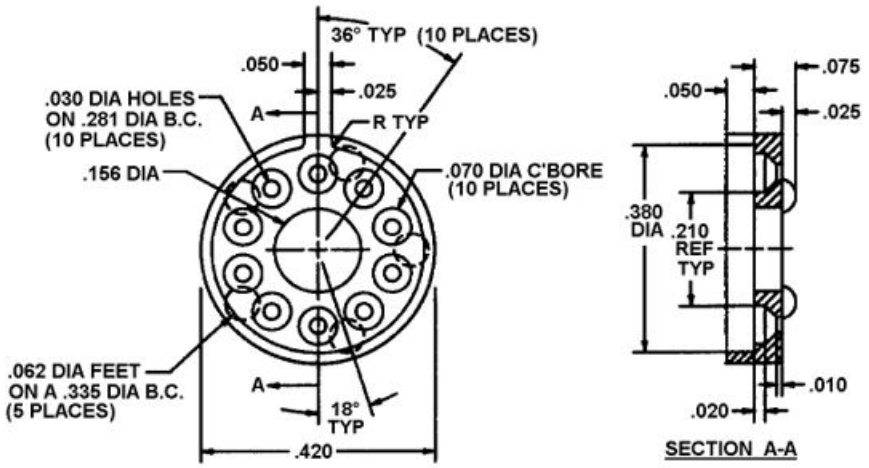


Inches	mm
.010	0.25
.020	0.51
.025	0.64
.030	0.76
.050	1.27
.062	1.57
.070	1.77
.156	3.96
.210	5.33
.281	7.14

A-55485/06-016

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

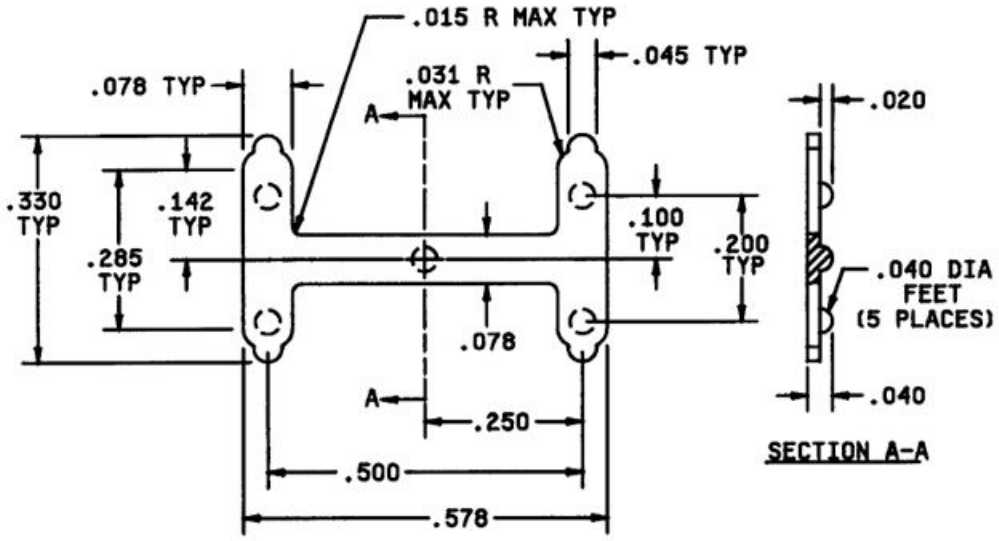


A-55485/06-022

Inches	mm
.015	0.38
.020	0.51
.031	0.71
.040	1.02
.045	1.14
.078	1.98
.100	2.54
.142	3.61
.200	5.08
.250	6.35
.285	7.24
.330	8.38
.500	12.70
.578	14.60

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

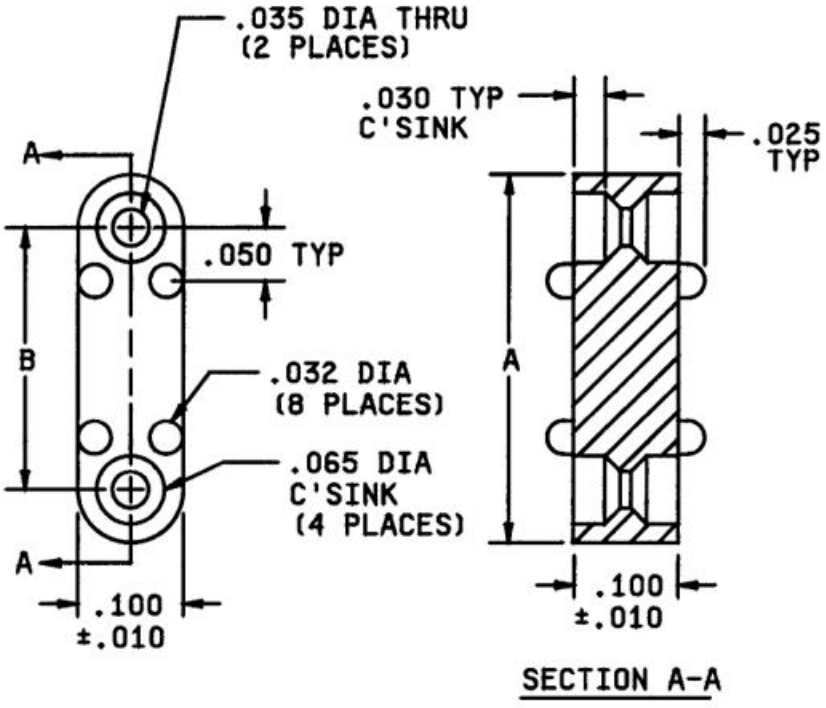


Inches	mm
.025	0.64
.030	0.76
.032	0.81
.035	0.89
.050	1.27
.065	1.65
.100	2.54

PIN A-55485/06-	A	B	PIN A-55485/06-	A	B
023	.300 (7.62)	.200 (5.08)	026	.450 (11.43)	.350 (8.89)
024	.350 (8.89)	.250 (6.35)	027	.500 (12.70)	.400 (10.16)
025	.400 (10.16)	.300 (7.62)	028	.600 (15.24)	.500 (12.70)


FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

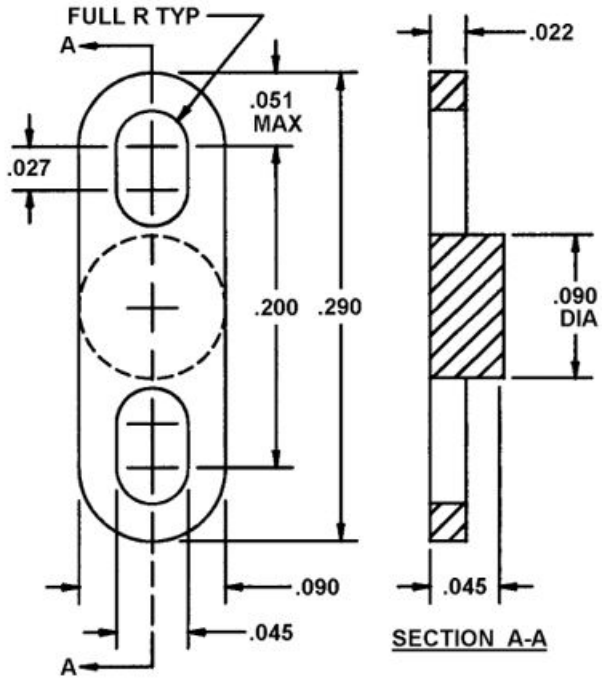

Inches	mm
.022	0.56
.027	0.69
.045	1.14
.051	1.30
.090	2.29
.200	5.08
.290	7.37

A-55485/06-043

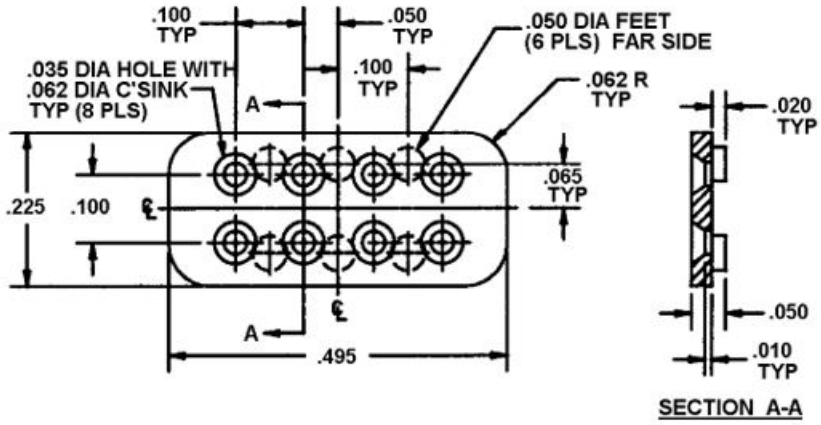


Inches	mm
.010	0.25
.020	0.51
.035	0.89
.050	1.27
.062	1.57
.065	1.65
.100	2.54
.495	12.57

A-55485/06-044


FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

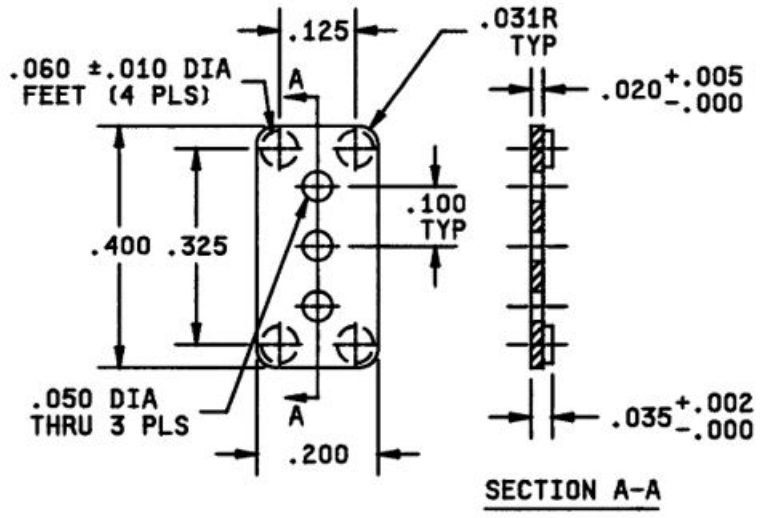

Inches	mm
.002	0.05
.005	0.13
.020	0.51
.031	0.79
.035	0.89
.050	1.27
.060	1.52
.100	2.54
.125	3.18
.200	5.08
.325	8.26
.400	10.16

A-55485/06-045

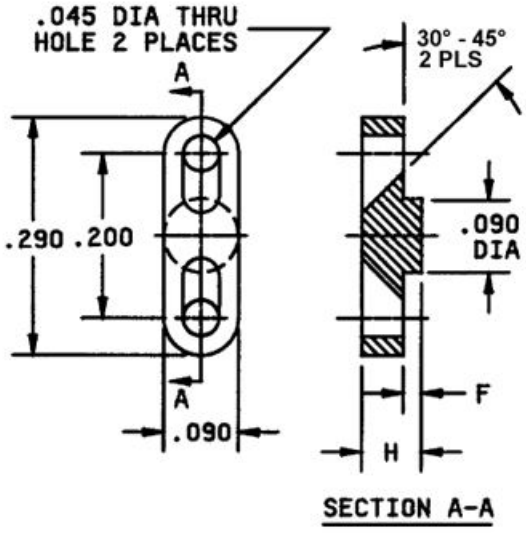


Inches	mm
.022	0.56
.035	0.89
.045	1.14
.050	1.27
.072	1.83
.085	2.16
.090	2.29
.200	5.08
.290	7.37

PIN A55485/06-	H	F
046	.072	.022
047	.050	.000
048	.085	.035

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

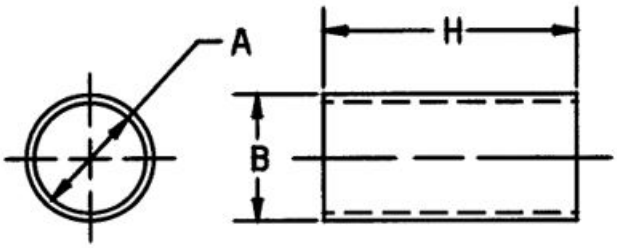

PIN 1/ A55485/06	Dimension			PIN 1/ A55485/06	Dimension		
	"A" ±.005 (0.13 mm)	"B" ±.005 (0.13 mm)	"H" 1/ 2/		"A" ±.005 (0.13 mm)	"B" ±.005 (0.13 mm)	"H"
A	.028 (0.71)	.085 (2.16)	.030 - 1.250 (0.76)(-(31.75)	H	.063 (1.60)	.187 (4.75)	.030 - 1.250 (0.76)(-(31.75)
B	.032 (0.81)	.085 (2.16)	.030 - 1.250 (0.76)(-(31.75)	J	.091 (2.31)	.187 (4.75)	.030 - 1.250 (0.76)(-(31.75)
C	.032 (0.81)	.125 (3.18)	.030 - 1.250 (0.76)(-(31.75)	K	.120 (3.05)	.187 (4.75)	.030 - 1.250 (0.76)(-(31.75)
D	.047 (1.19)	.125 (3.18)	.030 - 1.250 (0.76)(-(31.75)	L	.091 (2.31)	.250 (6.35)	.030 - 1.250 (0.76)(-(31.75)
E	.085 (2.16)	.148 (3.76)	.030 - 1.250 (0.76)(-(31.75)	M	.115 (2.92)	.250 (6.35)	.030 - 1.250 (0.76)(-(31.75)
F	.047 (1.19)	.156 (3.96)	.030 - 1.250 (0.76)(-(31.75)	N	.147 (3.73)	.250 (6.35)	.030 - 1.250 (0.76)(-(31.75)
G	.105 (2.67)	.167 (4.24)	.030 - 1.250 (0.76)(-(31.75)	P	.171 (4.34)	.250 (6.35)	.030 - 1.250 (0.76)(-(31.75)

1/ Cylindric standoffs have a unique PIN format which must be used when ordering. A letter (A through P in the first column above) is keyed to the desired "A" and "B" dimensions and is used as the basic dash number. The desired "H" dimension (from .030 to 1.250 in.005 inch increments) is then called out using a four-digit number (no decimals). For example, a desired "H" dimension of .030 inch would be shown in the PIN as 0030. A desired "H" dimension of 1.005 inch would be shown in the PIN as 1005. An "H" dimension of 1.250 inch would be shown in the PIN as 1250. The final digit of the PIN shall be a letter (D, N, or C) to denote the desired material. Complete PIN examples: A55485/06B0085D; A55485/06F0935N; A55485/06P1225C.

2/ The following tolerances apply to dimension H:

.030 (0.76 mm) to .500 (12.70 mm): ±.005 (0.13 mm).
.505 (12.83 mm) to .750 (19.05 mm): ±.008 (0.20 mm).
.755 (19.18 mm) to 1.250 (31.75 mm): ±.015 (0.38 mm).

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on height of pads shall be ±.015 (0.38 mm), unless otherwise specified.
4. Tolerances are ±.010 (0.25 mm) for decimals and ±1° on angles, unless otherwise specified.
5. A .010 (0.25 mm) radius is permissible on corners and edges and a 1° draft is permitted on sides.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE I. Supersession data.

Superseded PIN in accordance with MIL-M-38527/6D M38527/06-	Replacement CID PIN in accordance with A-A-55485/6, dated September 30, 1993: A-55485/06-	2/ PIN changes in accordance with A-A-55475.6A dated June 1, 1995
001	001	
002	002	
003	003	
004	004	
005	005	
006	006	
007	007	
008	008	
009	009	
010	010	
011	011	
012	012	
013	013	
014	014	
015	015	
016	016	
017	017	
018	018	
019	019	
020	020	
021	021	
022	022	
023	023	
024	024	
025	025	
026	026	
027	027	
028	028	
029	029	A55485/06A
030	030	A55485/06B
031	031	A55485/06C
032	032	A55485/06D
033	033	A55485/06E
034	034	A55485/06F
035	035	A55485/06G
036	036	A55485/06H
037	037	A55485/06J
038	038	A55485/06K
039	039	A55485/06L
040	040	A55485/06M
041	041	A55485/06N
042	042	A55485/06P
043	043	
044	044	
045	045	
046	046	
047	047	
048	048	

1/ All PIN's shall include a suffix letter (D, N, or C) to denote the material. The suffix letters in MIL-M-38527 and A-A55485 are identical.

2/ New PIN's for superseded dash numbers -029 through -042 shall include a 4-digit "H" dimension callout (see figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Suggested sources of supply. 1/

2/ CID PIN (see figure 1) A-55485/06-	Vendor commercial PIN 3/ CAGE code 0ZK84
001D	10105D
001N	10105N
001C	
002D	10511D
002N	10511N
002C	
003D	10537D
003N	10537N
003C	
004D	10557D
004N	10557N
004C	
005D	10558D
005N	10558N
005C	
006D	10559D
006N	10559N
006C	
007D	10560D
007N	10560N
007C	
008D	10561D
008N	10561N
008C	
009D	10562D
009N	10562N
009C	
010D	10563D
010N	10563N
010C	
011D	10259D
011N	10259N
011C	
012D	10134D
012N	10134N
012C	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Suggested sources of supply - Continued. 1/

2/	Vendor commercial PIN 3/
CID PIN (see figure 1) A-55485/06-	CAGE code 0ZK84
013D	10010D
013N	10010N
013C	
014D	10265D
014N	10265N
014C	
015D	10269D
015N	10269N
015C	
016D	10235D
016N	10235N
016C	
017D	10581D
017N	10581N
017C	
018D	10582D
018N	10582N
018C	
019D	10583D
019N	10583N
019C	
020D	10584D
020N	10584N
020C	
021D	10585D
021N	10585N
021C	
022D	10634D
022N	10634N
022C	
023D	10630D
023N	
023C	
024D	10586D
024N	10586N
024C	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Suggested sources of supply - Continued. 1/

CID PIN (see figure 1) A-55485/06- 2/	Vendor commercial PIN 3/ CAGE code 0ZK84
025D	10656D
025N	10656N
025C	
026D	10587D
026N	10587N
026C	
027D	10639D
027N	10639N
027C	
028D	10636D
028N	10636N
028C	
A55485/06AXXXXD	10610D
A55485/06AXXXXN	10610N
A55485/06AXXXXC	
A55485/06BXXXXD	10611D
A55485/06BXXXXN	10611N
A55485/06BXXXXC	
A55485/06CXXXXD	10645D
A55485/06CXXXXN	10645N
A55485/06CXXXXC	
A55485/06DXXXXD	10637D
A55485/06DXXXXN	10637N
A55485/06DXXXXC	
A55485/06EXXXXD	10640D
A55485/06EXXXXN	10640N
A55485/06EXXXXC	
A55485/06FXXXXD	10612D
A55485/06FXXXXN	10612N
A55485/06FXXXXC	
A55485/06GXXXXD	10613D
A55485/06GXXXXN	10613N
A55485/06GXXXXC	
A55485/06HXXXXD	10646D
A55485/06HXXXXN	10646N
A55485/06HXXXXC	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

TABLE II. Suggested sources of supply - Continued. 1/

CID PIN (see figure 1) A-55485/06- 2/	Vendor commercial PIN 3/ CAGE code 0ZK84
A55485/06JXXXD	10647D
A55485/06JXXXN	10647N
A55485/06JXXXC	
A55485/06KXXXD	10644D
A55485/06KXXXN	10644N
A55485/06KXXXC	
A55485/06LXXXD	10648D
A55485/06LXXXN	10648N
A55485/06LXXXC	
A55485/06MXXXD	10594D
A55485/06MXXXN	10594N
A55485/06MXXXC	
A55485/06NXXXD	10649D
A55485/06NXXXN	10649N
A55485/06NXXXC	
A55485/06PXXXD	10650D
A55485/06PXXXN	10650N
A55485/06PXXXC	
043D	10619D
043N	10619N
043C	
044D	10275D
044N	10275N
044C	
045D	10381D
045N	10381N
045C	
046D	10580D
046N	10580N
046C	
047D	10602D
047N	10602N
047C	
048D	10603D
048N	10603N
048C	

1/ This table is not a qualified products list or an approved source list. The vendors listed have submitted Certificates of Compliance (see A-A-55485) to DSCC-VAT; however, parts may be ordered from any manufacturer who agrees to supply products that meet all the requirements of this CID.
2/ XXXX in the PIN represents the “H” dimension in figure 1 (cylindric-shaped standoffs only).
3/ Vendor commercial PIN’s are given for reference only. Do not use these numbers for ordering purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.

NOTES.

Commercial products. As part of the market analysis and research effort, this CID was coordinated with the following manufacturers of commercial products. At the time of CID preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
0ZK84	Micro Dimensional Products, Inc 199 W. Spruce Street Norristown, PA 19401-3863 (610) 239-7940 https://www.microdimensional.com

Changes from previous issue. The margins of this CID specification sheet are marked with a vertical line to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

MILITARY INTERESTS:

Custodians:
Army - CR
Navy – EC
Air Force - 85
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FAS

Preparing activity:

DLA - CC

Project 5999-2022-006

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:48Z
Check the source to verify that this is the current version before use.