A-A-1284
May 16, 1984

COMMERCIAL ITEM DESCRIPTION

HAMMER, HAND, MAUL, SPIKE (RAILROAD)


The General Services Services Administration has authorized the use of this commercial item description in preference to Type XIII of Federal Specification GGG-H-86.

Salient Characteristics:

Conform to ANSI B173.3 and requirement stated herein.

Finish. Polished striking face/protective coating of the entire head to deter rusting.

Handle. Fiberglass

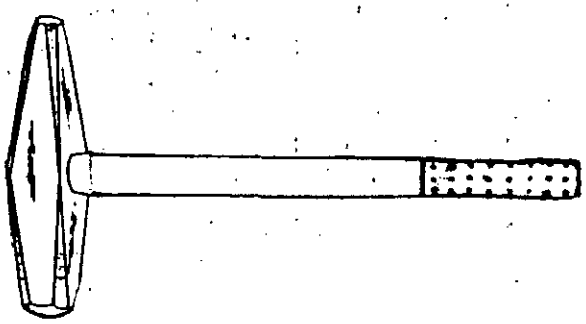

(Figure is illustrative and not restrictive)

Hammer, Hand, Maul, Spike (Railroad)

Nominal Head Weight Pounds	Handle Length Overall +4/-1/2 Inches	National Stock Number
10	32	5120-00-900-7172

Marking. Hammers shall be legibly marked with the manufacturer's name or trademark. The country of origin shall be marked on each hammer.

Workmanship. All hammers shall be free from imperfections which may affect their safety, appearance, serviceability, or durability.

The issue of ANSI B173.3 in effect on date of the solicitation shall apply.

FSC 5120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Test:

Handgrip Test. Hammers with handgrips shall be subject to this test. Each sample shall be conditioned climatically to 30 degrees F, plus or minus 2 degrees F, and remain at this temperature for 1 hour or until thermal stabilization has occurred. The sample shall then be cycled to plus 120 degrees F, plus or minus 2 degrees F, and remain at this temperature for 1 hour or until thermal stabilization has occurred. The sample shall then be conditioned to plus 70 degrees F, plus or minus 10 degrees F (room ambient temperature).

The pull test force is to be as noted below, except, that for certain sizes where the handgrip pull test force is found to be greater than the pull-apart force (tensile force). In this instance the handgrips shall be subjected to the head pull-apart force (tensile force) and a maximum in lieu of the specified force.

Grips which loosen or separate from the handle shall be cause for rejection.

After application of the pull test, the hammers shall be held by the head, and the grip twisted at the normal handgrip position by hand in alternating directions with a torque as noted in the Table below. Five complete twisting cycles shall be performed, after which there shall be no grip looseness or separation from the handle.

HAMMERHEAD WEIGHT	PULL TEST FORCE	TORQUE TEST
Less than 16 oz.	500 lbs.	40 in-lbs.
16 oz. and over	700 lbs.	50 in-lbs.

Crack Detection Test. All samples shall be 100 percent inspected and shall be subjected to either a wet magnetic - particle inspection test as described in ASTM E-709-80 or an Ultrascope detection test described in ASTM E-114.75. All surfaces shall be examined. Any hammer exhibiting surface crack indications in any location, may have that indication removed by minor rework. The lot shall be rejected if upon Government acceptance testing any crack indications are found.

Fiberglass Handle Overstrike Test. Hammers with fiberglass handles shall withstand twenty three full swinging overstrike blows by an average built man (160 to 180 pounds), commensurate with the end use and weight of the hammer. The blows shallbe against that portion of the handle directly behind the head and on a substantially supported steel object having a minimum 3/8 inch fullradius.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

Fiberglass Bending Moment Test: Hammers with fiberglass handles shall be subjected to this test in lieu of the static force test found in ANSI B173.3. Samples of the assembled striking tool shall not break, chip, or crack when subjected to a load of 275 pounds at a distance of 30 inches (measured from the top of the tool head). The striking tool head shall be locked securely in the test fixture with the striking face down and with the handle extended in the horizontal plane. The load shall be applied gradually and in a vertical direction.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

ANSI Standards are available from American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.

MILITARY INTEREST:

Custodian

Air Force - 99
Army - GL
Navy - SH

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.

A-A-1090
CANCELLATION
August 16, 1984

COMMERCIAL ITEM DESCRIPTION

SAW, CHAIN, PORTABLE, POWER (GASOLINE POWERED, LIGHT WEIGHT, 14" CUTTING CAPACITY)

This cancellation is approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration.

Commercial Item Description A-A-1089, dated June 16, 1980, is hereby cancelled without replacement.

FSC 3695

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:13Z
Check the source to verify that this is the current version before use.