A-A-310B
September 16, 1986
SUPERSEDING
A-A-310A
December 18, 1980

COMMERCIAL ITEM DESCRIPTION

BAG, WASTE RECEPTACLE (PAPER)

The General Services Administration has authorized the use of this commercial item description in preference to Federal Specification UU-B-43, type I.

This description covers square waxed paper bags suitable for use in sanitary waste receptacles, 3-gallon size, for the disposal of garbage, refuse, and infectious waste.

Salient characteristics.

The paper used in the fabrication of the bag shall be unbleached wood fibers. The unwaxed paper shall be sized to the extent that one drop of water (0.1 cubic centimeter) will not be completely absorbed into the paper when tested as follows: After conditioning to equilibrium at room temperature, the specimen shall be placed on a flat dry and clean surface. A drop of water (approximately 0.1 cubic centimeter) shall be dropped on the specimen from a height of not more than 3 inches above the specimen. A watch glass shall be placed over the paper. After 20 minutes the area of the paper contacted by the drop shall show partial retention of the drop as evidenced by reflectivity.

The wax used shall have a melting point of not less than 120 F° nor more than 134 F°. The physical characteristics of the bag shall conform to the following:

Characteristics	Requirements	Test Method
Paper, unwaxed		
Basis weight (24 x 36 -500)	35 pounds ± 5 percent	TAPPI 410
Paper, waxed		
Bursting strength	18 points, average, min.	TAPPI 403
Tear resistance, MD	50 grams, average, min.	TAPPI 414
Wax content (24 x 36 -500)	Not less than four pounds of paraffin wax	TAPPI 405

The issue of each TAPPI test method in effect on the date of the solicitation shall be used to determine compliance with these requirements.

FSC 8105

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:06Z
Check the source to verify that this is the current version before use.

The bag shall be constructed so that the face with lip, bottom and center seams or overlaps shall be to the rear. Seams and overlaps shall be sealed securely throughout their area and shall be glued with a strong-moistureproof adhesive.

The adhesive used in the construction of the bags shall be moisture-proof. The adhesive shall be tested, as follows: Two sections of the glued seam of the bag, at least 3-inches long and of such width that there shall be at least 1-inch of material on each side of the finished seam, shall be taken from each bag. Each section shall be completely immersed in water at room temperature for a period of not less than 6 hours. At the end of that time, the bag seams shall be peeled without fiber separation of the paper.

Dimensions. The bag dimensions ± 1/4 inch shall be, as follows: face width - 8 inches; tuck width - 7-3/4 inches; bag length - 17-1/8 inches. (See figure for bag style and method of measuring.)

Workmanship. Bag shall be uniformly constructed, free from holes, tears, cuts, splits, or other defects which might impair their usefulness.

Examination of the end item for defects in dimensions, construction, and workmanship. The sample unit for this examination shall be one bag. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 expressed in terms of percent defective in accordance with MIL-STD-105.

Inspection for test requirements. A composite sample of 13 bags shall be randomly selected from each lot. The lot shall be rejected for any failure to meet the paper requirement, wax content and adhesion.

Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of composition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:06Z
Check the source to verify that this is the currentversion before use.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.


Note. THE COMMERCIAL ITEM DESCRIPTION CLAUSE IS NOT REQUIRED WHEN THIS COMMERCIAL ITEM DESCRIPTION IS USED FOR PROCUREMENT.

TAPPI test method is available from the Technical Association of the Pulp and Paper Industry, Technology Park/Atlanta, P. O. Box 105113, Atlanta, GA 30348.

PREPARING ACTIVITY

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:06Z
Check the source to verify that this is the current version before use.

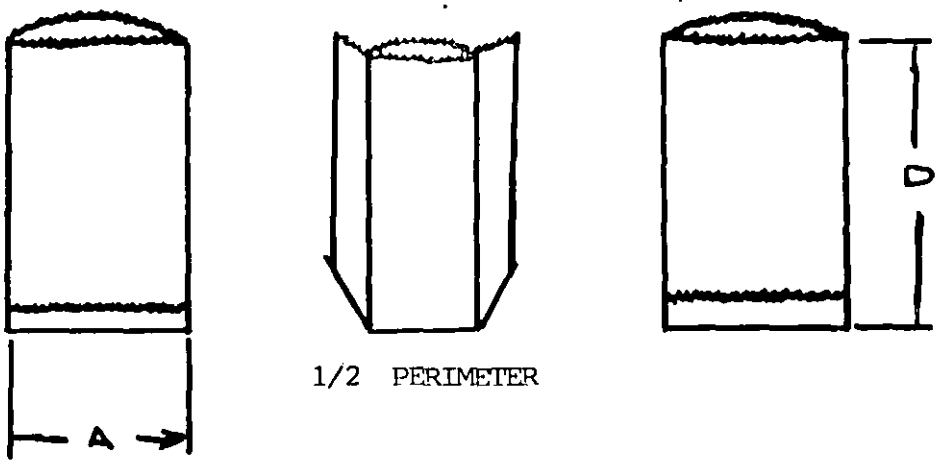

Face width, A. Measure across the front of the folded bag just above the top of the bottom fold.

Tuck width, C. Spread the bag so that the tucks normally behind the face are fully extended outward. Measure across flattened area of the bag as close to the bottom fold as possible. Substract the face width from this measurement to get dimension C.

Bag length, D. Measure along center of the bag, from the bottom fold to the top of the serrated edge of the front face.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:06Z
Check the source to verify that this is the current version before use.