FED. SUP CLASS.

AN100043

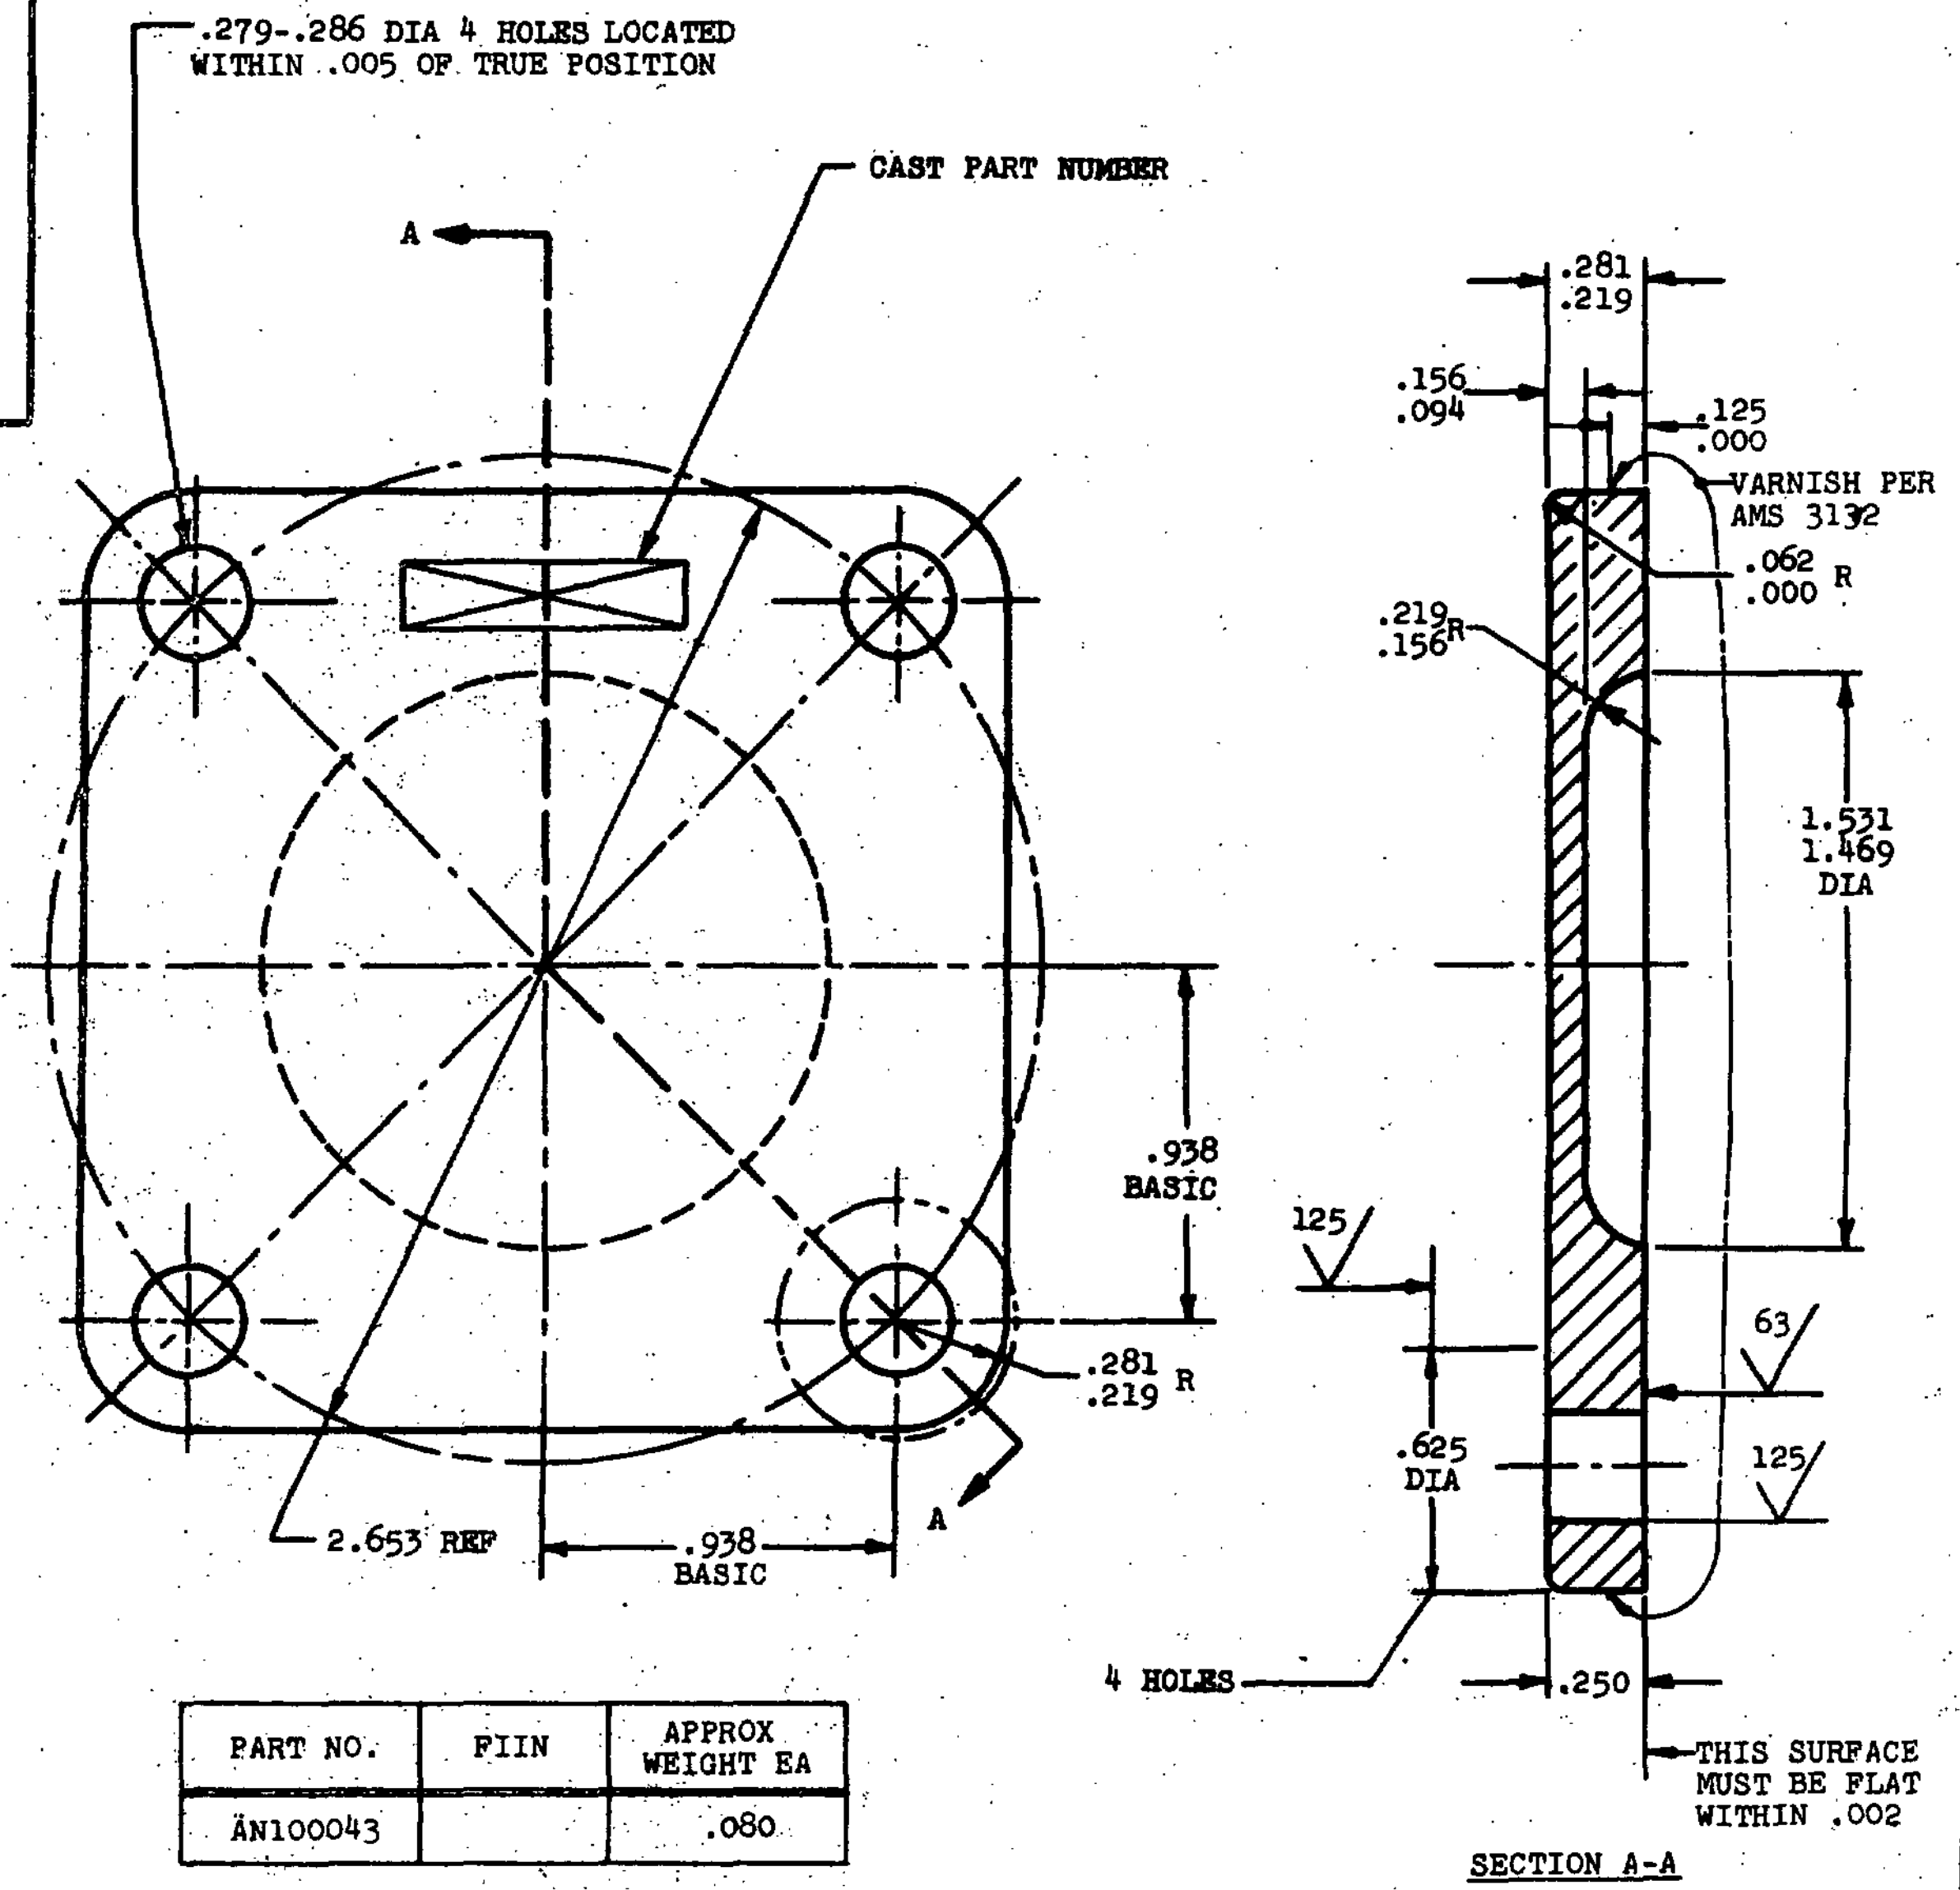

SECTION A-A

PART NO.	FIIN	APPROX WEIGHT EA
AN100043		.080

MATERIAL: MAGNESIUM AMS 4424 OR AMS 4484

PARTING LINES OF CASTINGS ARE TO BE COMMERCIALLY CLEAN.

SURFACE ROUGHNESS: AS 291 UNSPECIFIED SURFACES AS CAST.

MACHINED PARTS SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.

FINISH: AMS 2510 UNLESS OTHERWISE SPECIFIED.

CASTING IDENTIFICATION: AMS 2804

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.

COVERS SUITABLE FOR FLIGHT, SHIPMENT, AND STORAGE.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 9 Feb 50 REVISED ① 8 Jan 58 ② 15 Jul 59

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments to the Air Force-Navy standard for this product. This drawing supersedes all existing standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new design, not later than 6 months after the latest date of approval shown.

PROCUREMENT SPECIFICATION

AIR FORCE-NAVY AERONAUTICAL STANDARD

② COVER-TYPE X & XV ENGINE ACCESSORY DRIVE

AN100043

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.