NAVAER [illegible]

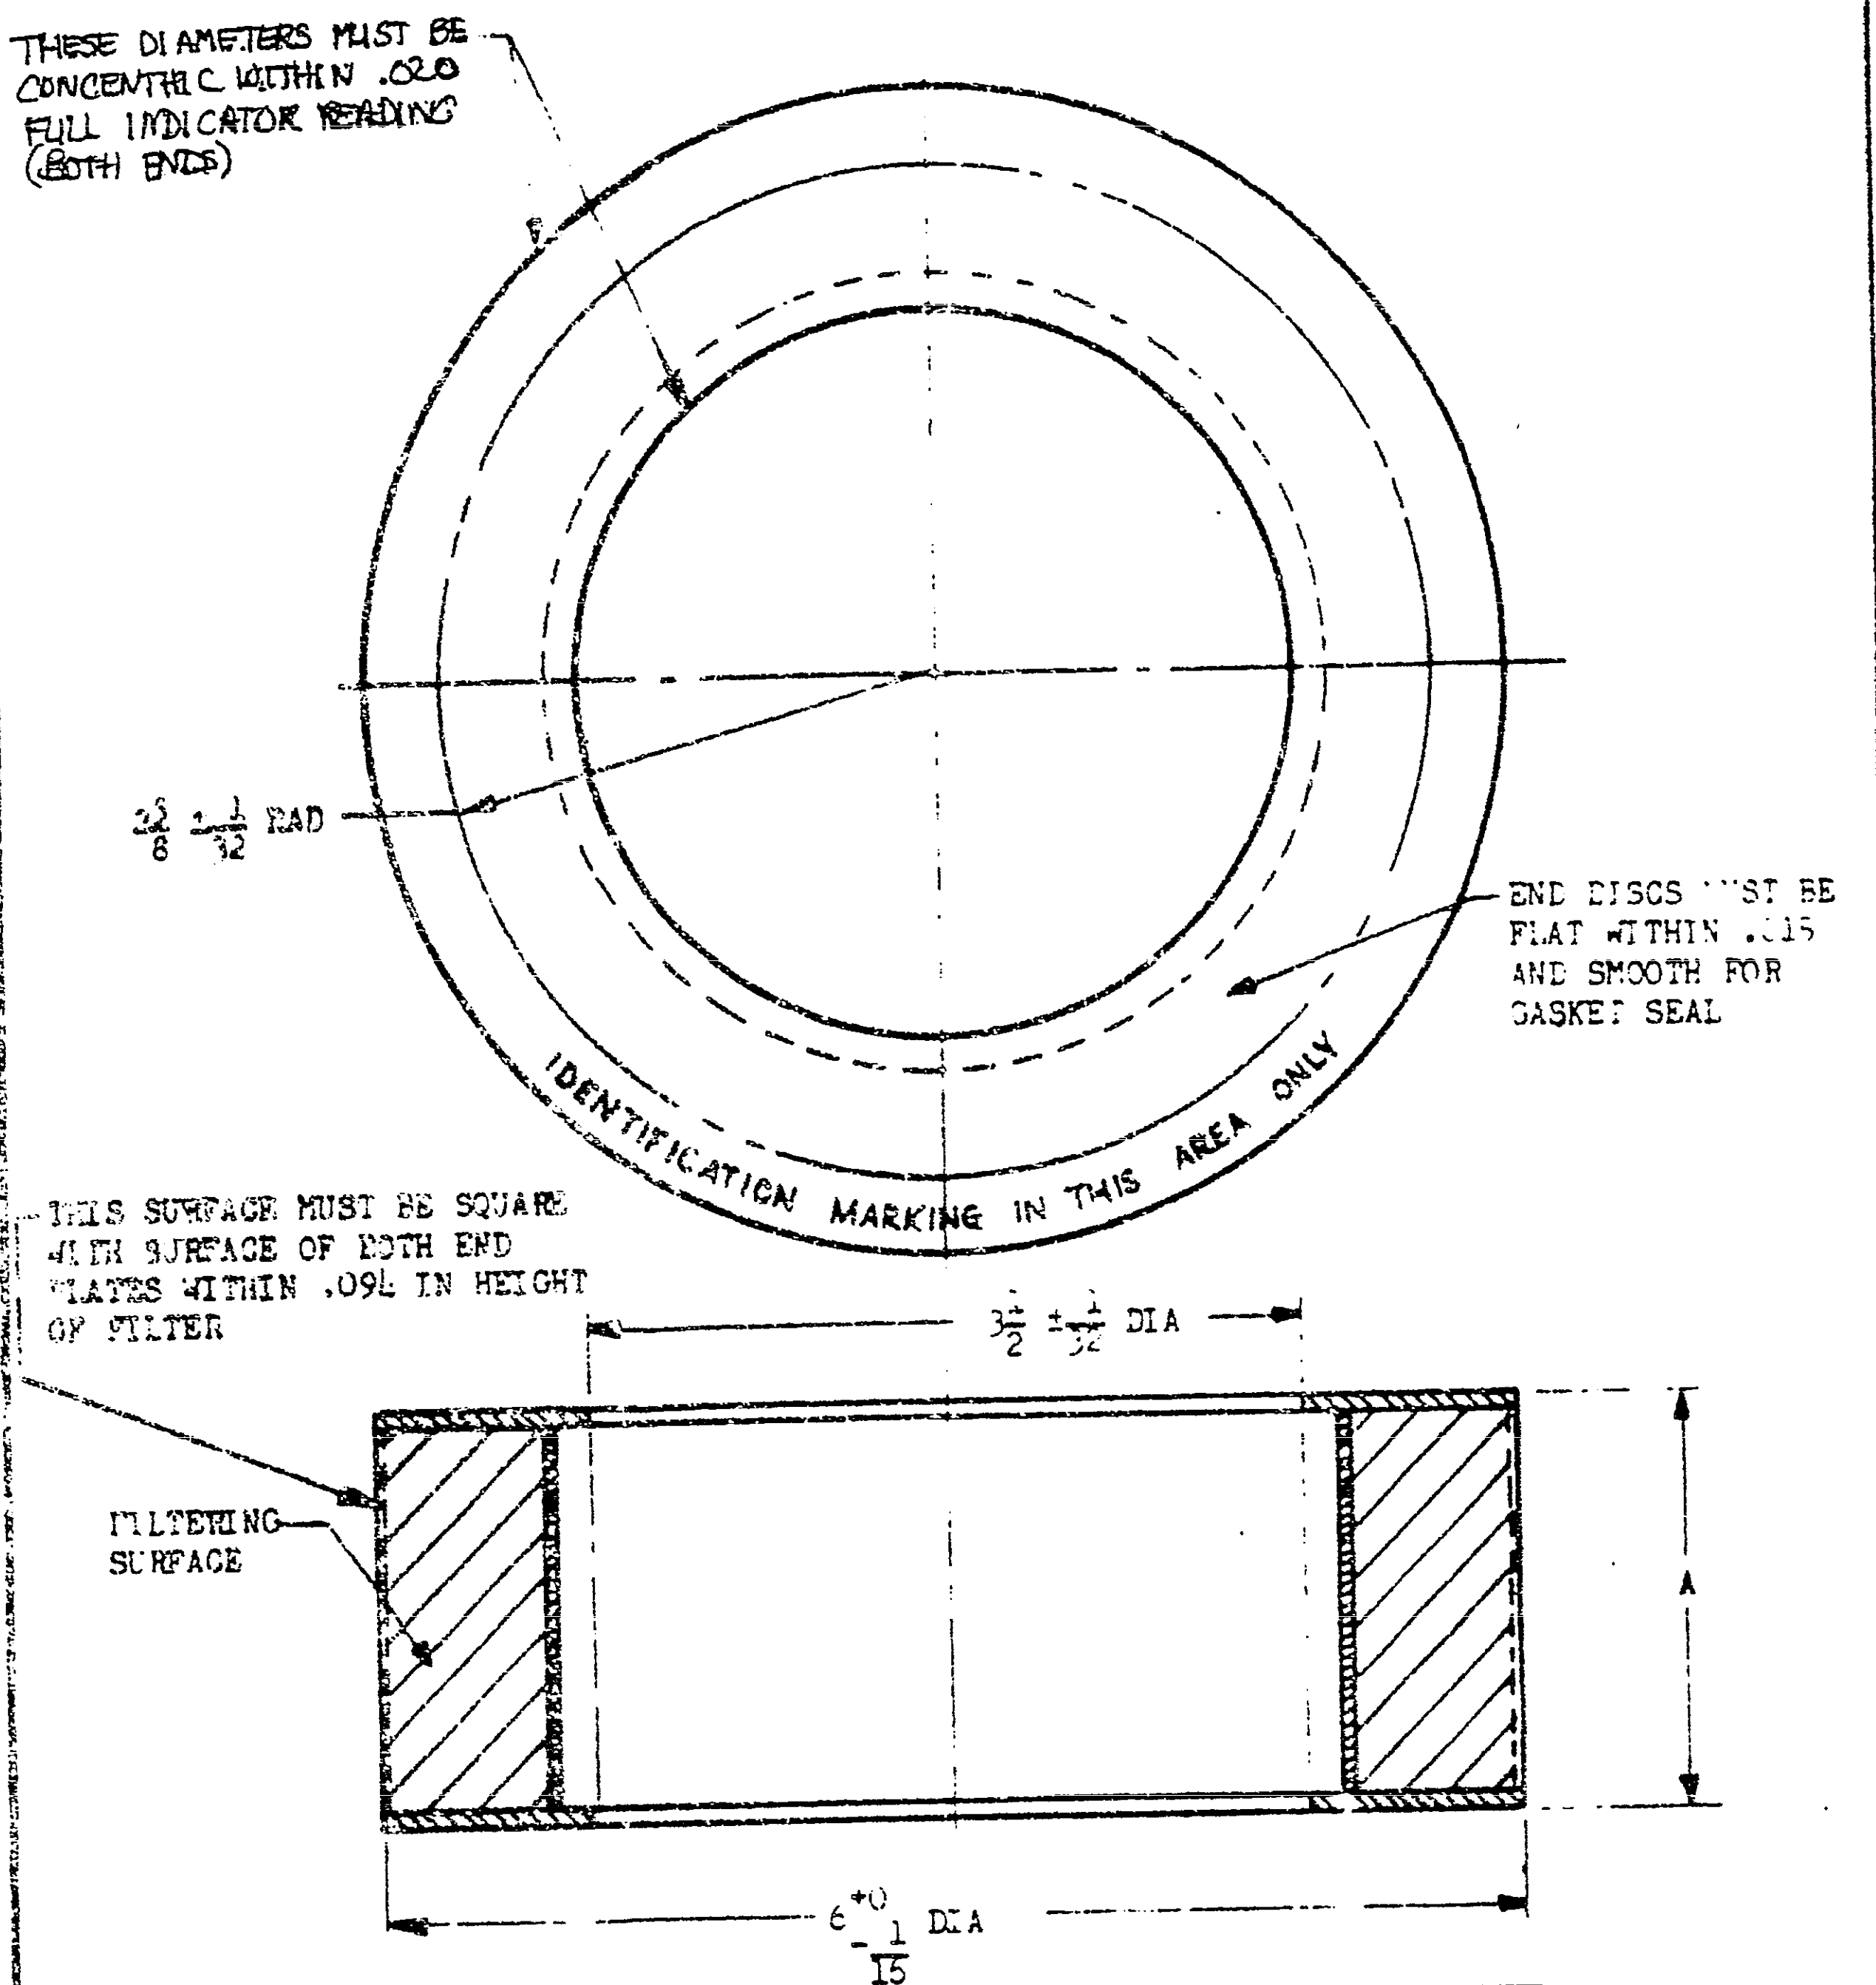
THESE DIAMETERS MUST BE CONCENTRIC WITHIN .020 FULL INDICATOR READING (BOTH ENDS)
2 5/8 ± 1/32 RAD
END DISCS MUST BE FLAT WITHIN .015 AND SMOOTH FOR GASKET SEAL
IDENTIFICATION MARKING IN THIS AREA ONLY
THIS SURFACE MUST BE SQUARE WITH SURFACE OF BOTH END PLATES WITHIN .094 IN HEIGHT OF FILTER
3 1/2 ± 1/32 DIA
FILTERING SURFACE
A
6 +0 -1/16 DIA

AN PART NO.	A +0 -1/16	CAPACITY GPM	OIL DISPLACEMENT, WET MAX. CU IN.	WEIGHT DRY MAX LB
AN6236-1	1-31/32	7-1/2	25	④ .60
AN6236-2	4	15	40	.90
AN6236-3	8- 1/16	30	65	1.80

DIMENSIONS IN INCHES.

FOR ACCEPTABLE PRODUCTS SEE QPL-5504.

NOTE—This drawing was approved by joint action of the Air Force and Navy Department as the Air Force-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, for use in new design, not later than six months after the latest date of approval shown.

[illegible] drawings, specifications, or other data are used for any purpose other than in connection with a [illegible] related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; [illegible] that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded [illegible] or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

APPROVED 23 Jun 43 REVISED ① 13 Mar 46 ② 25 Mar 48 ③ 27 Sep 48 ④ 27 Mar 51

PROCUREMENT SPECIFICATION
MIL-F-5504

AIR FORCE-NAVY AERONAUTICAL STANDARD

FILTER ELEMENT - HYDRAULIC REPLACEABLE MICRONIC

AN6236

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:22Z
Check the source to verify that this is the current version before use.