
NOTICE — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention, that may in any way be related thereto.

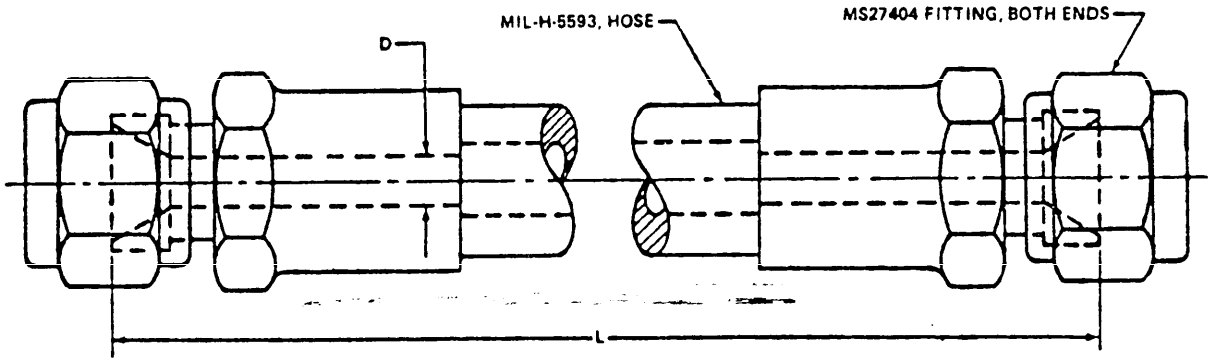

DASH NO.	TUBING OD	HOSE SIZE NO	HOSE NOM ID	END FITTING	D MIN DIA
2	1/8	2	1/8	MS27404-2	.052
3	3/16	3	3/16	MS27404-3	.109
4	1/4	4	1/4	MS27404-4	.156
6	3/8	6	3/8	MS27404-6	.281
8	1/2	8	1/2	MS27404-8	.375
10	5/8	10	5/8	MS27404-10	.453

ADD D AFTER DASH NUMBER FOR ALUMINUM ALLOY END FITTING
ADD S AFTER DASH NUMBER FOR STEEL END FITTING

EXAMPLE OF PART NUMBER:

(7)

AN6270-4S-0124 = HOSE ASSEMBLY, STEEL END FITTINGS FOR 1/4 INCH TUBING, 12-1/2 INCHES LONG
- 0124 → LENGTH IN EIGHTHS OF AN INCH (REPLACES FRACTION)
- 12 → LENGTH IN INCHES, FOR LENGTHS UNDER 10 INCHES USE 009,008,ETC.
- S → MATERIAL OF END FITTINGS

AN6270-6D-0168 = HOSE ASSEMBLY, ALUMINUM END FITTINGS, 3/8 INCH TUBING, 16-3/4 INCHES LONG

(7)

HOSE ASSEMBLY LENGTH (L) TO BE SPECIFIED IN THE FOLLOWING INCREMENTS ONLY:

UNDER 12 INCHES LONG - NOT LESS THAN 1/8 INCH.

12 TO 18 INCHES LONG - NOT LESS THAN 1/4 INCH.

OVER 18 INCHES LONG - NOT LESS THAN 1/2 INCH.

REMOVABLE TAG SHOWING CODE NUMBER SHALL BE ATTACHED TO THE HOSE ASSEMBLY. THIS TAG SHALL BE REMOVED UPON INSTALLATION IN AIRPLANE.

CODE NUMBERS FOR USE OF AIRCRAFT CONTRACTORS AND HOSE ASSEMBLERS ONLY. PROVISIONING PARTS BREAKDOWN MUST LIST COMPONENT PARTS. SPARE AND MAINTENANCE PARTS ARE NOT TO BE ORDERED BY THE SERVICES UNDER THE ASSEMBLY PART NUMBER. SERVICES TO ORDER END FITTING BY THEIR INDIVIDUAL PART NUMBERS, AND HOSE IN ROLLS ACCORDING TO SPECIFICATION MIL-H-5593.

IF IN ASSEMBLING OR TESTING OF HOSE ASSEMBLIES, THREADS OF AN818 COUPLING NUTS BECOME SLIGHTLY DISTORTED AND FALL BELOW A CLASS 3 THREADTOLERANCE BUT NOT BELOW A CLASS 2, THESE ASSEMBLIES WILL BE ACCEPTABLE FOR USE ON AIR FORCE AND NAVY AIRCRAFT. THIS SHALL NOT BE CONSTRUED AS ALLOWING AN818 COUPLING NUTS TO BE MANUFACTURED OR TO BE ACCEPTED BY THE HOSE ASSEMBLER WITH A THREAD TOLERANCE WIDER THAN CLASS 3.

DIMENSIONS IN INCHES.

FOR ACCEPTABLE HOSE SEE QPL-5593.

FOR ACCEPTABLE END FITTINGS SEE QPL 38726.

HOSE ASSEMBLIES SHALL BE PROOF PRESSURE TESTED IN ACCORDANCE WITH THE REQUIREMENTS OF SPECIFICATION MIL-H-5593.

THE AGE OR SHELF LIFE OF HOSE ASSEMBLIES COVERED BY THIS DRAWING AND FURNISHED FOR USE BY THE GOVERNMENT SHALL NOT EXCEED THE TIME LIMITS ESTABLISHED IN MIL-STD-1523.

(7)

This military standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 6 Feb 45 REVISED (1) 4 Mar 46 (2) 19 Dec 50 (3) 26 Aug 52 (4) 25 Feb 54 (5) 7 Jul 69 (6) 26 Jul 71 (7) 19 Aug 74

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN6270
NONE	HOSE ASSEMBLY - DETACHABLE SWIVEL FITTING, LOW PRESSURE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:23Z
Check the source to verify that this is the current version before use.

SUPERSEDES AN856