NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

NOTE: This drawing was approved by joint action of the War and Navy Departments as the Army-Navy standard for this product. This drawing supersedes all antecedent standard drawings for the same product and shall become effective for the procurement of new/initial supplies, or for use in new designs, not later than 6 months after the latest date of approval shown. It may be put into effect, however, at an earlier date after promulgation.

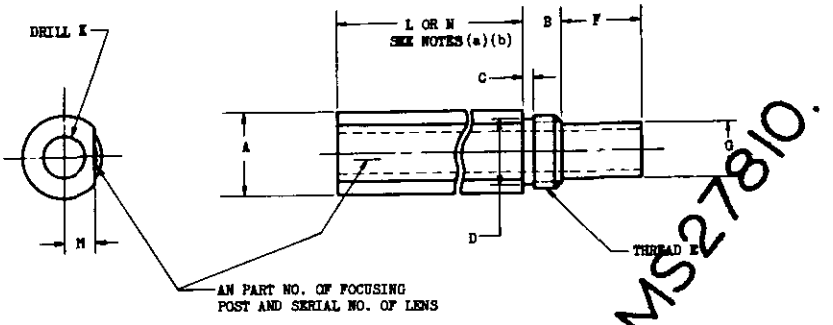

AN PART NO.	A DIA	B	C	D DIA	E THREAD	F * TENON	G DIA	K DIA	(a) L ±.001	M	(b) N +.010 −.000
AN7022-1	0.437	7/16	1/8	0.281	3/8-16NC-2	NONE	NONE	0.199	5.819-F.F.	0.160	0.710
AN7022-2	0.375	13/32	1/16	0.250	5/16-24NF-2	NONE	NONE	0.190	F.F.-4.717	0.142	0.675
AN7022-3	0.437	9/64	3/64	0.331	3/8-32NEF-2	0.651	0.270	0.199	F.F.-5.587	0.160	0.420
AN7022-4	0.437	7/16	3/32	0.281	3/8-16NC-2	NONE	NONE	0.199	F.F.-10.420	0.156	0.850
AN7022-5	0.437	7/16	3/32	0.281	3/8-16NC-2	NONE	NONE	0.199	11.535-F.F.	0.156	0.965
AN7022-6	0.437	9/16	5/32	0.294	3/8-16NC-2	NONE	NONE	0.173	F.F.-10.359	0.153	1.000
AN7022-7	0.562	1/2	3/32	0.430 UNDER CUT	1/2-20NF-2	NONE	NONE	0.328	F.F.-9.103	0.220	0.825
AN7022-8	0.562	1/2	1/16	0.430 UNDER CUT	1/2-20NF-2	NONE	NONE	0.328	F.F.-20.570	0.223	1.950
AN7022-9	0.437	1/2	1/8	0.319	3/8-24NF-2	NONE	NONE	0.218	F.F.-20.903	0.164	1.615
AN7022-10	0.437	1/2	1/8	0.319	3/8-24NF-2	NONE	NONE	0.218	F.F.-22.309	0.164	1.490

(a) COLUMN "L" SHOWS FORMULAS FOR COMPUTATION OF "L" IN TERMS OF F.F. (FLANGE FOCUS) AND APPROPRIATE CAMERA CONSTANT.
(b) COLUMN "N" SHOWS LENGTHS FOR BLANK FOCUSING POSTS WHICH ARE SUPPLIED FOR USE AS SPARES, REFOCUSING, ETC.

REMOVE BURRS AND SHARP EDGES.
DIAMETERS SHALL BE CONCENTRIC WITHIN 0.005 FULL INDICATOR READING.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, DECIMALS ±.005.
DRILLS IN ACCORDANCE WITH AND10387.

CANCELLED AFTER 1 JUNE 1967 USE MS27810.

APPROVED 5 Apr 46 REVISED (A) Jan 68

PROCUREMENT SPECIFICATION	ARMY-NAVY AERONAUTICAL STANDARD	AN7022
AN-P-83	POST-AERIAL CAMERA LENS FOCUSING	

GPO 813232

☆ U.S. GOVERNMENT PRINTING OFFICE: 1968-301-515/3341

Source: https://assist.dla.mil -- Downloaded: 202610-26T14:23Z
Check the source to verify that this is the current version before use.