This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army - , MI, MU
Navy - EC, AS, OS, YD
Air Force - 11, 17, 80
DSA - ES

User activities: Army - .
Navy - MC, CG
Air Force - 14, 19

DD FORM 1 SEP 63 **672** *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A. Navy - EC
Other Cust Army - CR
AF - 11

International interest

Procurement Specification
MIL-C-22992

SUPERSEDES:

TITLE **REMOVAL TOOL, ELECTRICAL CONNECTOR CONTACT (CLASS L)**

Ⓓ CANCELED USE MIL-I-81969/27

Ⓓ DENOTES CHANGE

MILITARY STANDARD

MS 90562

PAGE 1 OF 1

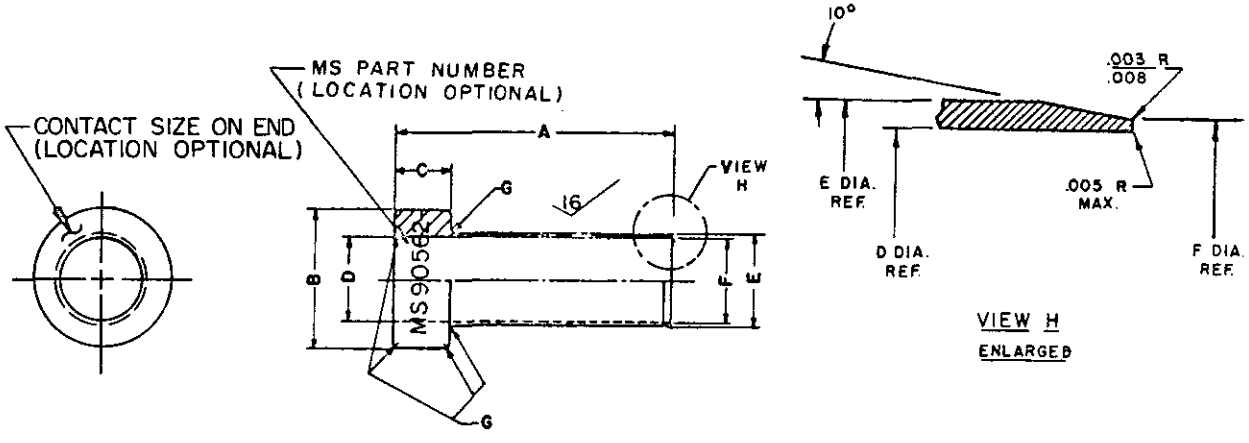

MS PART NUMBER	CONTACT SIZE	A ±.016	B DIA ±.016	C ±.016	D DIA +.002 -.000	E DIA +.000 -.002	F DIA +.000 -.002	G RAD ±.031
MS90562-1	4/0	2.500	1.250	.500	.753	.790	.772	.062
-2	2/0	2.500	1.125	.500	.659	.696	.678	.062
-3	1/0	2.500	1.000	.500	.521	.558	.540	.062
-4	2	2.500	.938	.500	.425	.462	.444	.062
-5	4	2.500	.875	.500	.339	.376	.358	.062
-6	6	2.500	.812	.500	.317	.354	.336	.062

NOTES:
1. Material shall be corrosion resisting steel, class 303, cond A, per QQ-S-763.
2. Dimensions are in inches. Unless otherwise specified tolerances are ±.010 and ±2°.
3. Concentricity is .004 TIR (RFS).
4. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
5. Referenced documents shall be of the issue in effect on date of invitation for bid.

FED. SUP CLASS 5120

APPROVED 1-JUNE-1966 REVISED Ⓐ 2 February 1972 Ⓑ 29-JANUARY-1973 Ⓒ 28 Aug 1974 Ⓓ 6 June 1980

Source: https://assist.dla.mil/quicksearch/ Downloaded: 2026-03-23 EDT
Check the source to verify that this is the current version before use.