
MIL-F-24646/10(SH)
30 November 1984
SUPERSEDING
(See table I)

MILITARY SPECIFICATION SHEET

FUSE BOXES, FEEDER DISTRIBUTION, SUBMERSIBLE (15 FEET), 250 VOLTS, ALTERNATING CURRENT, THREE PHASE BUSES, SINGLE AND THREE PHASE BRANCHES, 0-30 AMPERE FUSES, SYMBOLS 560.1, 561.1, 562.1 AND 563.1

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuse boxes described herein shall consist of this document and the latest issue of MIL-F-24646(SH).

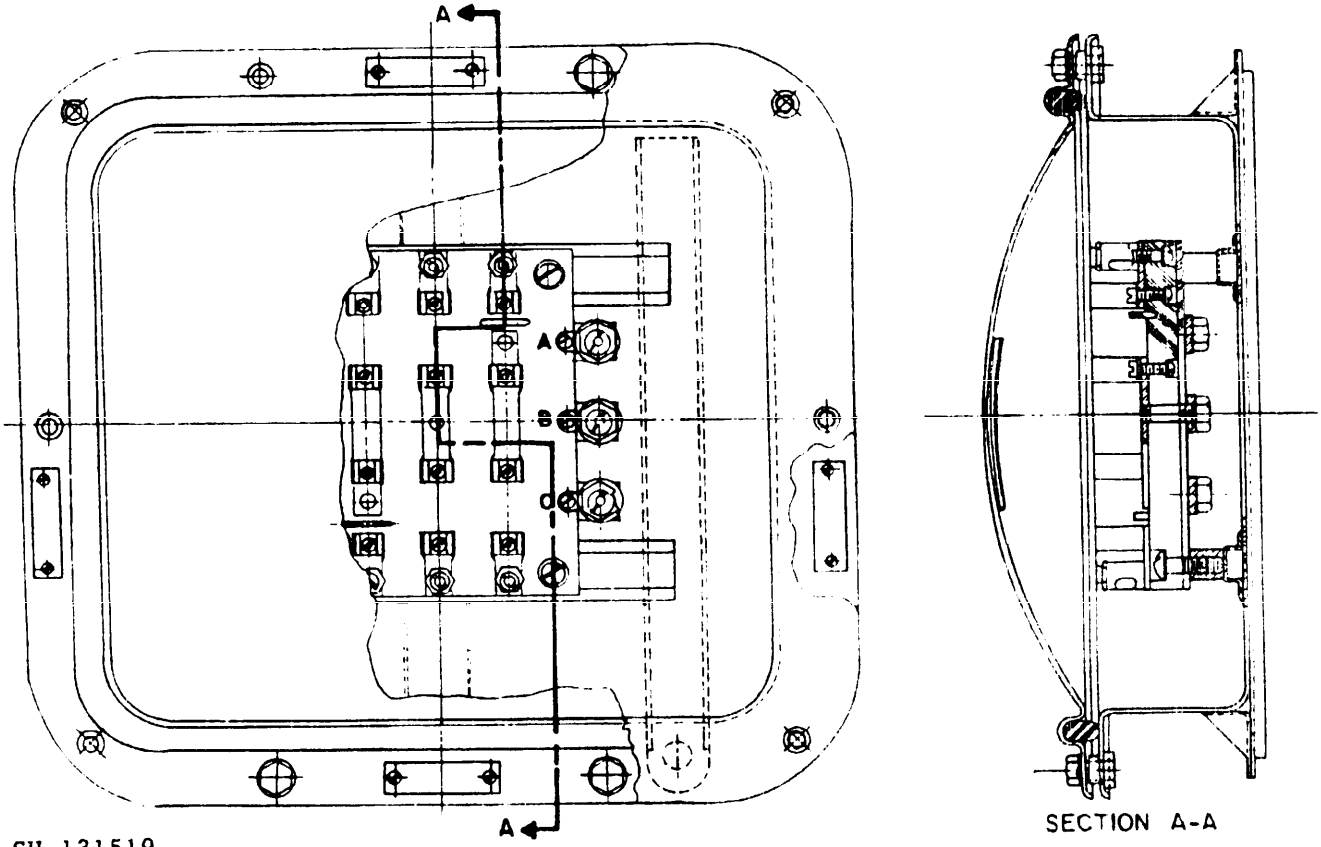

SH 131519

FIGURE 1. Fuse box assembly, typical. (01) (02) (03) (04)
(Symbol 560.1 shown)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:33Z
Check the source to verify that this is the current version before use.


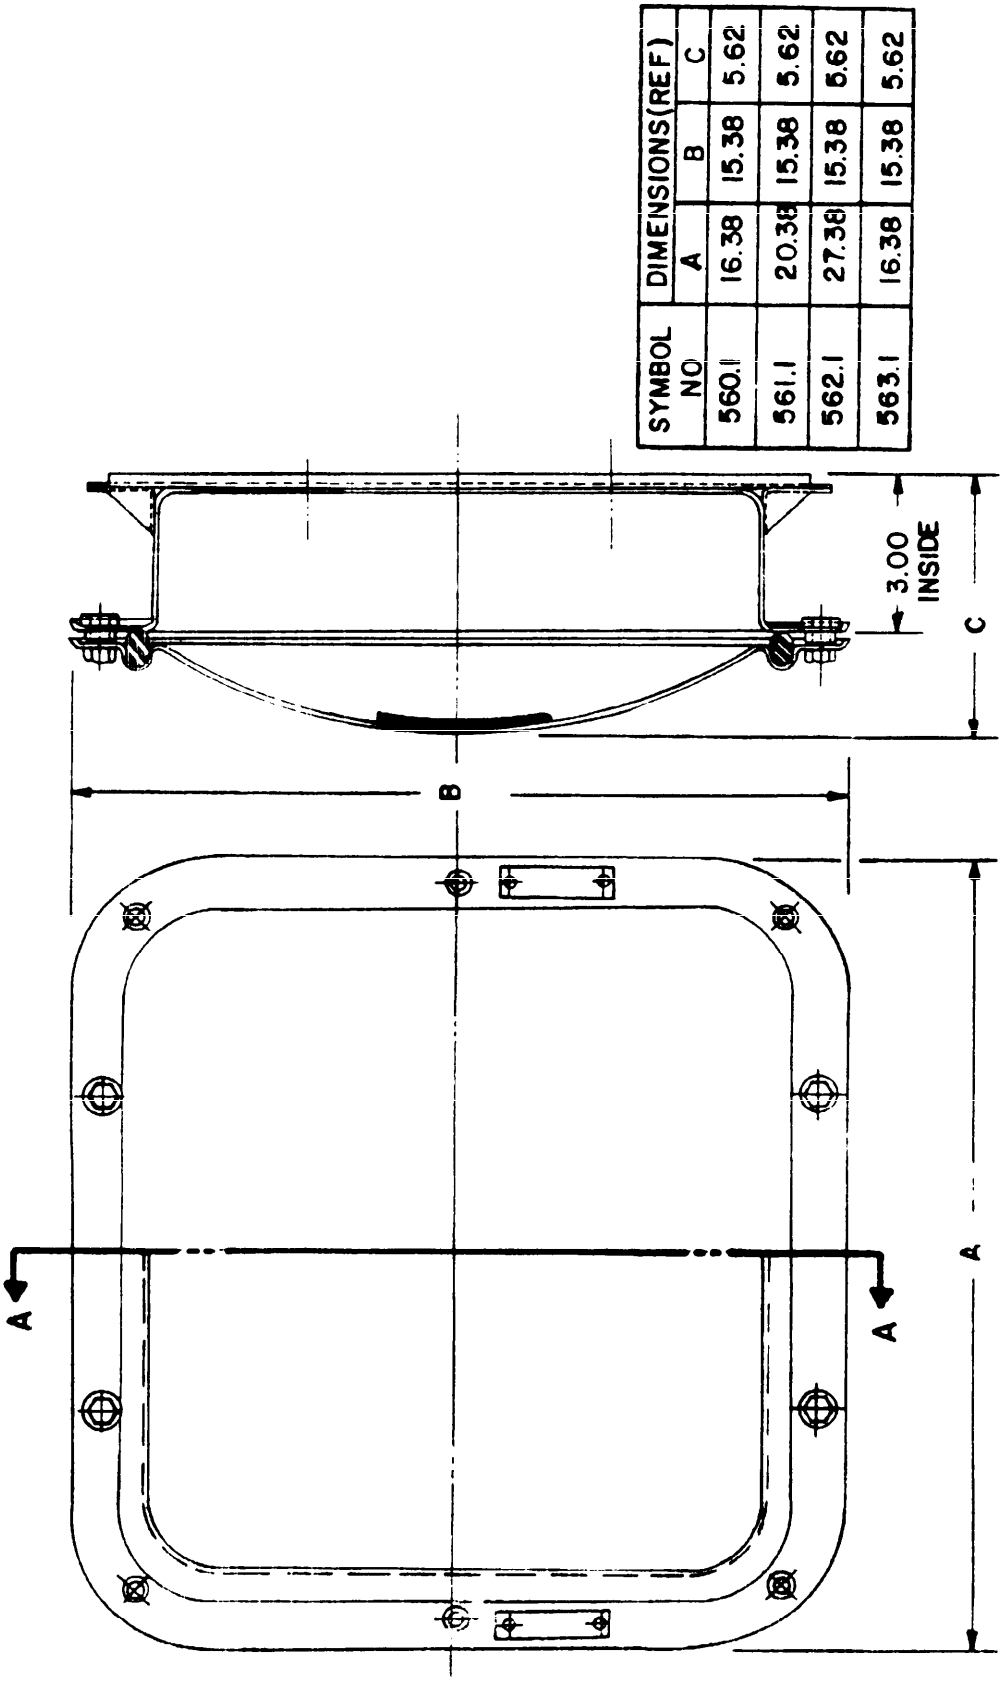


FIGURE 2. Enclosure, overall dimensions. (05) (06) (07)


(Symbols 560.1, 561.1, 562.1 and 563.1)

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:33Z
Check the source to verify that this is the currentversion before use.

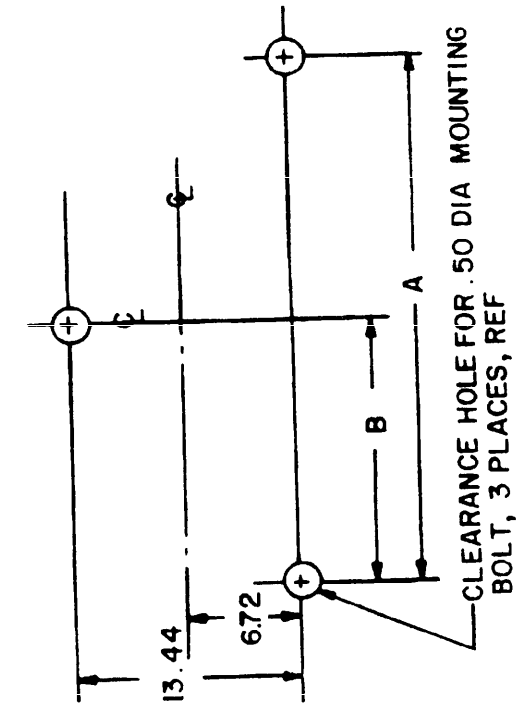

SYMBOL NO	DIMENSIONS	
	A	B
560.1	9.25	4.62
561.1	12.00	6.00
563.1	9.25	4.62

B. Symbols 560.1, 561.1, and, 563.1

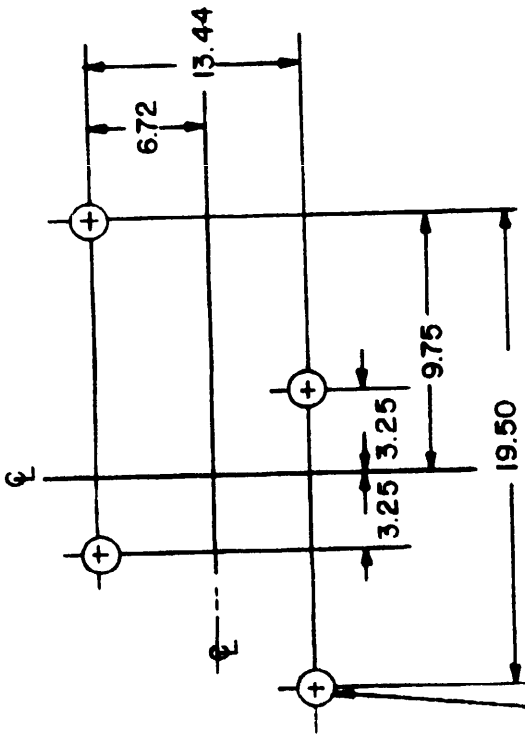


A. Symbol 562.1

FIGURE 3. Mounting dimensions, ref.

SH 131521

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:33Z
Check the source to verify that this is the currentversion before use.

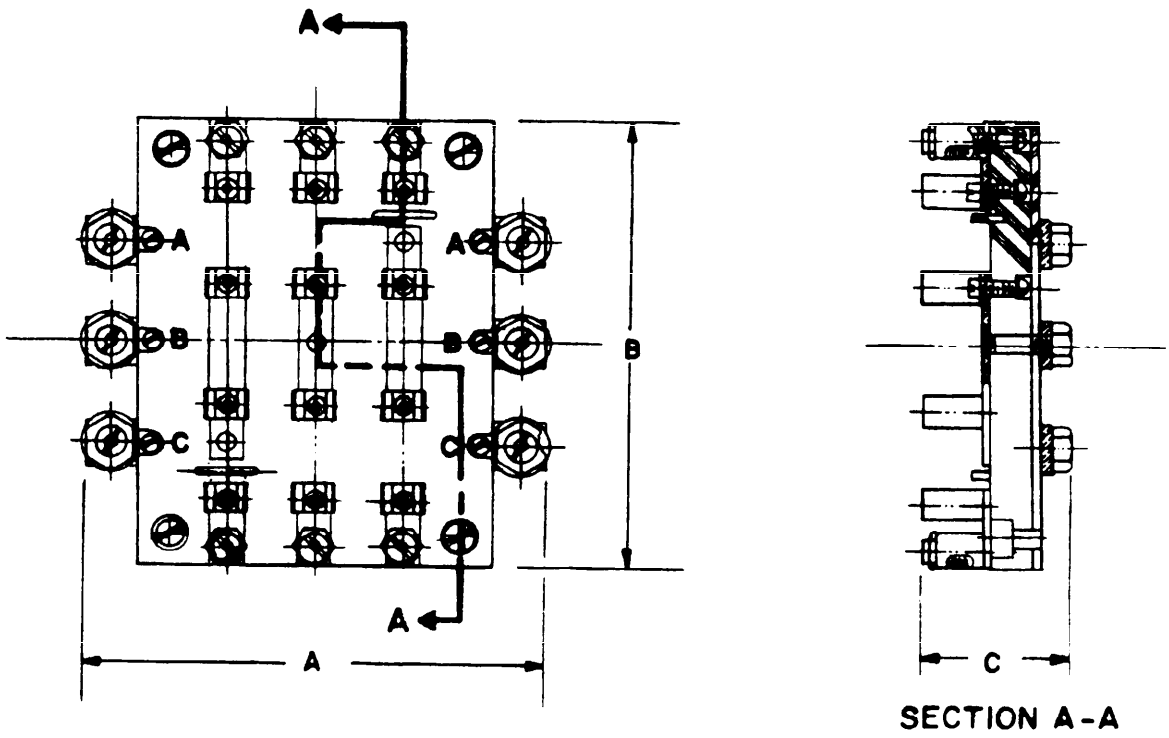


SYMBOL NO	DIMENSIONS (MAX)		
	A	B	C
560.1	7.12	7.12	2.70
561.4	11.61	7.12	2.80
562.1	16.12	7.12	2.70
563.1	7.61	7.12	2.80

SH 131522


FIGURE 4. Fuse block assembly, typical. (08) (09) (10) (11)

(Symbols 560.1, 561.4, 562.1 and 563.1)


Source: https://assist.dla.mil -- Downloaded: 20261O-20T00:33Z
Check the source to verify that this is the current version before use.

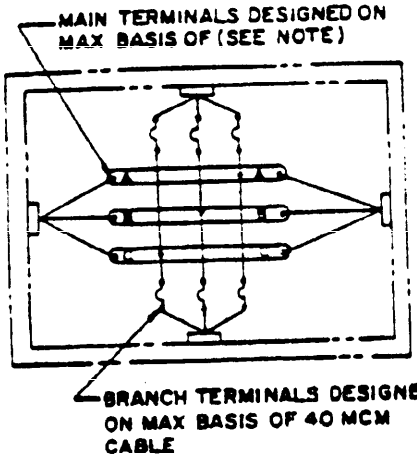


A. Two 3-phase branches (Symbols 560.1 and 563.1)

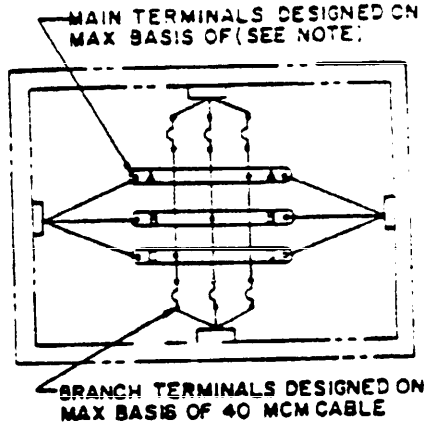


B. Two single-phase branches (Symbols 560.1 and 563.1)

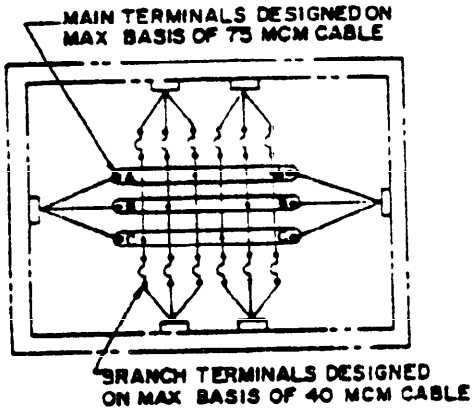

C. Four 3-phase branches (Symbol 561.1)

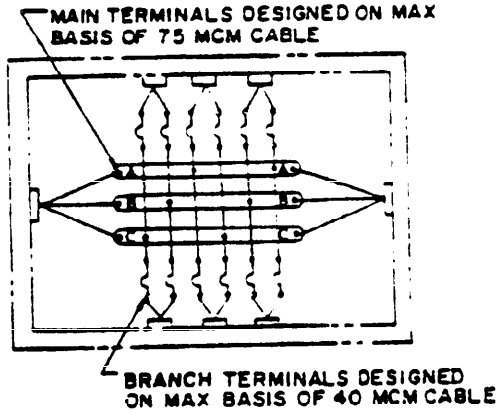

D. Six single-phase branches (Symbol 561.1)

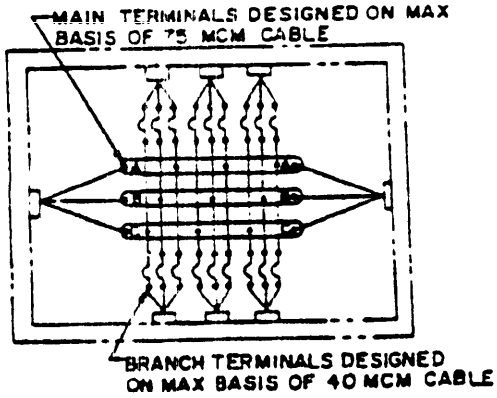

E. Six 3-phase branches (Symbol 562.1)

NOTE: MAIN TERMINALS
SYMBOL 560.1 75 MCM
SYMBOL 563.1 200 MCM

SH 131523

FIGURE 5. Wiring diagrams. (12) (13) (14) (15)

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Symbol numbers: See table I.

Design:
Electrical rating: 250 volts alternating current, 0-30 ampere, 60 hertz.
Dimensions and configuration: See figures 1, 2, 3 and 4.
Wiring diagrams: See figure 5.
Mounting dimensions: See figure 3.
Degree of enclosure: Submersible (15 feet).
Designation and marking: See MIL-F-24646(SH).
Parts: The parts listed in table II and specified in MIL-F-24646(SH) shall be used in the construction of the fuse boxes specified herein.

General information:
Military part numbers and general information are as specified in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	Weight in pounds	No. of circuits	Feeder MCM	Branch MCM	Fuse size	Bus bar size	Supersedes	
								Drawing no.	Type
M24646/10-001	560.1	28.0	2	75	40	0-30A	0.75 x 0.19	9000-S-6202-74171	F-14A
M24646/10-002	561.1	35.5	4	75	40	0-30A	.75 x .25	9000-S-6202-74172	F-16A
M24646/10-003	562.1	48.0	6	75	40	0-30A	.75 x .19	9000-S-6202-74173	F-18A
M24646/10-004	563.1	29.2	2	200	40	0-30A	1.00 x .25	9000-803-74170	F-12A

Source: https://assist.dla.mil -- Downloaded: 202640-20T00:33Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	QTY M /-				Material/spec	Remarks
		001	002	003	004		
01	Fuse box assembly (sym 560.1)	-				MIL-F-24646/10	See figure 1
02	Fuse box assembly (sym 561.1)		-			MIL-F-24646/10	See figure 1
03	Fuse box assembly (sym 562.1)			-		MIL-F-24646/10	See figure 1
04	Fuse box assembly (sym 563.1)				-	MIL-F-24646/10	See figure 1
2/05	Enclosure (12 x 13 x 3)	1			1	M24142/6-008	See figure 2 Type A mod
2/06	Enclosure (12 x 17 x 3)		1			M24142/6-009	See figure 2 Type A mod
2/07	Enclosure (12 x 24 x 3)			1		M24142/6-010	See figure 2 Type A mod
2/08	Enclosure (12 x 13 x 3)				1	M24142/6-008	See figure 2 Type A mod
09	Fuse block assembly	1				MIL-F-24646/10	See figure 4
10	Fuse block assembly		1			MIL-F-24646/10	See figure 4
11	Fuse block assembly			1		MIL-F-24646/10	See figure 4
12	Fuse block assembly				1	MIL-F-24646/10	See figure 4
13	Wiring diagram	2				MIL-E-2036	See figure 5
14	Wiring diagram		2			MIL-E-2036	See figure 5
15	Wiring diagram			2		MIL-E-2036	See figure 5
16	Wiring diagram				1	MIL-E-2036	See figure 5
17	Fuse clip (0-30A)	12	24	36	12	M21346/1-06	----
18	Identification plate	1	1	1	1	Brass, QQ-B-613	----
19	Information plate	2	4	6	2	Brass, QQ-B-613	----

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

2/ Enclosure is same as MIL-E-24142/6(SH), except for inside depth which is 3 inches instead of 5 inches shown.

Preparing activity:
Navy - SH
(Project 5920-N163-10)

Source: https://assist.dla.mil -- Downloaded: 202640-20T00:33Z
Check the source to verify that this is the current version before use.

.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:33Z
Check the source to verify that this is the current version before use.