

MILITARY SPECIFICATION SHEET

FUSE BOXES, FEEDER JUNCTION, SUBMERSIBLE, (15 FEET), 250 VOLTS, ALTERNATING CURRENT, FEED THROUGH TWIN CONDUCTORS, SINGLE AND THREE PHASE BUSES, SINGLE AND THREE PHASE BRANCHES, 0-30 AND 31-60 AMPERE FUSES, SYMBOLS 685.1, 686.1, 691.1 AND 692.1

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuse boxes described herein shall consist of this document and the latest issue of MIL-F-24646(SH).

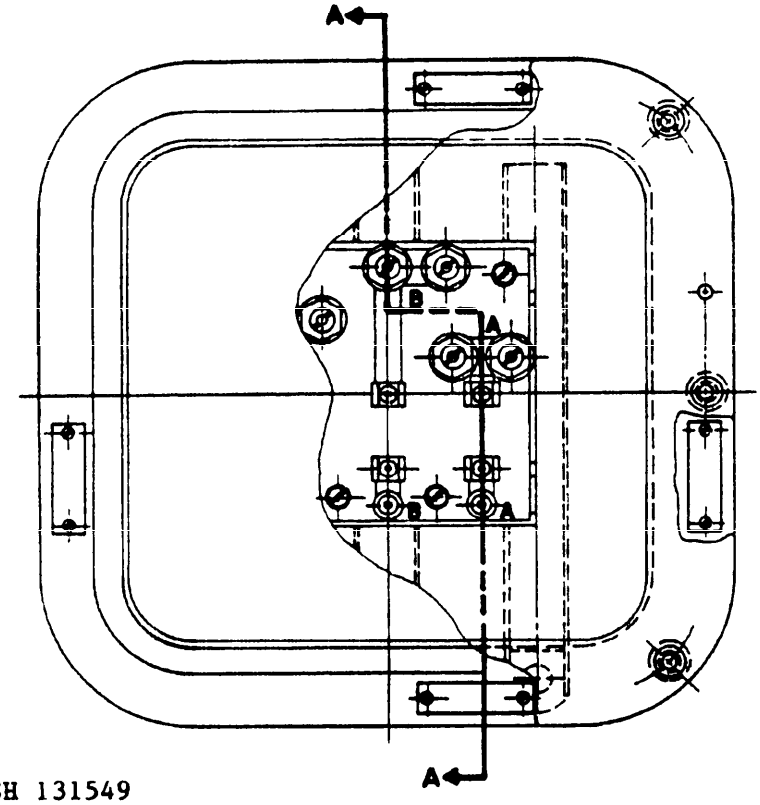

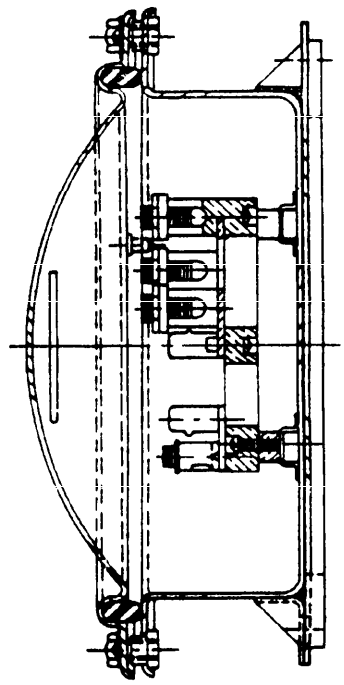

SECTION A-A

SH 131549


FIGURE 1. Fuse box assembly, typical. (01) (02) (03) (04)
(Symbol 691.1 shown)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:35Z
Check the source to verify that this is the current version before use.

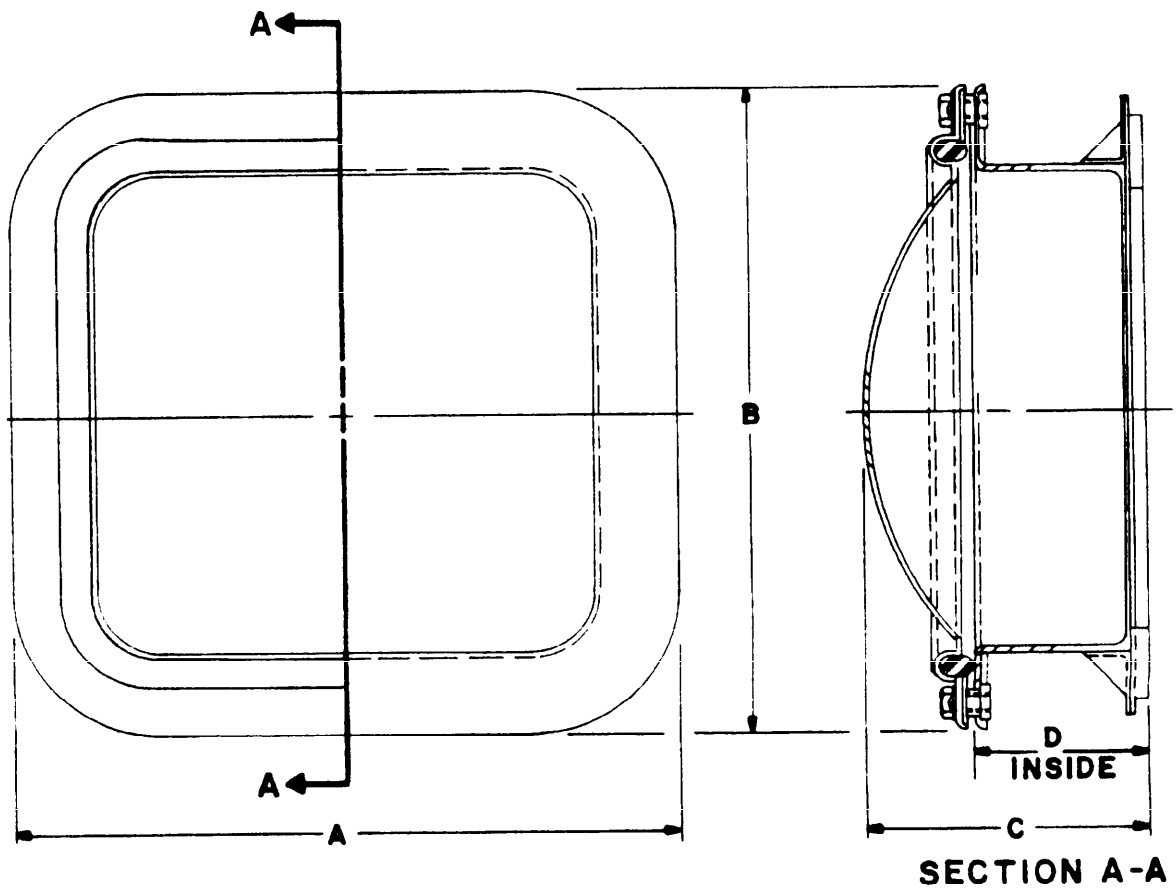


SYMBOL NO	DIMENSIONS(REF)			
	A	B	C	D
685.1	10.94	8.00	5.12	4.50
686.1	10.94	8.00	5.12	4.50
691.1	13.38	13.38	5.50	3.00
692.1	15.38	16.38	6.00	4.00

SH 131550

FIGURE 2. Enclosure, overall dimensions. (05) (06) (07)

(Symbols 685.1, 686.1, 691.1 and 692.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:35Z
Check the source to verify that this is the current version before use.

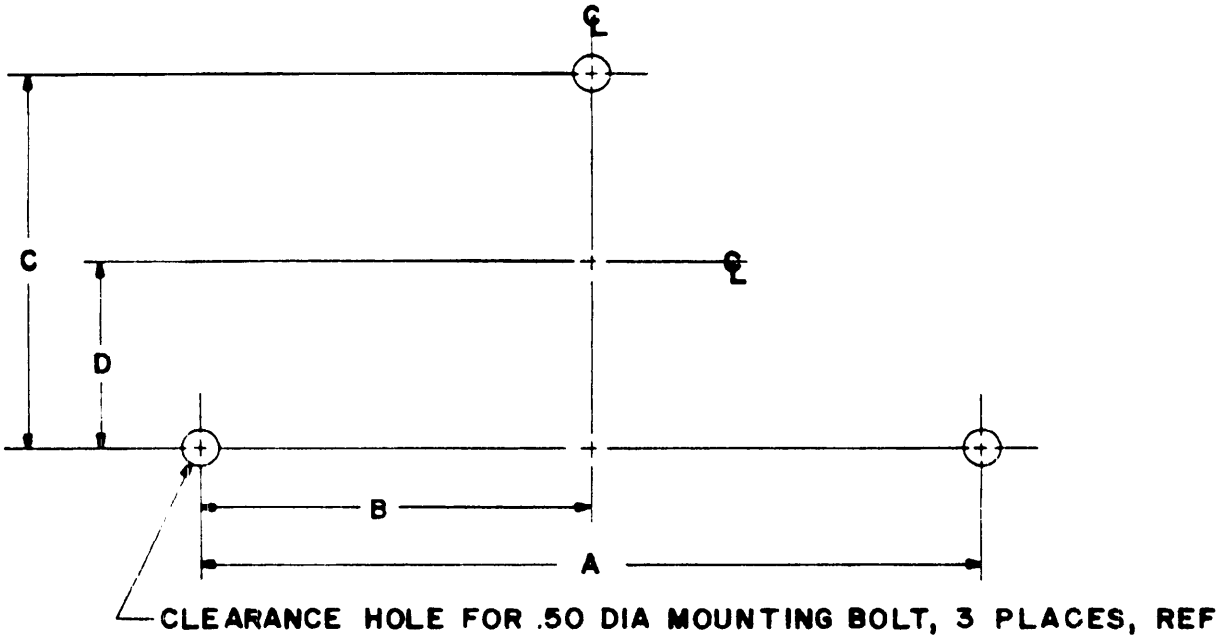


SYMBOL NO	DIMENSIONS			
	A	B	C	D
685.1	7.25	3.62	7.88	2.75
686.1	7.25	3.62	7.88	2.75
691.1	5.75	2.88	11.44	5.72
692.1	9.25	4.62	13.44	6.72

SH 131551

FIGURE 3. Mounting dimensions, ref.

(Symbols 685.1, 686.1, 691.1 and 692.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:35Z
Check the source to verify that this is the current version before use.

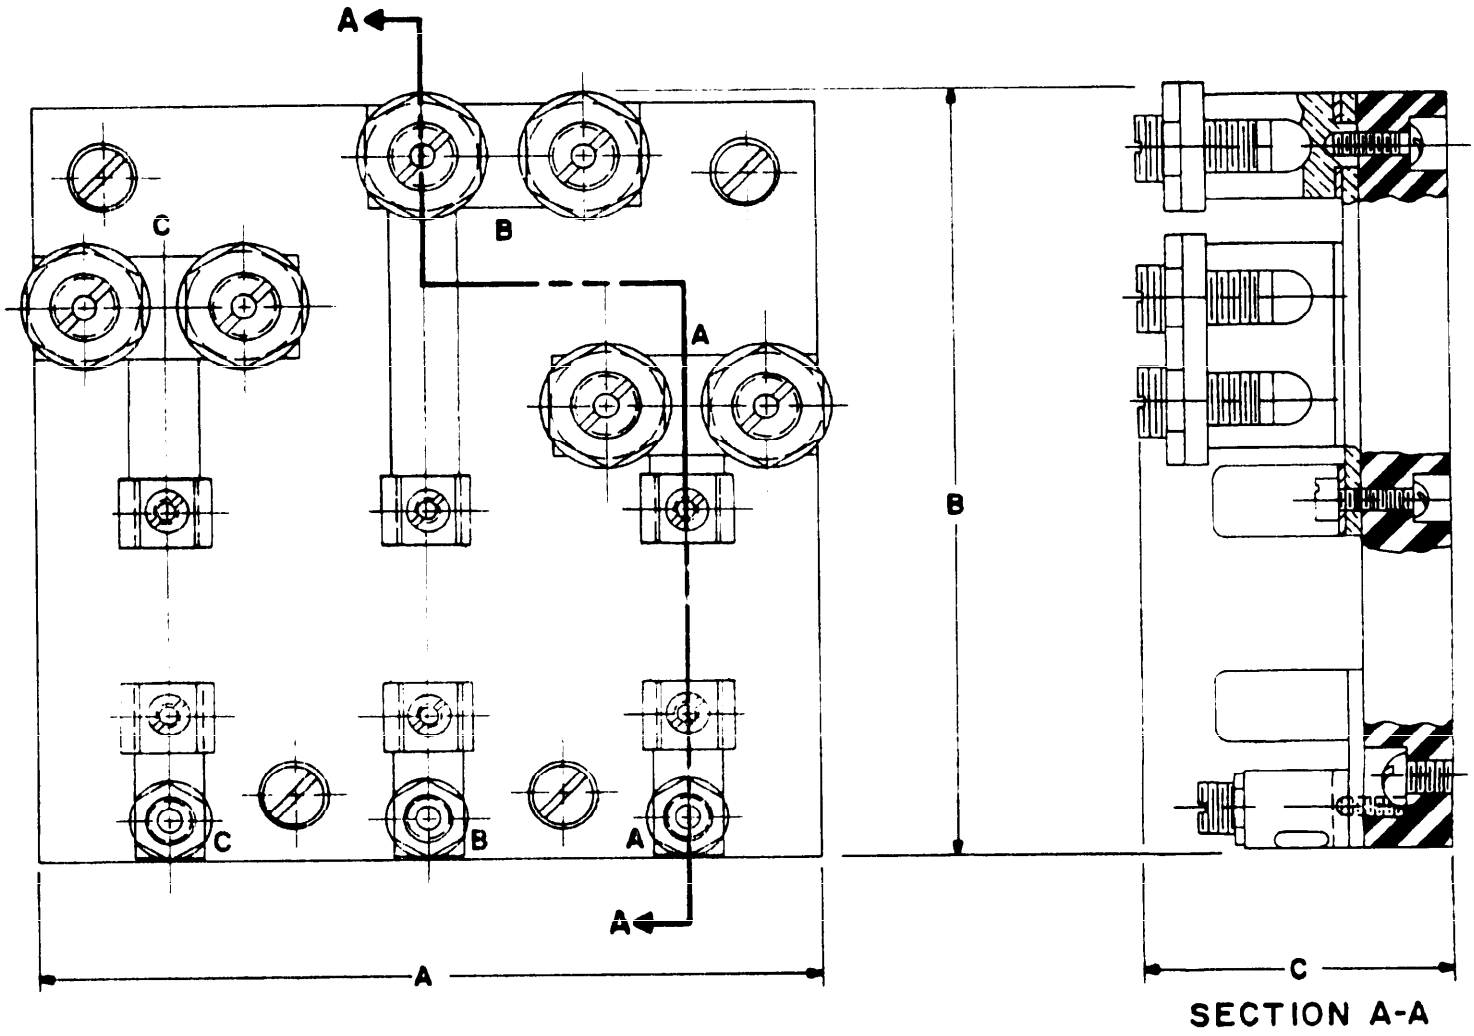


SYMBOL NO	DIMENSIONS (MAX)		
	A	B	C
685.1	6.25	4.50	2.06
686.1	6.25	4.50	2.06
691.1	5.50	5.50	2.06
692.1	8.38	6.75	2.37


SH 131552

FIGURE 4. Fuse block assembly, typical. (08) (09) (10) (11)
(Symbol 691.1 shown)


Source: https://assist.dla.mil -- Downloaded: 202610-20T00:35Z
Check the source to verify that this is the current version before use.

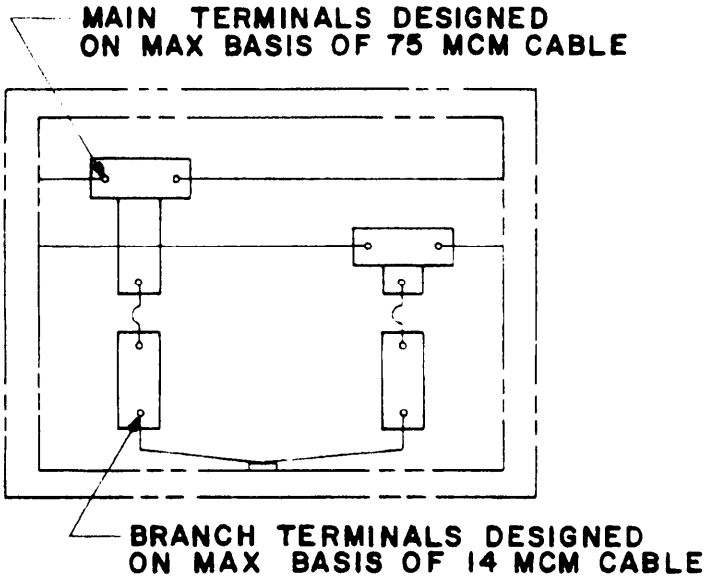


A. One single-phase branch
(Symbol 685.1)

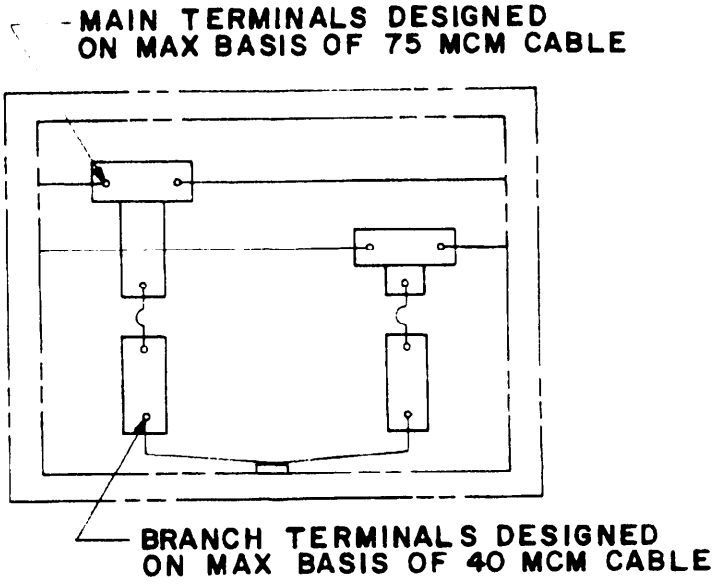

B. One single-phase branch
(Symbol 686.1)

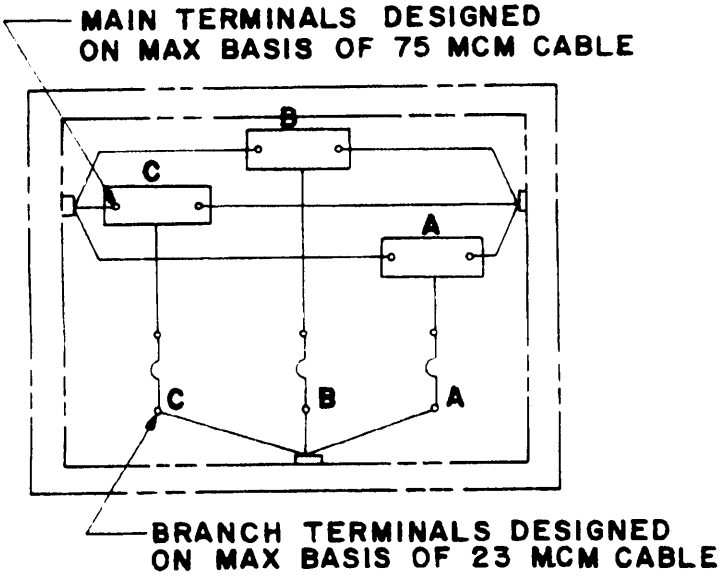

C. One 3-phase branch
(Symbol 691.1)

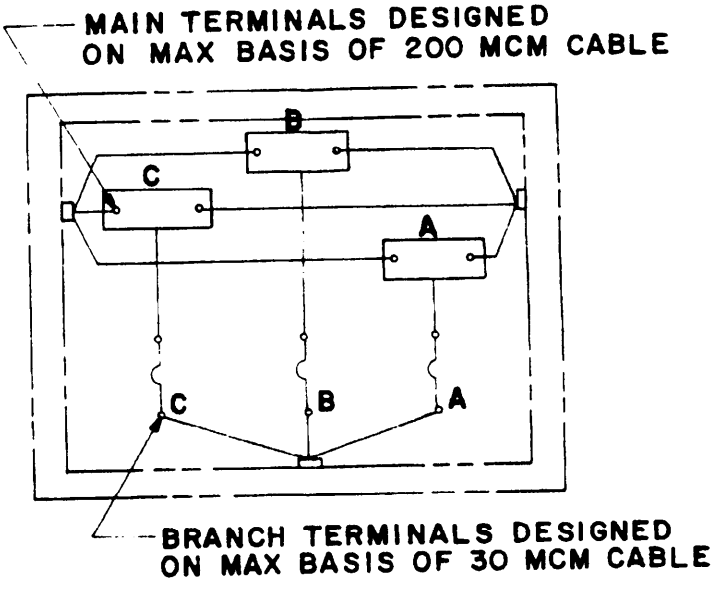

D. One 3-phase branch
(Symbol 692.1)

SH 131553

FIGURE 5. Wiring diagrams. (12) (13) (14) (15)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T00:35Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Symbol numbers: See table I.

Design:
Electrical rating: 250 volts alternating current, 0-30, and 31-60 ampere, 60 hertz.
Dimensions and configuration: See figures 1, 2, 3 and 4.
Wiring diagrams: See figure 5.
Mounting dimensions: See figure 3.
Degree of enclosure: Submersible (15 feet).
Designation and marking: See MIL-F-24646(SH).
Parts: The parts listed in table II and specified in MIL-F-24646(SH) shall be used in the construction of the fuse boxes specified herein.

General information:
Military part numbers and general information are as specified in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	Weight in pounds	No. of circuits	Feeder MCM	Branch MCM	Fuse size	Bus bar size	Supersedes	
								Drawing no.	Type
M24646/15-001	685.1	10.0	1	75	14	0-30A	0.75 x 0.12	9-S-74183	F-47A
M24646/15-002	686.1		1	75	40	31-60A	.75 x .12	9-S-74185	F-48A
M24646/15-003	691.1		1	75	23	0-30A	.75 x .12	9-S-74189	F-25A
M24646/15-004	692.1		1	200	30	31-60A	.75 x .12	9-S-74190	F-27A

Source: https://assist.dla.mil -- Downloaded: 20260-20T00:35Z
Check the source to verify that this is the current version before use.

be communicated in writing not later 14 November shall

TABLE II. Parts list.

Item no. 1/	Description	QTY M /-				Material/spec	Remarks
		001	002	003	004		
01	Fuse box assembly (sym 685.1)	-				MIL-F-24646/15	See figure 1
02	Fuse box assembly (sym 686.1)		-			MIL-F-24646/15	See figure 1
03	Fuse box assembly (sym 691.1)			-		MIL-F-24646/15	See figure 1
04	Fuse box assembly (sym 692.1)				-	MIL-F-24646/15	See figure 1
2/05	Enclosure (6 x 9 x 4.5)	1				M24142/3-001	See figure 2
2/06	Enclosure (10 x 10 x 3)			1		M24142/6-003	See figure 2
2/07	Enclosure (12 x 13 x 4)				1	M24142/6-008	See figure 2
08	Fuse block assembly	1				MIL-F-24646/15	See figure 4
09	Fuse block assembly		1			MIL-F-24646/15	See figure 4
10	Fuse block assembly			1		MIL-F-24646/15	See figure 4
11	Fuse block assembly				1	MIL-F-24646/15	See figure 4
12	Wiring diagram	1				MIL-E-2036	See figure 5
13	Wiring diagram		1			MIL-E-2036	See figure 5
14	Wiring diagram			1		MIL-E-2036	See figure 5
15	Wiring diagram				1	MIL-E-2036	See figure 5
16	Fuse clip (0-30A)	4	-	6	-	M21346/1-06	----
17	Fuse clip (31-60A)	-	4	-	6	M21346/1-08	----
18	Main terminal assembly	2	2	3	3	NAVSEA/SHIPS 9000-S-6202-73246	----
19	Identification plate	1	1	1	1	Brass, QQ-B-613	----
20	Information plate	1	1	3	2	Brass, QQ-B-613	----

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Enclosure is same as MIL-E-24142/3/6(SH), except for inside depth.

Preparing activity:
Navy - SH
(Project 5920-N163-15)

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:35Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:35Z
Check the source to verify that this is the current version before use.