INCH-POUND
MIL-DTL-24646/18C
29 January 2015
SUPERSEDING
MIL-DTL-24646/18B
29 October 2008

DETAIL SPECIFICATION SHEET

FUSE BOXES, BRANCH JUNCTION, SUBMERSIBLE, (15 FEET), 125 VOLTS, TWO CONDUCTORS, 0-30 AMPERE MIDGET FUSES SYMBOLS 671.1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24646.

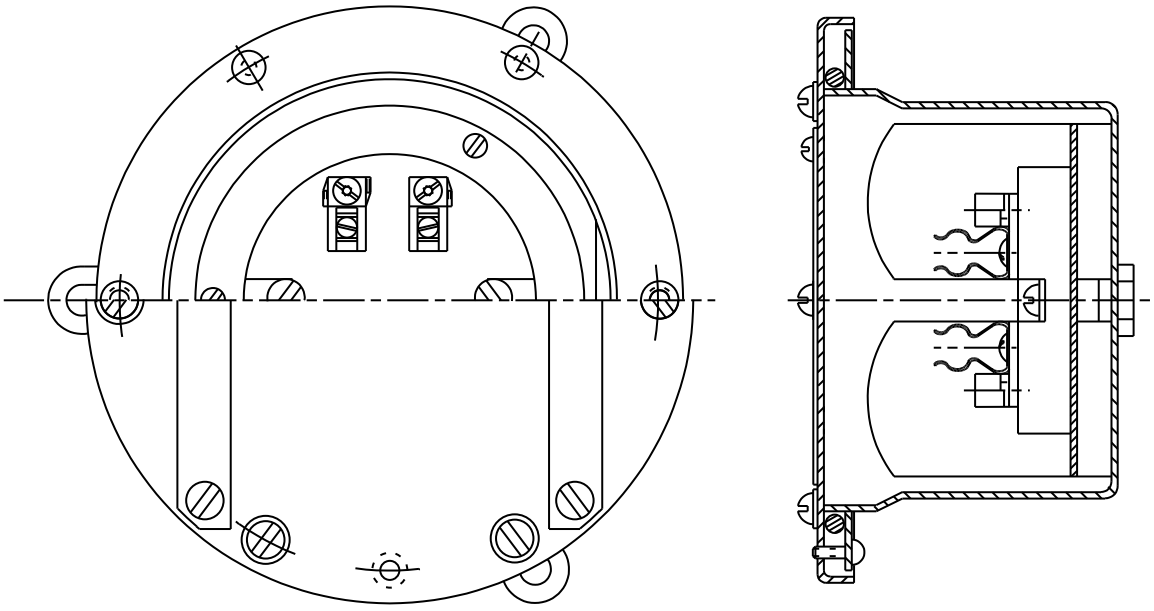


FIGURE 1. Fuse box assembly, typical. Item No. 01
(Symbol 671.1 shown)

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.

AMSC N/A
FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:36Z
Check the source to verify that this is the current version before use.

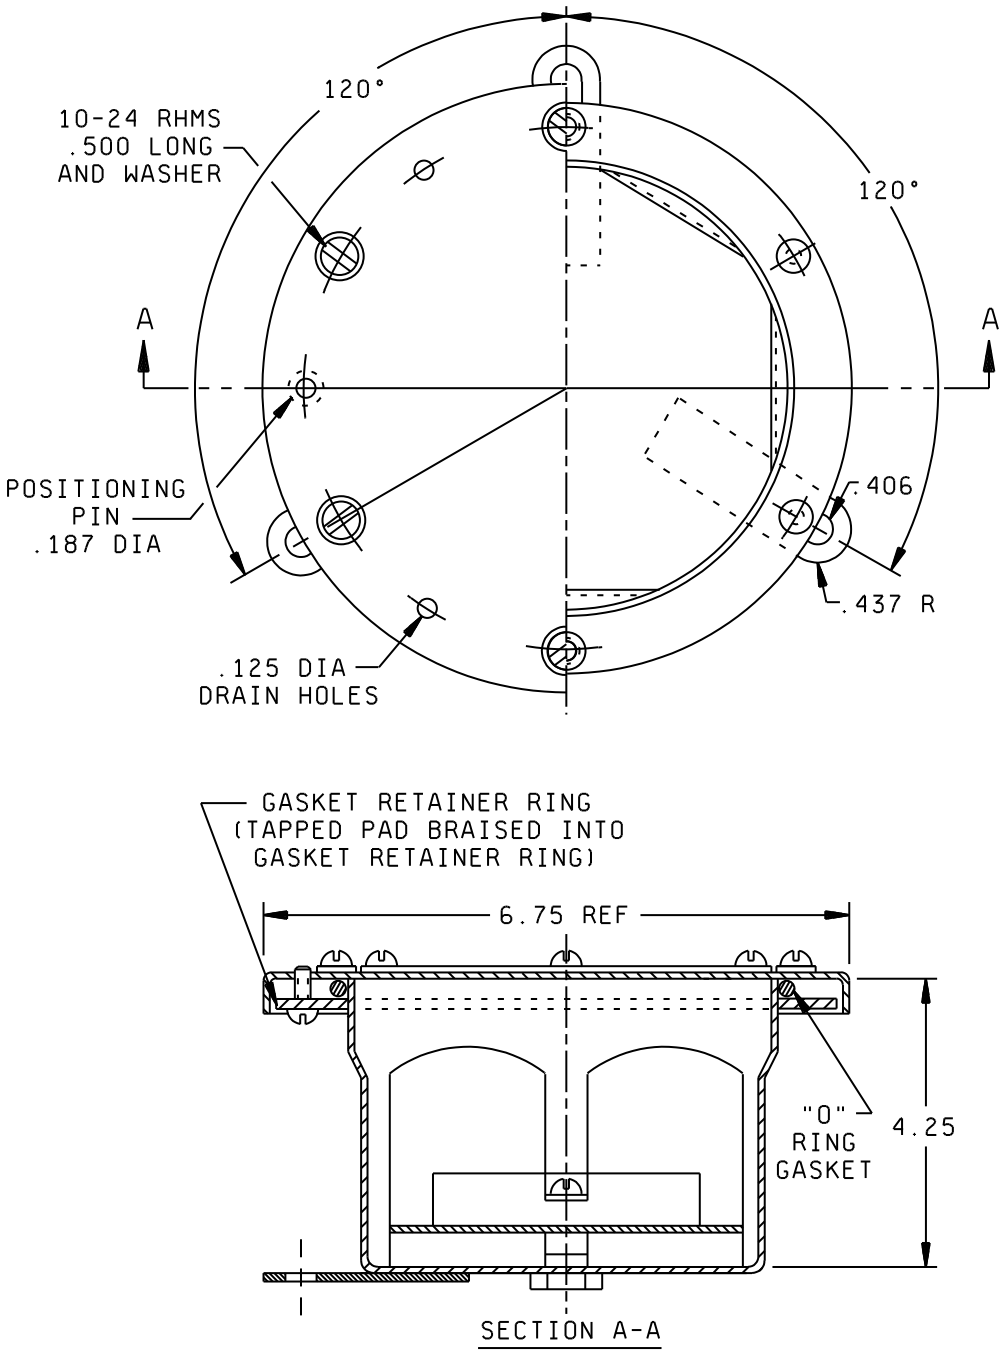


FIGURE 2. Enclosure, overall dimensions.
(Symbol 671.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:36Z
Check the source to verify that this is the current version before use.


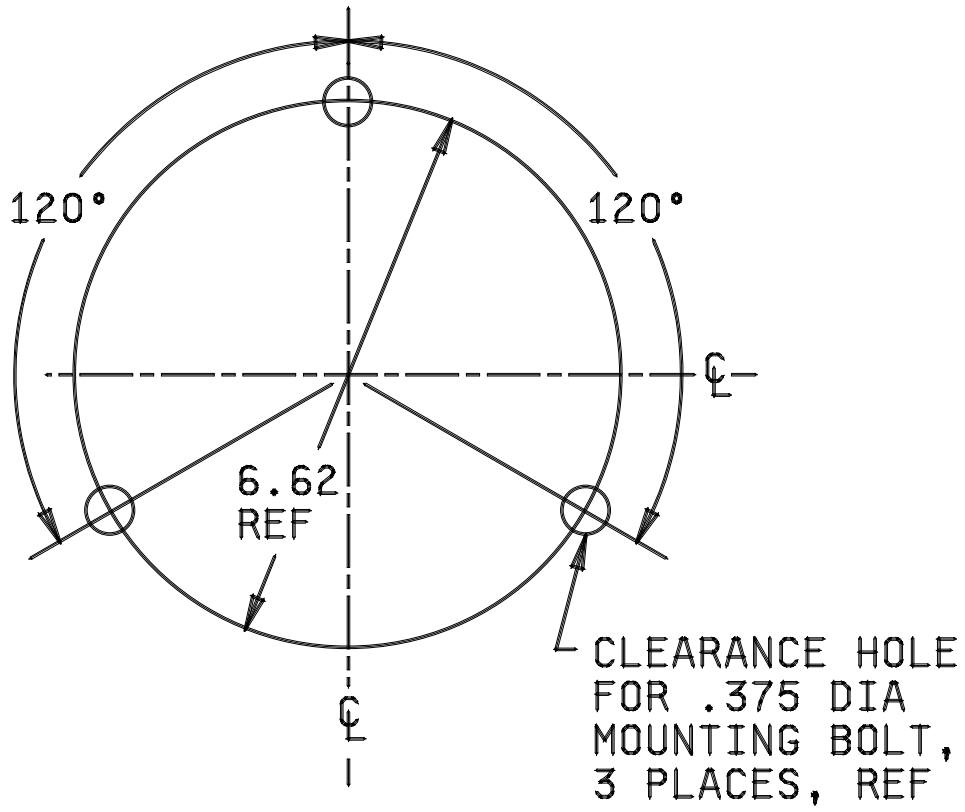


FIGURE 3. Mounting dimensions, ref.
(Symbols 671.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:36Z
Check the source to verify that this is the current version before use.

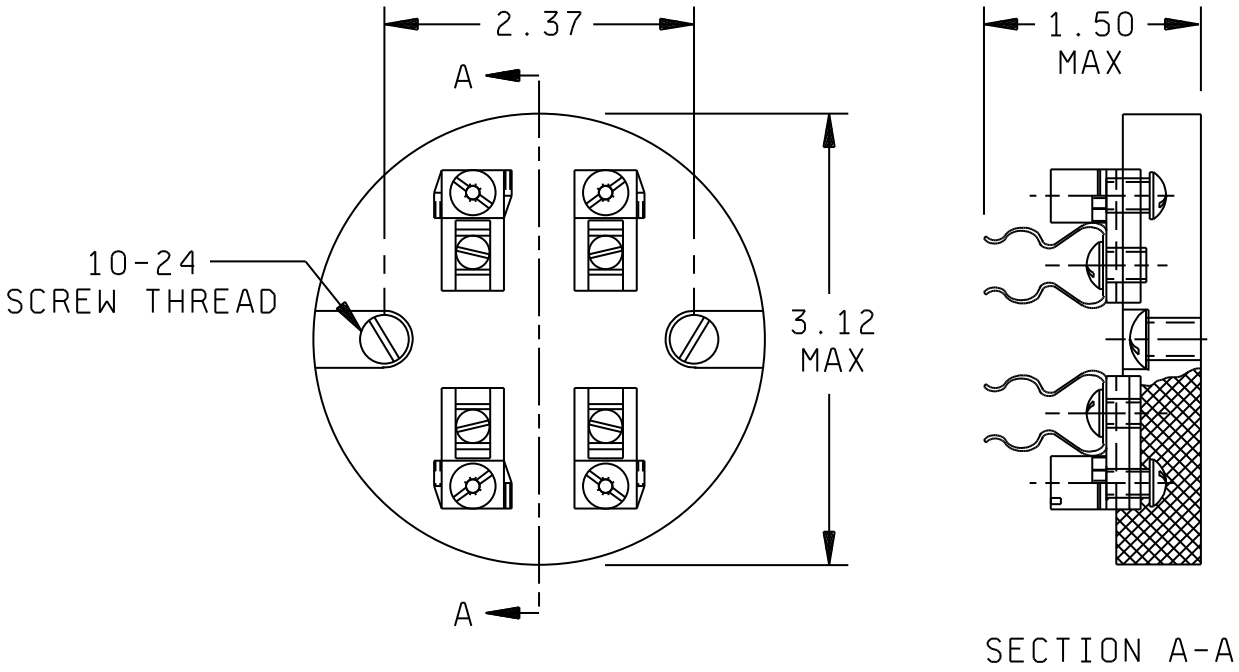

Fuse clip shall be installed in the orientation shown.

FIGURE 4. Fuse block assembly, typical. Item No. 03
(Symbols 671.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Symbol numbers: See table I.

Design:

Electrical rating: 125 volts, 0-30 ampere.
Dimensions and configuration: See figures 1, 2, 3 and 4.
Wiring diagrams: See figure 5.
Mounting dimensions: See figure 3.
Degree of enclosure: Submersible (15 feet).
Designation and marking: See MIL-DTL-24646.
Parts: The parts listed in table II and specified in MIL-DTL-24646 shall be used in the construction of the fuse boxes specified herein.

General information:
Military part numbers and general information is as specified in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	Approx. Weight in pounds 1/	No. of circuits	Feeder MCM	Branch MCM	Fuse size	Bus bar size	Supersedes	
								Drawing no.	Type
M24646/18-001	671.1	3.5	1	---	---	0-30A	0.50 x 0.25	9000-S-6202-74028	-

1/ The weight of these fuse boxes may vary + or - 15 percent.

TABLE II. Parts list.

Item no. 1/	Description	QTY M /- 001	Material/ specification	Remarks
01	Fuse box assembly (sym 671.1)	-	MIL-DTL-24646/18	See figure 1
02	Enclosure (5R)	1	M24142/5-003	See figure 2
03	Fuse block assembly	1	MIL-DTL-24646/18	See figure 4
04	Fuse clip (midget 0-30A)	4	A-A-55507/01-04	N/A
05	Identification plate	1	Brass, ASTM B36/B36M B121/B121M	N/A
06	Information plate	1	Brass, ASTM B36/B36M B121/B121M	N/A

1/ Item numbers after the figure titles are the same as the item numbers shown in this table.

Referenced documents. In addition to MIL-DTL-24646, this document references the following:

ASTM B36/B36M ASTM B121/B121M

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:36Z
Check the source to verify that this is the current version before use.

The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - SH
DLA - CC

Preparing activity:
DLA - CC

(Project 5920-2015-011)

NOTE: the activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:36Z
Check the source to verify that this is the current version before use.