MILITARY SPECIFICATION SHEET

FUSE BOXES, FEEDER DISTRIBUTION, SUBMERSIBLE (15 FEET), 250 VOLTS, ALTERNATING CURRENT, SINGLE PHASE BUSES, 0-30 AMPERE FUSES, SYMBOLS 555.1, 556.1, 557.1, 558.1 AND 559.1

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuse boxes described herein shall consist of this document and the latest issue of MIL-F-24646(SH).

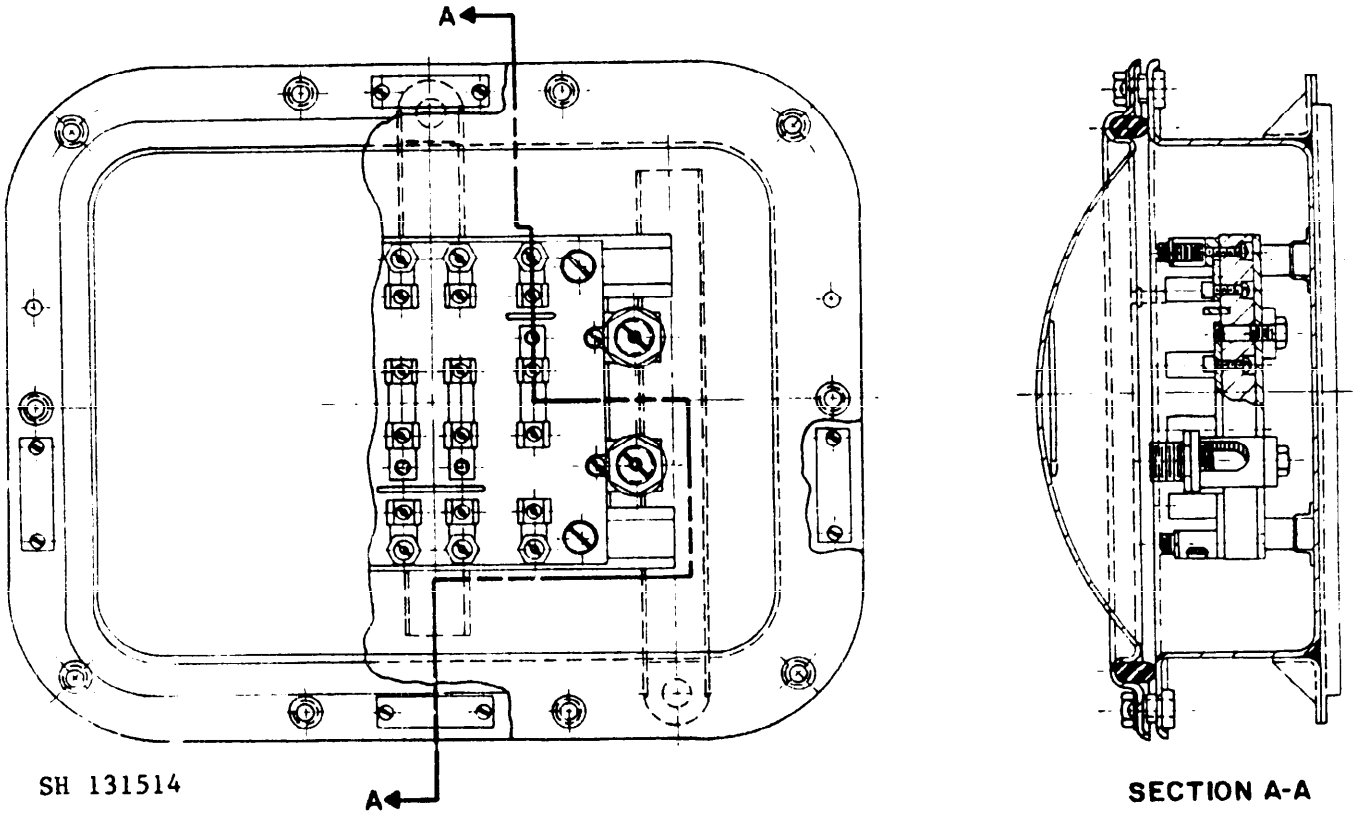


FIGURE 1. Fuse box assembly, typical. 01 02 03 04 05
(Symbol 556.1 shown)


NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:32Z
Check the source to verify that this is the current version before use.


SYMBOL NO	DIMENSIONS(REF) A	B	C
555.1	13.38	13.38	5.47
556.1	16.38	13.38	5.47
557.1	19.38	13.38	5.47
558.1	21.38	13.38	5.47
559.1	27.38	15.38	5.47

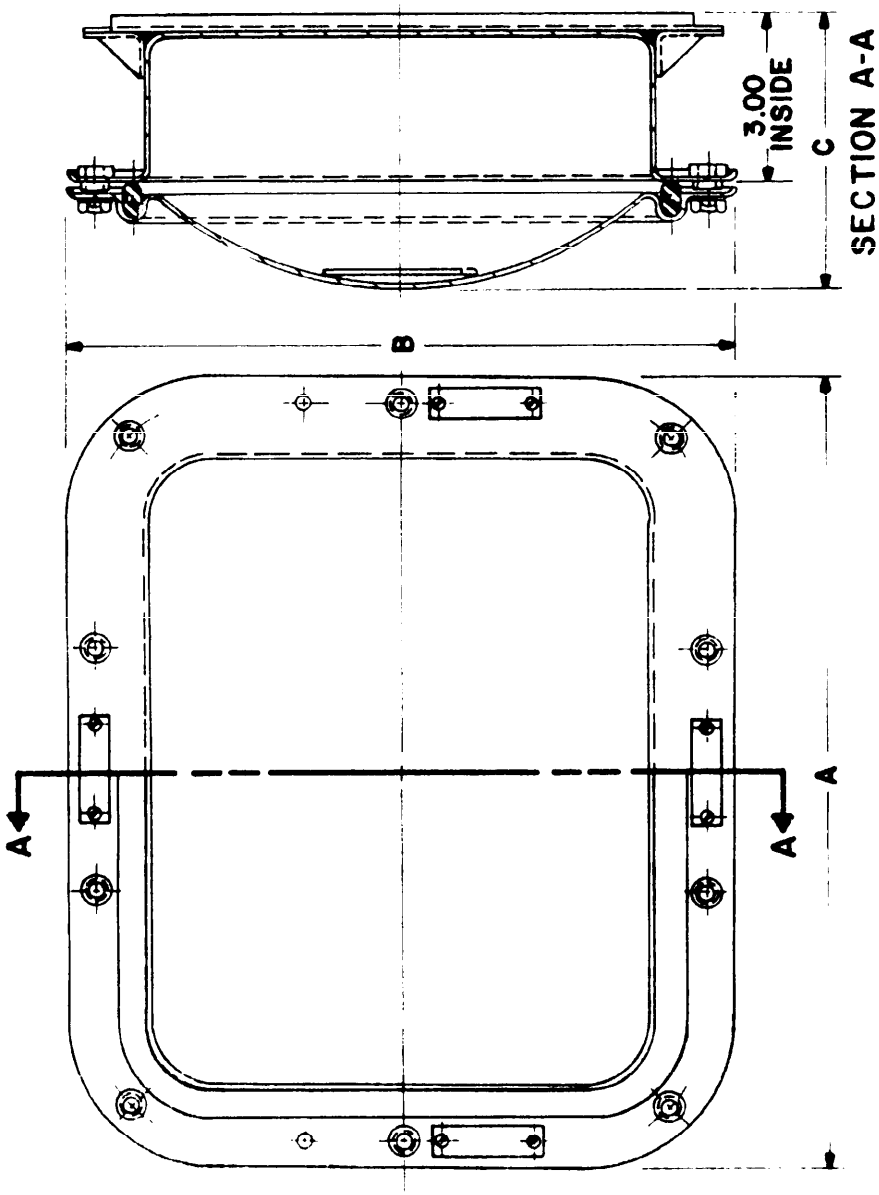

SH 131515


FIGURE 2. Enclosure, overall dimensions. (06) (07) (08) (09) (10)
(Symbols 555.1, 556.1, 557.1, 558.1 and 559.1)

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:32Z
Check the source to verify that this is the currentversion before use.

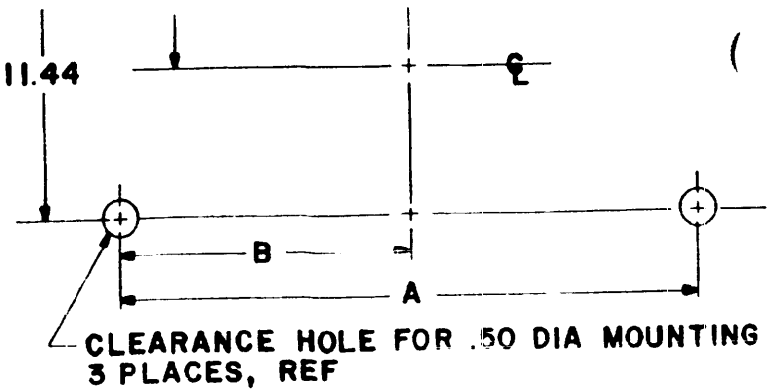

NO	A	B
555.1	5.75	2.88
556.1	9.25	4.88
557.1	11.75	5.88
558.1	14.25	7.12

A. Symbols 555.1, 556.1, 557.1, and 558.1

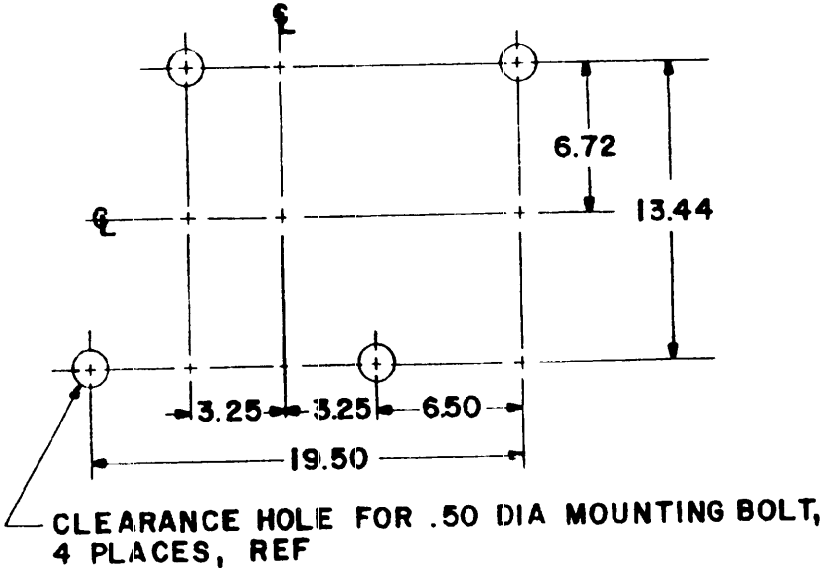


B. Symbol 559.1

SH 131516

FIGURE 3. Mounting dimensions, ref.

Source: https://assist.dla.mil -- Downloaded: 2026/10-20T00:32Z
Check the source to verify that this is the current version before use.

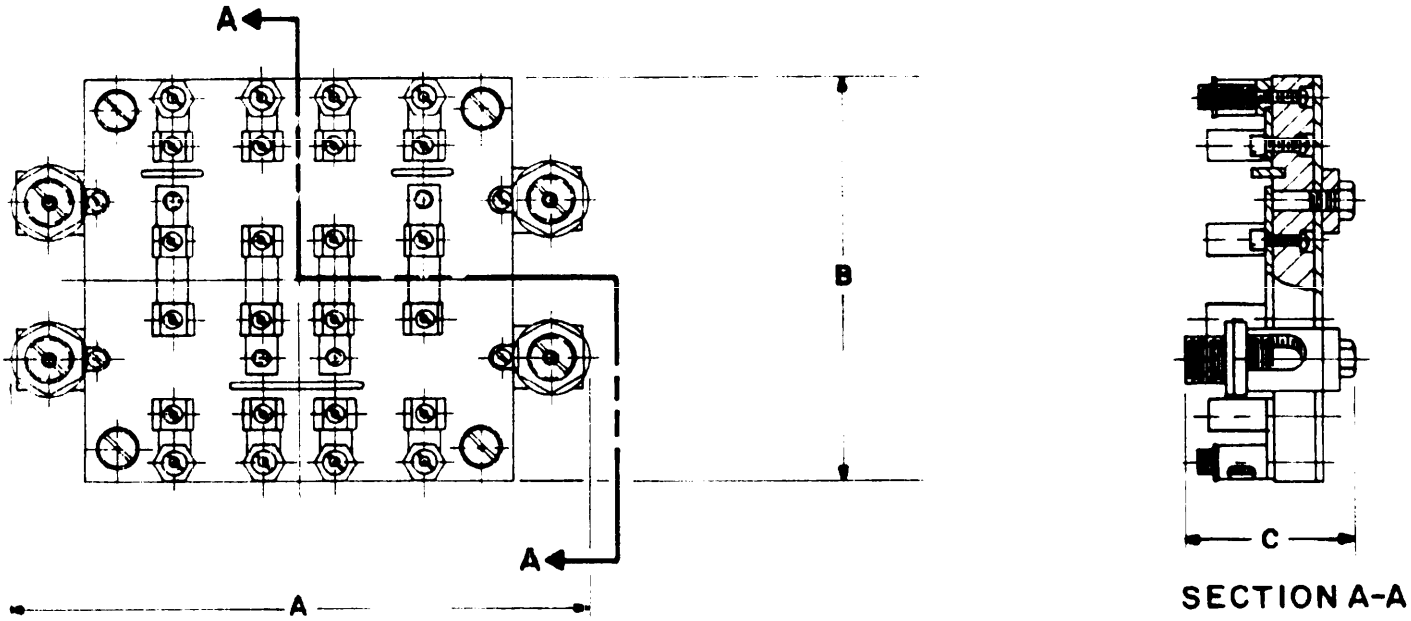


SYMBOL NO	DIMENSIONS (MAX)		
	A	B	C
555.1	6.25	6.38	2.80
556.1	8.75	6.38	2.80
557.1	11.62	6.38	2.80
558.1	14.38	6.38	2.80
559.1	20.00	6.38	2.80

SH 131517


FIGURE 4. Fuse block assembly, typical. (11) (12) (13) (14) (15)

(Symbols 555.1, 556.1, 557.1, 558.1 and 559.1)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:32Z
Check the source to verify that this is the current version before use.

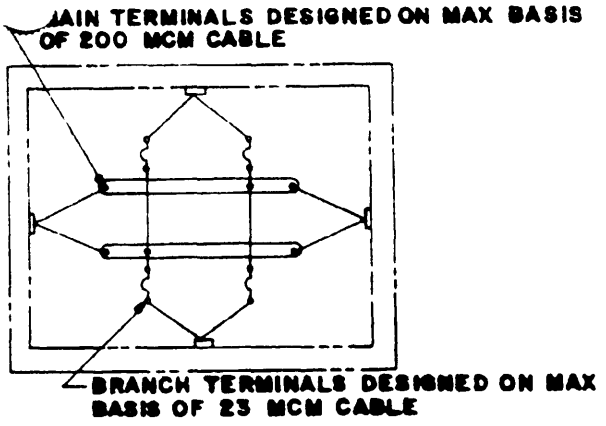


A. Two single-phase branches (Symbol 555.1)

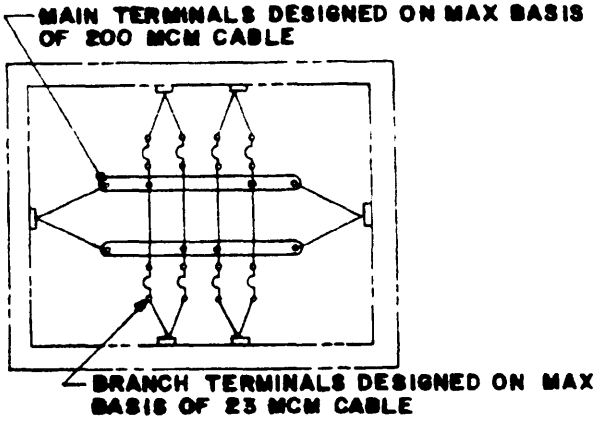


B. Four single-phase branches (Symbol 556.1)

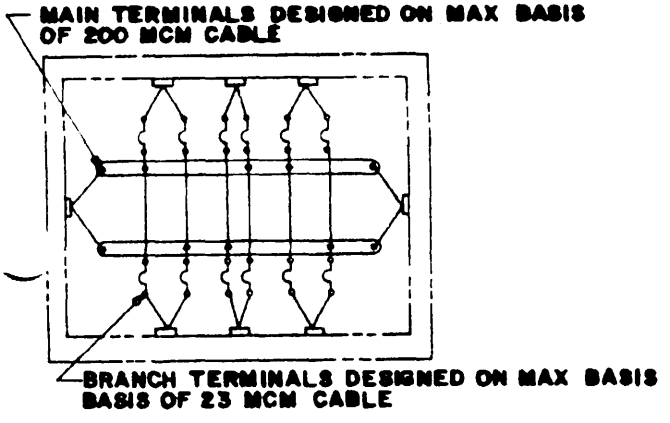

C. Six single-phase branches (Symbol 557.1)

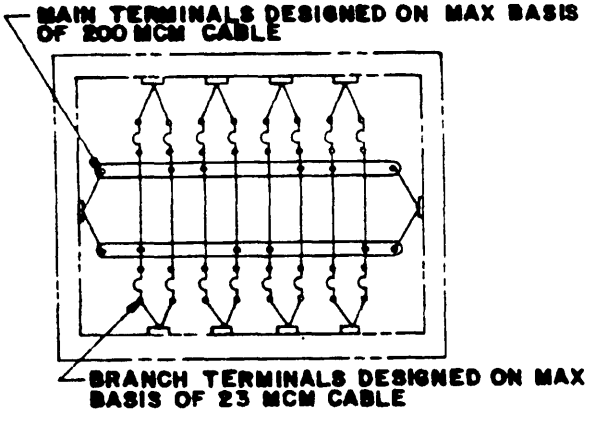

D. Eight single-phase branches (Symbol 558.1)

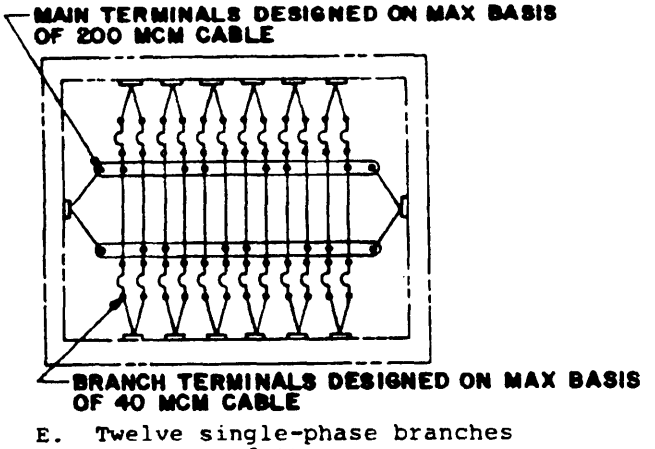

E. Twelve single-phase branches (Symbol 559.1)

SH 131518

FIGURE 5. Wiring diagrams. (16) (17) (18) (19) (20)

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:32Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Symbol numbers: See table I.

Design:

Electrical rating: 250 volts alternating current, 0-30 ampere, 60 hertz.
Dimensions and configuration: See figures 1, 2, 3 and 4.
Wiring diagrams: See figure 5.
Mounting dimensions: See figure 3.
Degree of enclosure: Submersible (15 feet).
Designation and marking: See MIL-F-24646(SH).
Parts: The parts listed in table II and specified in MIL-F-24646(SH) shall be used in the construction of the fuse boxes specified herein.

General information:

Military part numbers and general information are as specified in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	Weight in pounds	No. of circuits	Feeder MCM	Branch MCM	Fuse size	Bus bar size	Supersedes	
								Drawing no.	Type
M24646/9-001	555.1	20.5	2	200	23	0-30A	1.00 x 0.25	9000-S-74165	F-8A
M24646/9-002	556.1	26.2	4	200	23	0-30A	1.00 x .25	9000-S-74166	F-2A
M24646/9-003	557.1	31.0	6	200	23	0-30A	1.00 x .25	9000-S-74167	F-4A
M24646/9-004	558.1	35.0	8	200	23	0-30A	1.00 x .25	9000-S-74168	F-6A
M24646/9-005	559.1	54.8	12	200	40	0-30A	1.00 x .25	9000-S-74169	F-10A

Source: https://assist.dla.mil -- Downloaded: 20260-20T00:32Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	QTY M /- 001	002	003	004	005	Material/spec	Remarks
01	Fuse box assembly (sym 555.1)	-					MIL-F-24646/9	See figure 1
02	Fuse box assembly (sym 556.1)		-				MIL-F-24646/9	See figure 1
03	Fuse box assembly (sym 557.1)			-			MIL-F-24646/9	See figure 1
04	Fuse box assembly (sym 558.1)				-		MIL-F-24646/9	See figure 1
05	Fuse box assembly (sym 559.1)					-	MIL-F-24646/9	See figure 1
2/06	Enclosure (10 x 10 x 3)	1					M24142/6-003	See figure 2 Type A mod
2/07	Enclosure (10 x 13 x 3)		1				M24142/6-004	See figure 2 Type A mod
2/08	Enclosure (10 x 16 x 3)			1			M24142/6-005	See figure 2
3/	Enclosure (10 x 18 x 3)			1			M24142/6-006	Type A mod
2/09	Enclosure (10 x 18 x 3)				1		M24142/6-006	See figure 2 Type A mod
2/10	Enclosure (12 x 24 x 3)					1	M24142/6-010	See figure 2 Type A mod
11	Fuse block assembly	1					MIL-F-24646/9	See figure 4
12	Fuse block assembly		1				MIL-F-24646/9	See figure 4
13	Fuse block assembly			1			MIL-F-24646/9	See figure 4
14	Fuse block assembly				1		MIL-F-24646/9	See figure 4
15	Fuse block assembly					1	MIL-F-24646/9	See figure 4
16	Wiring diagram	1					MIL-E-2036	See figure 5
17	Wiring diagram		1				MIL-E-2036	See figure 5
18	Wiring diagram			1			MIL-E-2036	See figure 5
19	Wiring diagram				1		MIL-E-2036	See figure 5
20	Wiring diagram					1	MIL-E-2036	See figure 5
21	Fuse clip (0-30A)	8	16	24	32	48	M21346-06	----
22	Identification plate	1	1	1	1	1	Brass, QQ-B-613	----
23	Information plate	2	4	6	8	12	Brass, QQ-B-613	----

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.

2/ Enclosure is same as MIL-E-24142/6(SH), except for inside depth which is 3 inches instead of 5 inches shown.

3/ Enclosure M24142/6-006 may be used as an alternate. Mounting channel spacing will be maintained same as enclosure M24142/6-005.

Preparing activity:
Navy - SH
(Project 5920-N163-9)

Source: https://assist.dla.mil -- Downloaded: 202640-20T00:32Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:32Z
Check the source to verify that this is the current version before use.