
MILITARY SPECIFICATION SHEET

FUSE BOXES, FEEDER DISTRIBUTION, WITH SWITCHES, WATERTIGHT (3 FEET), 125 VOLTS, ALTERNATING CURRENT, SINGLE OR THREE PHASE BUSES, SINGLE PHASE BRANCHES, INTERLOCKING FUSE COVER, 0-30 AMPERE FUSES, AND SNAP SWITCHES, SYMBOLS 644 AND 648

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuse boxes described herein shall consist of this document and the latest issue of MIL-F-24646(SH).

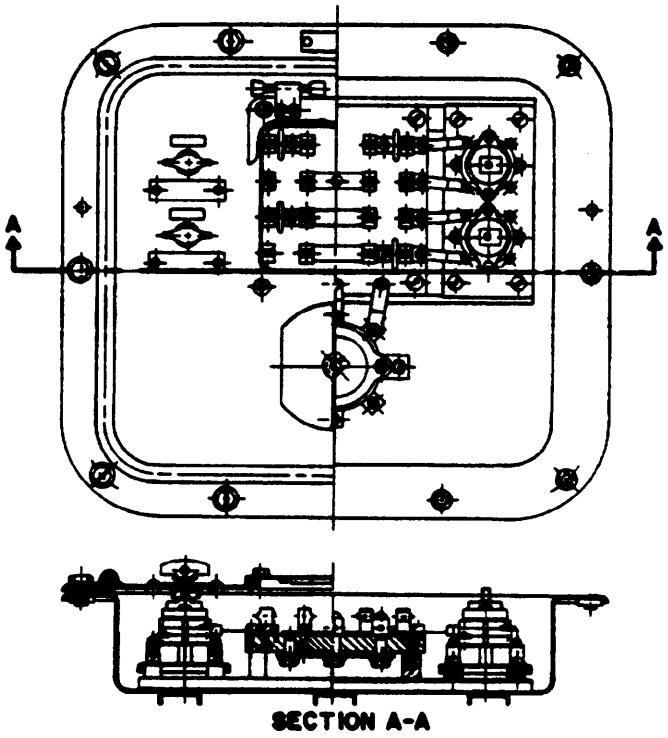

SH 131531


FIGURE 1. Fuse box assembly, typical. (01) (02)
(Symbol 648 shown)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.

FSC 6110


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.

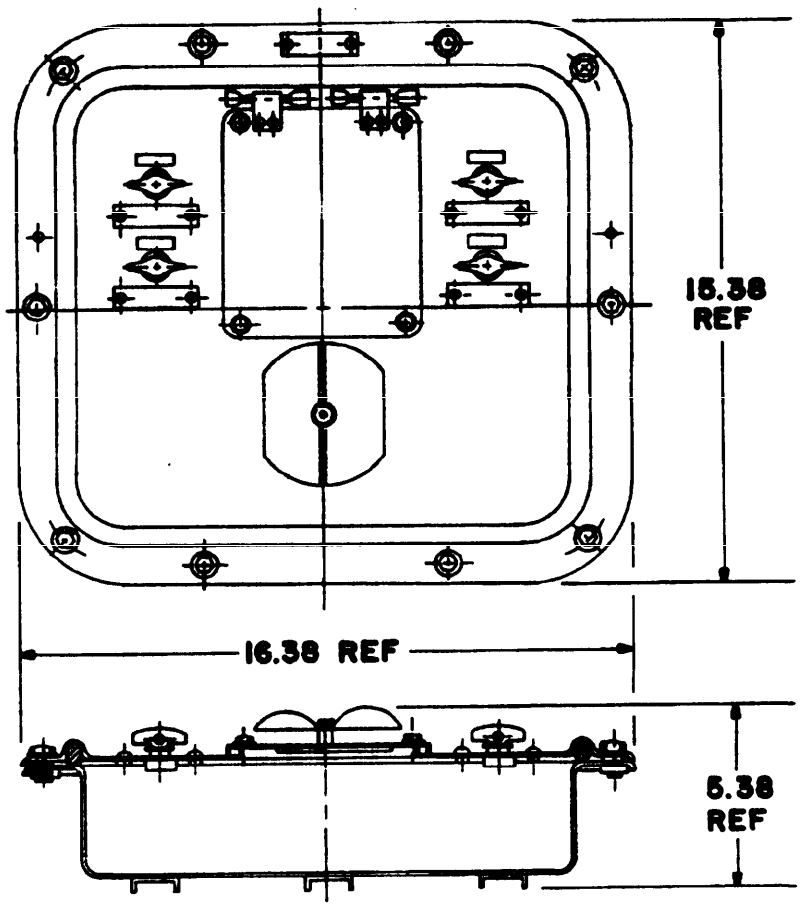

SH 131532

FIGURE 2. Enclosure, overall dimensions. (03)
(Symbols 644 and 648)


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.

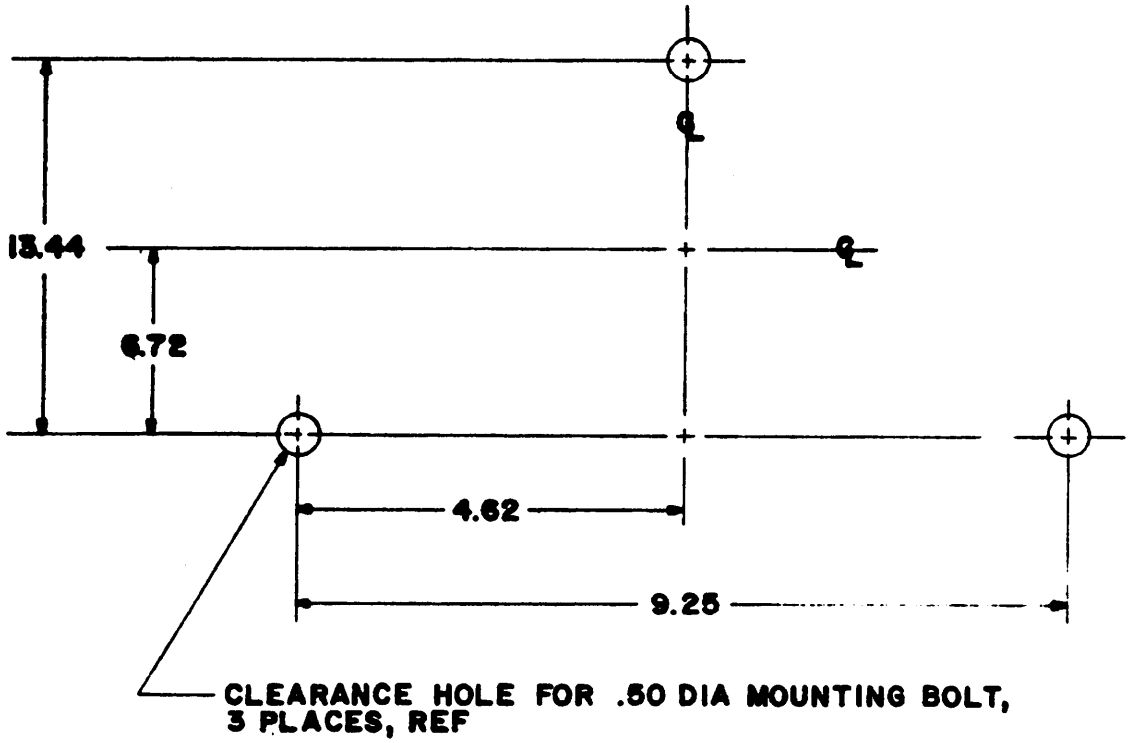

SH 131533

FIGURE 3. Mounting dimensions, ref.
(Symbols 644 and 648)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.

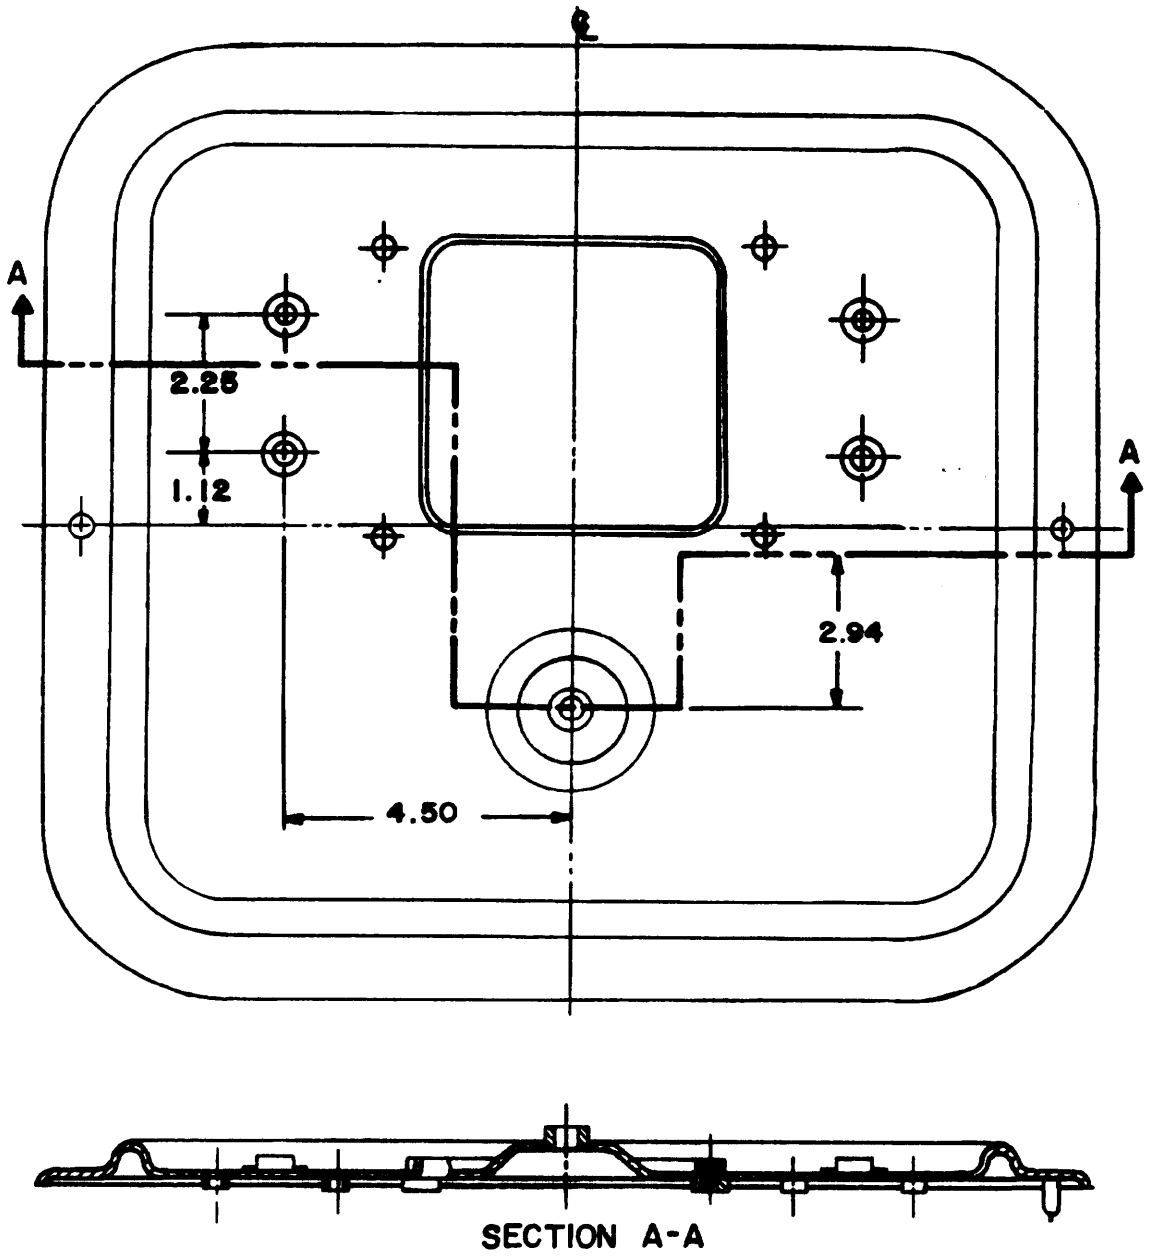

SH 131534

FIGURE 4. Cover assembly, typical.
(Symbols 644 and 648)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.



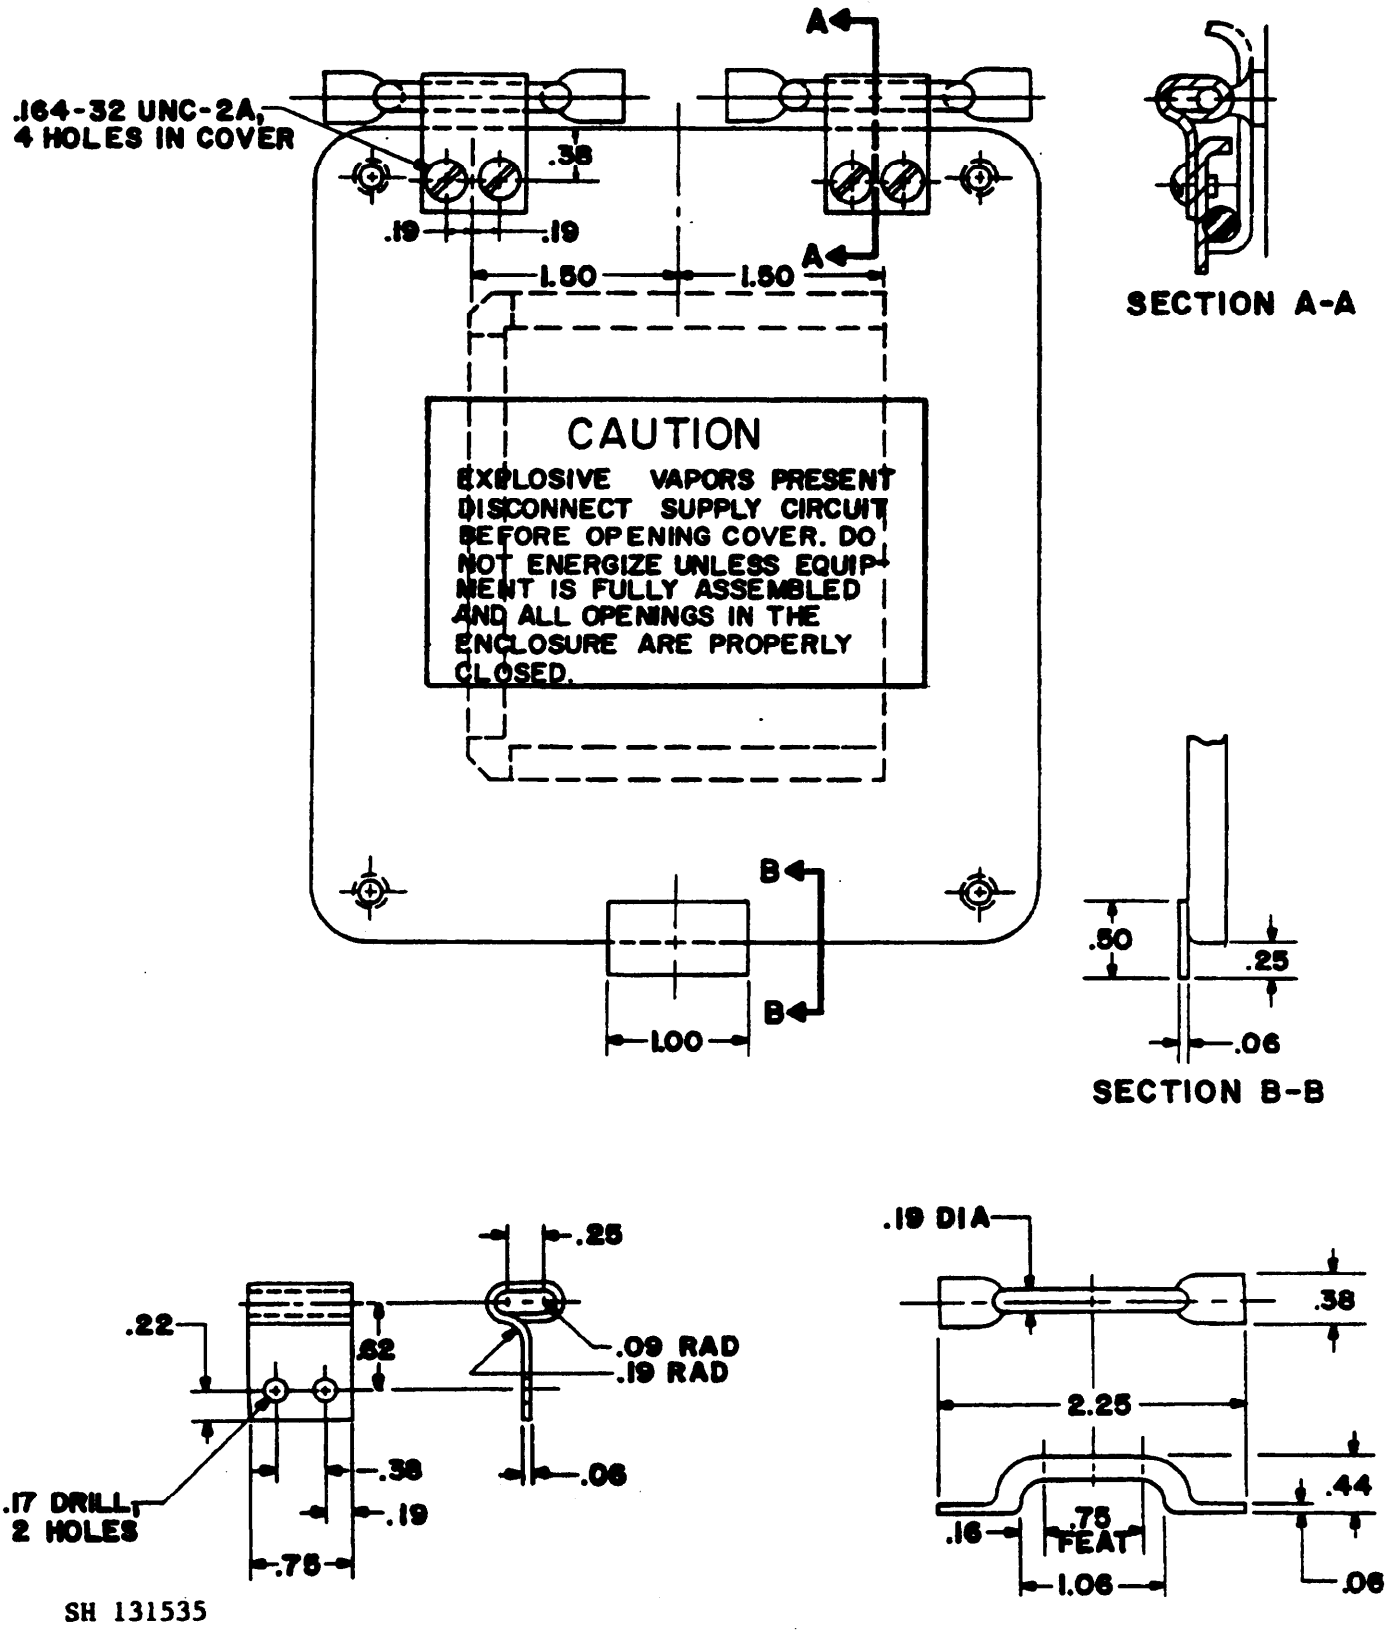


FIGURE 5. Fuse cover assembly, typical. (04)
(Symbols 644 and 648)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.

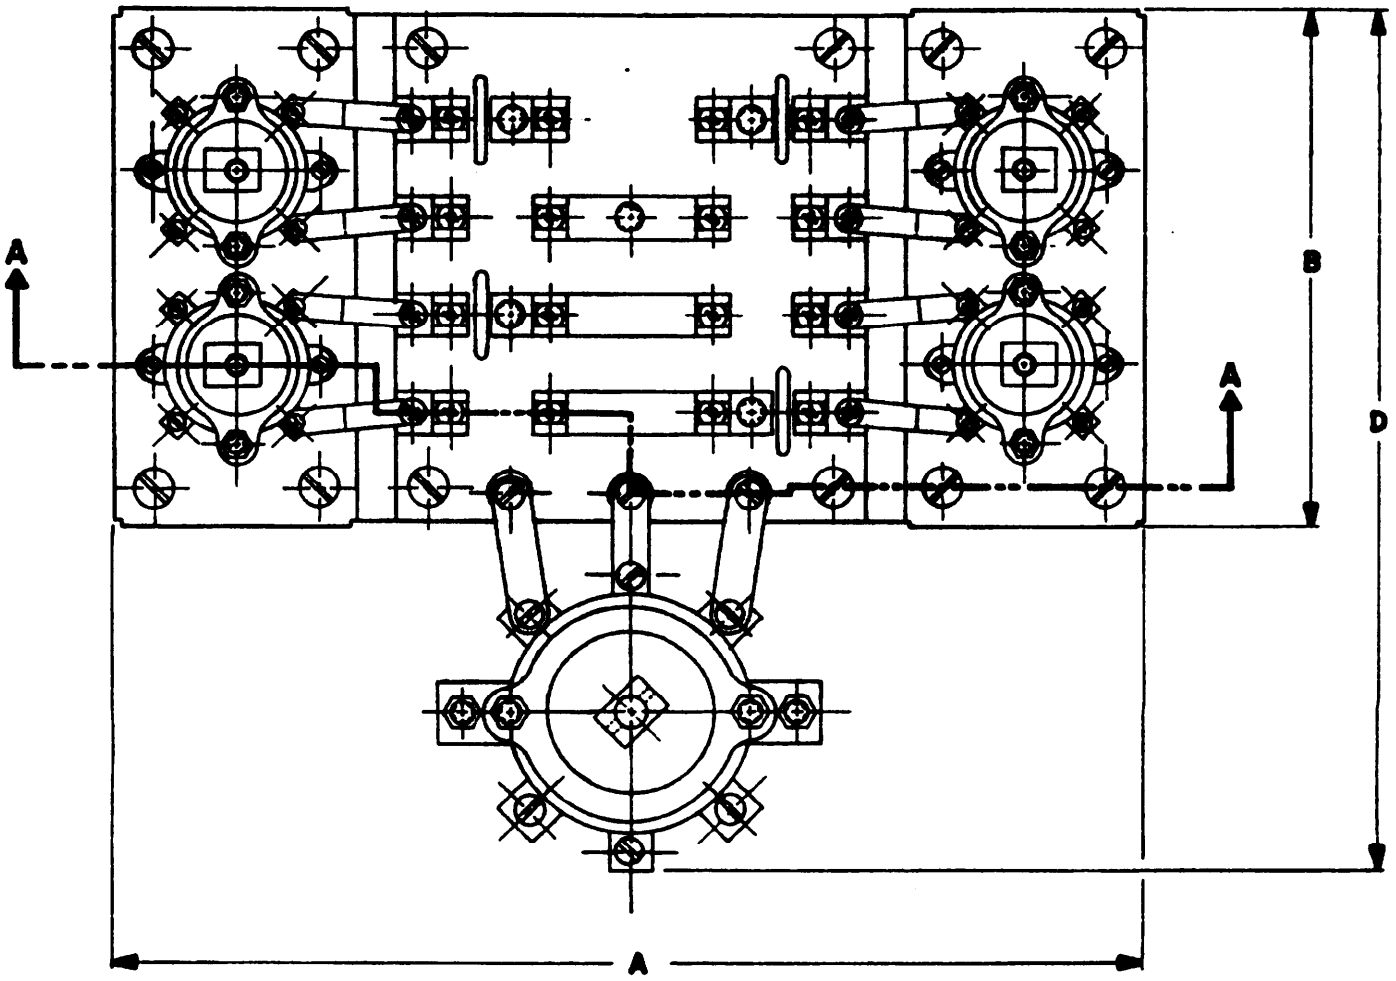

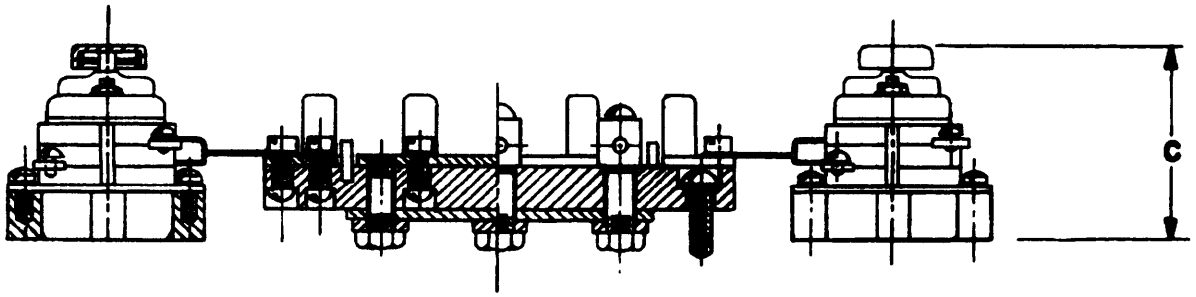


SECTION A-A

SYMBOL NO	DIMENSIONS (MAX)			
	A	B	C	D
644	11.75	5.88	2.00	10.54
648	11.75	5.88	2.00	10.54


SH 131536

FIGURE 6. Fuse block assembly, typical. (05) (06)
(Symbols 644 and 648)

Source: https://assist.dla.mil -- Downloaded: 20261-20T00:34Z
Check the source to verify that this is the current version before use.

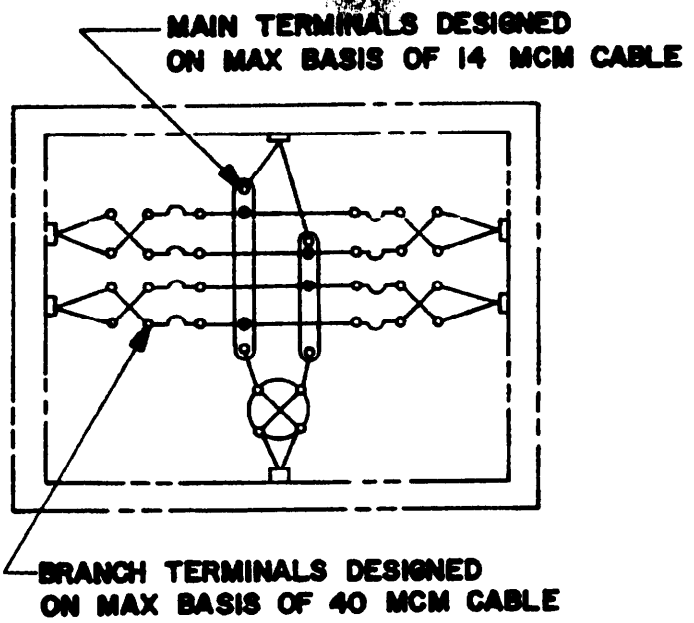

A. Four single-phase branches
(Symbol 644)

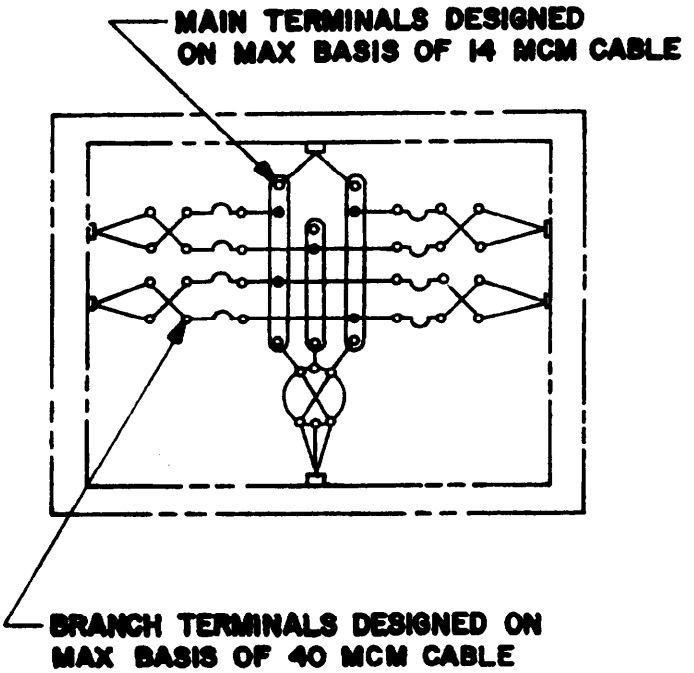

B. Four single-phase branches
(Symbol 648)

SH 131537

FIGURE 7. Wiring diagrams. (07) (08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Symbol numbers: See table I.

Design:
Electrical rating: 125 volts alternating current, 0-15 ampere, 60 hertz.
Dimensions and configuration: See figures 1, 2, 3, 4, 5 and 6.
Wiring diagrams: See figure 7.
Mounting dimensions: See figure 3.
Degree of enclosure: Watertight (3 feet).
Designation and marking: See MIL-F-24646(SH).
Parts: The parts listed in table II and specified in MIL-F-24646(SH) shall be used in the construction of the fuse boxes specified herein.

General information:
Military part numbers and general information are as specified in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	Weight in pounds	No. of circuits	Feeder MCM	Branch MCM	Fuse size	Bus bar size	Supersedes	
								Drawing no.	Type
M24646/12-001	644		4	14	4	0-30A	0.62 x 0.12	9000-S-6202-74195	D-2A
M24646/12-002	648		4	14	4	0-30A	.62 x .12	9000-S-6202-74198	0-16A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no.1/	Description	QTY M /- 001	002	Material/spec	Remarks
01	Fuse box assembly (sym 644)	-		MIL-F-24646/12	See figure 1
02	Fuse box assembly (sym 648)		-	MIL-F-24646/12	See figure 1
2/03	Enclosure (12 x 13 x 3)	1	1	3/M24142/6-008	See figure 2
04	Fuse cover assembly	1	1	MIL-F-24646/12	See figure 5
05	Fuse block and switch assembly	1		MIL-F-24646/12	See figure 6
06	Fuse block and switch assembly		1	MIL-F-24646/12	See figure 6
07	Wiring diagram	1		MIL-E-2036	See figure 7
08	Wiring diagram		1	MIL-E-2036	See figure 7
09	Fuse clip (0-30A)	16	16	M21346/1-04	----
10	Snap switch	4	4	M15291/3-002	Type 1SR2A4
11	Snap switch	1	-	M15291/7-002	Type 3SR2A4
12	Snap switch	-	1	M15291/7-005	Type 3SR3A4
13	Identification plate	1	1	Brass, QQ-B-613	----
14	Information plate	4	4	Brass, QQ-B-613	----
15	Switch information plate	4	4	Brass, QQ-B-613	----
4/16	Caution plate	-	1	Brass, QQ-B-613	----

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Enclosure is same as MIL-E-24142/6(SH), except for inside depth which is 3 inches instead of 5 inches shown.
3/ Enclosures shall be furnished with flat cover, (modified).
4/ Engrave as shown and fill with yellow enamel.

Preparing activity:
Navy - SH
(Project 6110-N264-3)

Source: https://assist.dla.mil -- Downloaded: 20260-20T00:34Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.