
MILITARY SPECIFICATION SHEET

FUSE BOXES, FEEDER DISTRIBUTION, SUBMERSIBLE (15 FEET), 500 VOLTS, ALTERNATING CURRENT, THREE PHASE BUSES, SINGLE AND THREE PHASE BRANCHES, 0-30 AMPERE FUSES WITH FUSE PULLER, SYMBOLS 568.1, 569.1, 570.1 AND 571.1

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fuse boxes described herein shall consist of this document and the latest issue of MIL-F-24646(SH).

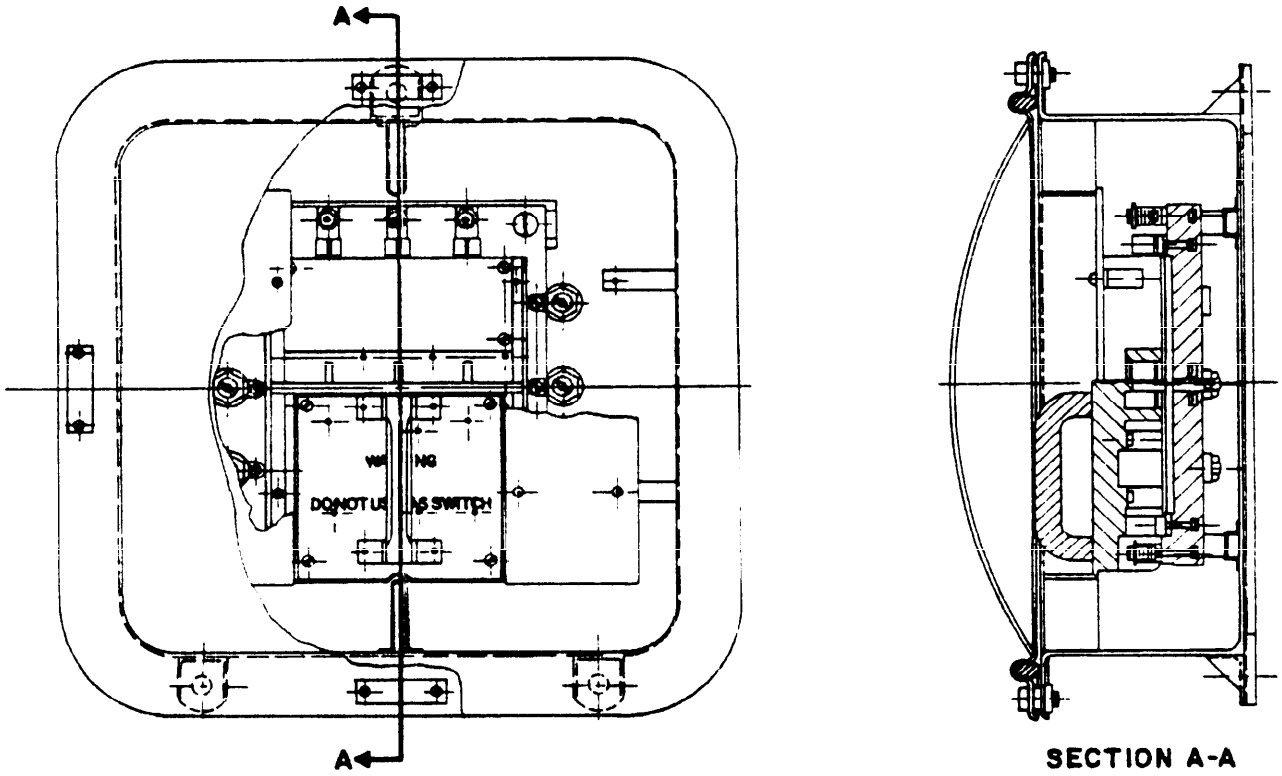

SH 131538

FIGURE 1. Fuse box assembly, typical. (01) (02) (03) (04)
(Symbol 569.1 shown)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified herein, tolerances shall be as follows:
   Two place decimals - plus or minus 0.02.
   Three place decimals - plus or minus 0.005.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.

SYMBOL NO	DIMENSIONS (REF)			
	A	B	C	D
568.1	19.38	17.38	7.44	5.00
569.1	17.38	17.38	7.44	5.00
570.1	23.38	17.38	7.44	5.00
571.1	29.38	17.38	7.44	5.00


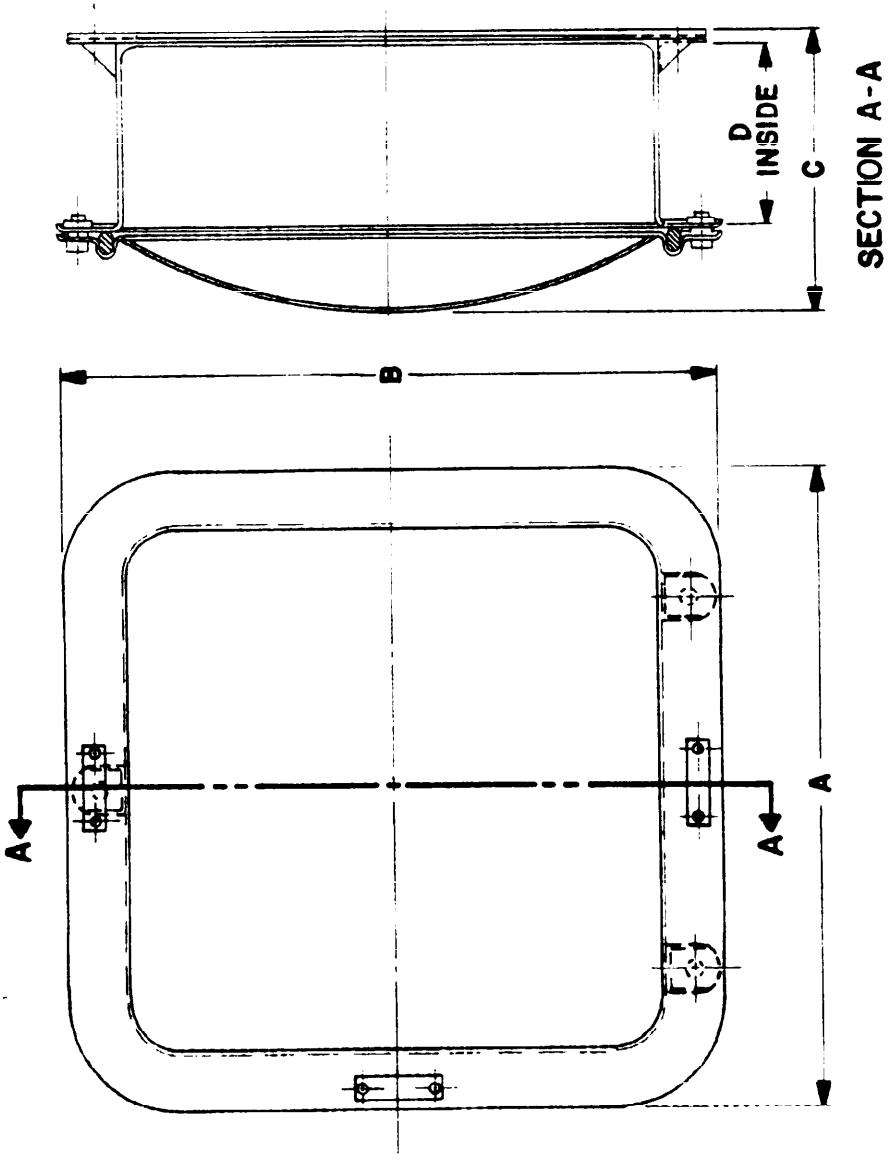


FIGURE 2. Enclosure, overall dimensions. (05) (06) (07) (08)

SH 131539

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.

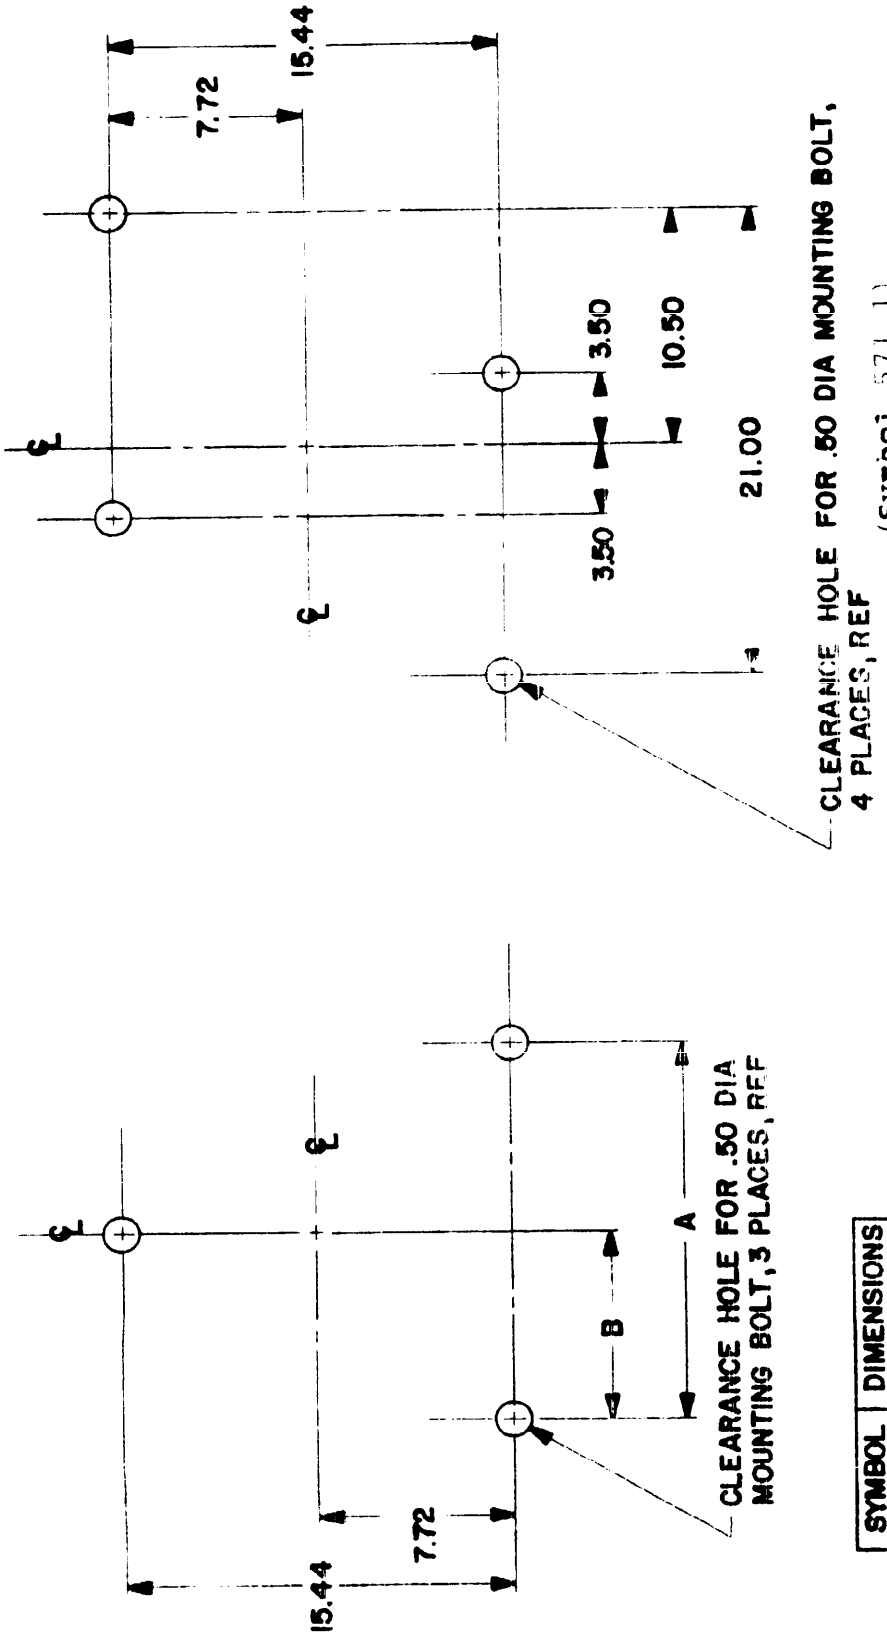


SYMBOL NO	DIMENSIONS A	B
568.1	12.25	16.12
569.1	10.25	5.12
570.1	16.00	8.00

FIGURE 3. Mounting dimensions, ref.

SH 131540

Source: https://assist.dla.mil -- Downloaded: 202610-20T00:34Z
Check the source to verify that this is the currentversion before use.

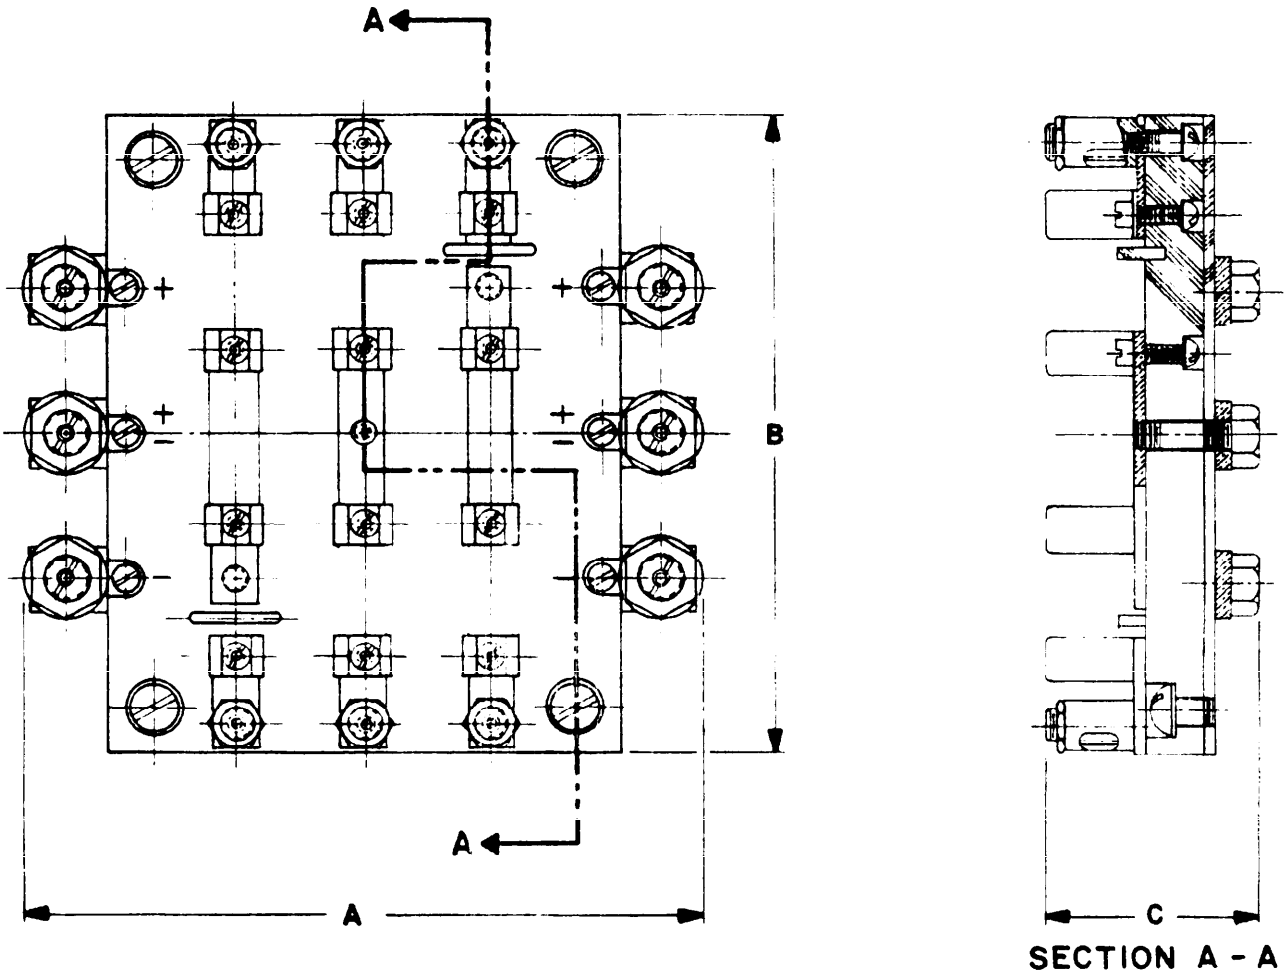


SYMBOL NO	DIMENSIONS (MAX)		
	A	B	C
568.1	11.12	9.50	2.75
569.1	9.12	9.50	2.75
570.1	14.62	9.50	2.75
571.1	20.12	9.50	2.75


SH 131541

FIGURE 4. Fuse block assembly, typical. (09) (10) (11) (12)
(Symbol 569.1 shown)


Source: https://assist.dla.mil -- Downloaded: 202610-20T00:34Z
Check the source to verify that this is the current version before use.

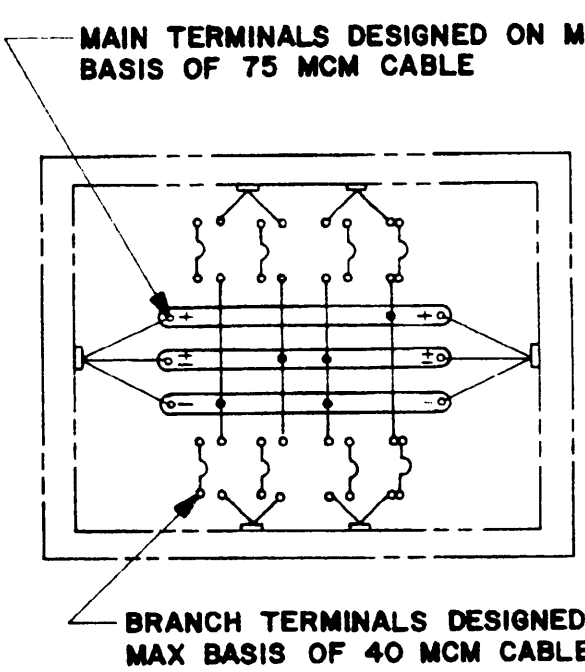


A. Four single-phase branches (Symbol 568.1)

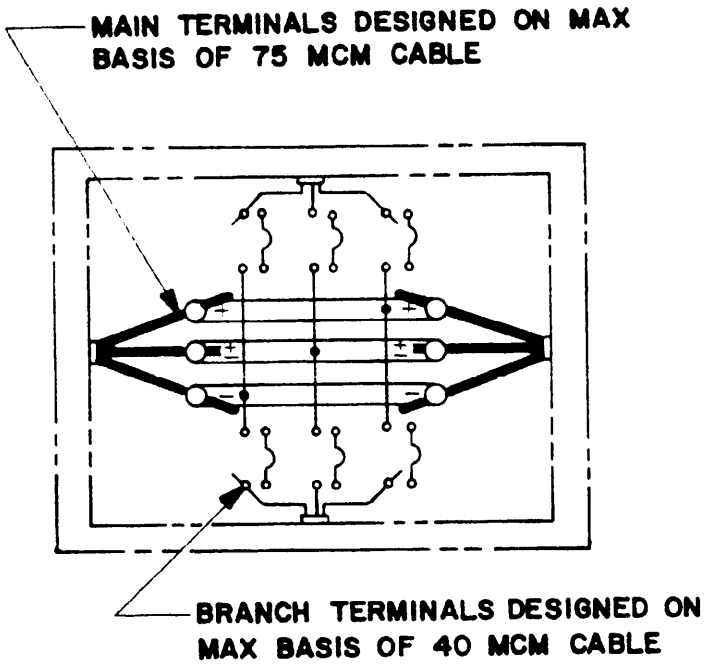

B. Two 3-phase branches (Symbol 569.1)

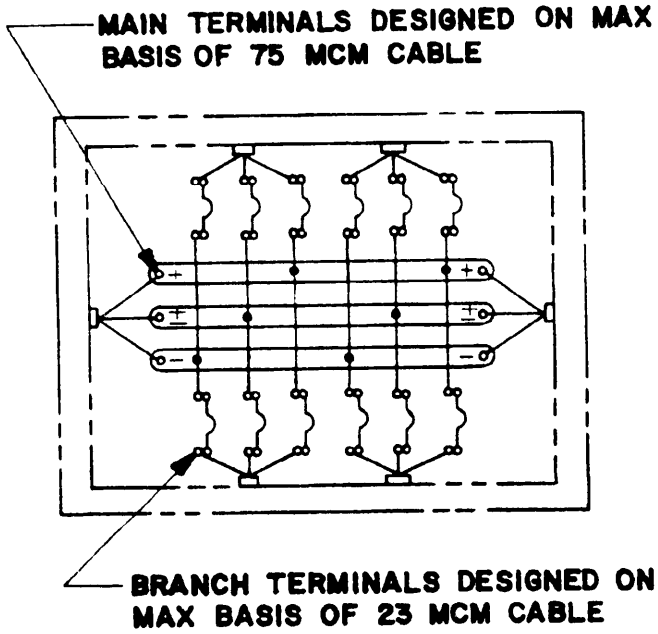

C. Four 3-phase branches (Symbol 570.1)

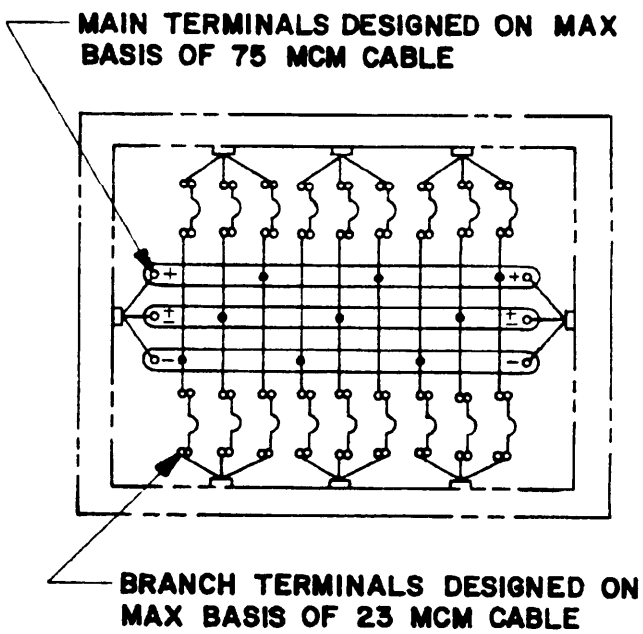


D. Six 3-phase branches (Symbol 571.1)

SH 131542

FIGURE 5. Wiring diagrams. (13) (14) (15) (16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.

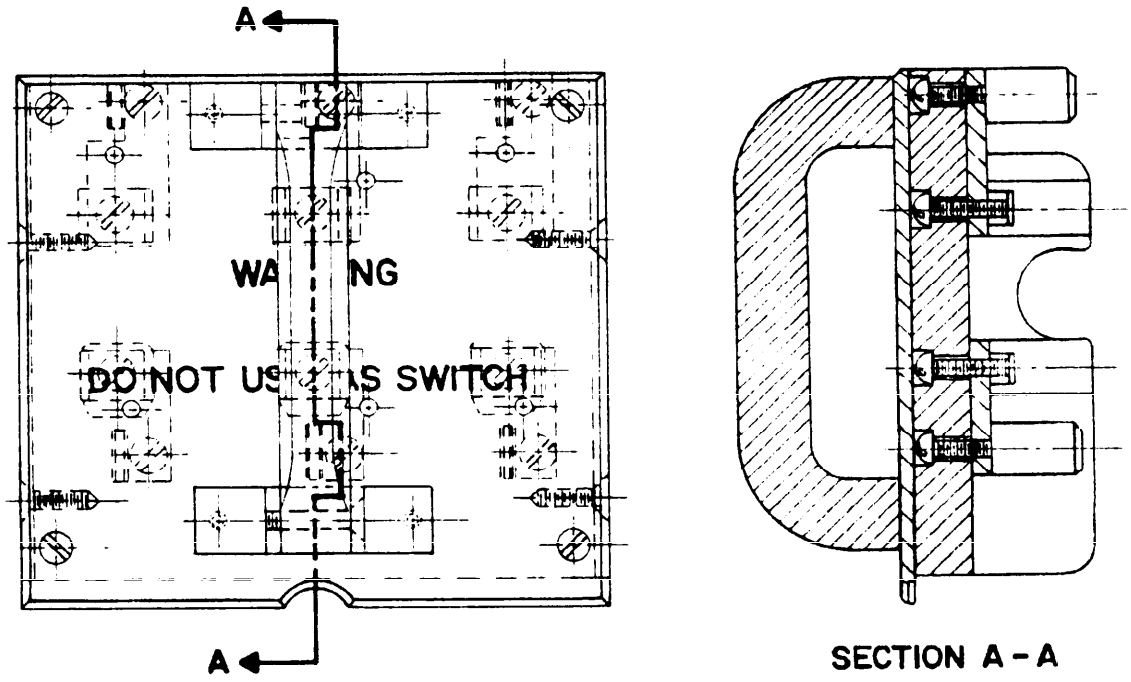

SH 131543

FIGURE 6. Fuse puller assembly, typical. (18) (19) (20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Symbol numbers: See table I.

Design:

Electrical rating: 500 volts alternating current, 0-30 ampere, 60 hertz.
Dimensions and configuration: See figures 1, 2, 3 and 4.
Wiring diagrams: See figure 5.
Mounting dimensions: See figure 3.
Degree of enclosure: Submersible (15 feet).
Designation and marking: See MIL-F-24646(SH).
Fuse puller assembly: The fuse puller assembly shall have blades that engage the jaws fastened to the base. The blades shall spread the jaws. The jaws shall grip the blade with enough force to prevent heating when under full load.
Parts: The parts listed in table II and specified in MIL-F-24646(SH) shall be used in the construction of the fuse boxes specified herein.

General information:

Military part numbers and general information are as specified in table I.

TABLE I. Military part numbers and general information.

Military part no.	Symbol no.	Weight in pounds	No. of circuits	Feeder MCM	Branch MCM	Fuse size	Bus bar size	Supersedes	
								Drawing no.	Type
M24646/13-001	568.1	56.1	4	75	40	0-30A	0.75 x 0.19	9000-S-74174	F-21A
M24646/13-002	569.1	45.0	2	75	40	0-30A	.75 x .19	9000-S-74178	F-26A
M24646/13-003	570.1	60.7	4	75	23	0-30A	.75 x .19	9000-S-74179	E-28A
M24646/13-004	571.1	81.0	6	75	23	0-30A	.75 x .19	9000-S-74180	F-42A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:34Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no. 1/	Description	QTY M /-				Material/spec	Remarks
		001	002	003	004		
01	Fuse box assembly (sym 568.1)	-				MIL-F-24646/13	See figure 1
02	Fuse box assembly (sym 569.1)					MIL-F-24646/13	See figure 1
03	Fuse box assembly (sym 570.1)					MIL-F-24646/13	See figure 1
04	Fuse box assembly (sym 571.1)					MIL-F-24646/13	See figure 1
05	Enclosure (14 x 16 x 5)	1				M24142/6-012	See figure 2
3/06	Enclosure (14 x 14 x 5)		1			M24142/6-011	See figure 2
07	Enclosure (14 x 20 x 5)			1		M24142/6-013	See figure 2
08	Enclosure (14.5 x 26 x 5.5)				1	M24142/6-014	See figure 2
09	Fuse block assembly	1				MIL-F-24646/13	See figure 4
10	Fuse block assembly		1			MIL-F-24646/13	See figure 4
11	Fuse block assembly			1		MIL-F-24646/13	See figure 4
12	Fuse block assembly				1	MIL-F-24646/13	See figure 4
13	Wiring diagram	1			1	MIL-E-2036	See figure 5
14	Wiring diagram		1		1	MIL-E-2036	See figure 5
15	Wiring diagram			1		MIL-E-2036	See figure 5
16	Wiring diagram				1	MIL-E-2036	See figure 5
17	Fuse clip (0-30A)	4	2	4	6	M21346/1-06	----
2/18	Fuse puller assembly (40MCM 1Ø)	4	-	-	-	----	See figure 6
2/19	Fuse puller assembly (40MCM 3Ø)	-	2	-	-	----	See figure 6
2/20	Fuse puller assembly (23MCM 3Ø)	-	-	4	6	----	See figure 6
21	Identification plate	1	1	1	1	Brass, QQ-B-613	----
22	Information plate	4	2	4	6	Brass, QQ-B-613	----

1/ Numbers in circles shown on the figures are the same as the item numbers shown in this table.
2/ Warning shall be engraved on front of plate and filled with red enamel.
3/ Enclosure M24142/6-012 may be used as an alternate. Mounting channel spacing will be maintained same as enclosure M24142/6-011.

Preparing activity:
Navy - SH
(Project 5920-N163-13)

Source: https://assist.dla.mil -- Downloaded: 20261O-20T00:34Z
Check the source to verify that this is the current version before use.