METRIC

MIL-T-24649/1(SH)
10 June 1994

MILITARY SPECIFICATION SHEET

TELEPHONE, HARDWARE, SOUND POWERED
A-17A, SWITCHBOX

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation. MIL-T-24649

REQUIREMENTS:

Dripproof (see 3 3.6)	Not required
Watertight (see 3.3.8)	Not required

Construction.

1. All dimensions unless otherwise specified are in mm Tolerances, unless otherwise specified shall be plus or minus .127 mm.
2. All sharp edges or corners exposed to touch shall be slightly rounded
3. Enclosures with a wall thickness greater than or equal to 4.775 mm shall be provided with a cable entrance plate on the top and the bottom of the enclosure.
4 Cable entrance plates shall preserve the degree of enclosure specified.
5. Space shall be provided inside the enclosure so that ships wiring will not be crushed or distorted when the enclosure is mounted and assembled
6. Screw threads for all threaded securing devices shall conform to FED-STD-H28 The thread shall be right handed, of the course thread series
7. Threads in aluminum alloys shall not be used. Through bolts shall be used whenever practical. Inserts shall be provided where screws or bolts must be removed for maintenance.
8. Threads shall not be employed in plastic parts without the use of suitable threaded metallic inserts.
9. Castings, if applicable, shall be free of cold shots, blow holes, or any other imperfections that may effect strength in any way. All surfaces of castings shall have all fins and burrs removed. Sand surfaces shall be disturbed as little as possible
10 Flash shall be removed and the width of the flash edges made thereby shall be not greater than 787 mm Flash edges shall then be buffed smooth
11 No deviation in details, dimensions, size and type as shown on the applicable standard will be permitted, unless approved by the Naval Sea Systems Command (NAVSEA).

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.

12. All loose parts required for installation or operation shall be provided in a suitable cloth or plastic bag and packaged with the assembly.
13. The area marked in parenthesis on the identification plate is to be left blank, installing activity will etch, stamp or engrave to suit.

Preparing activity:
Navy - SH
(Project 5935-N457-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.

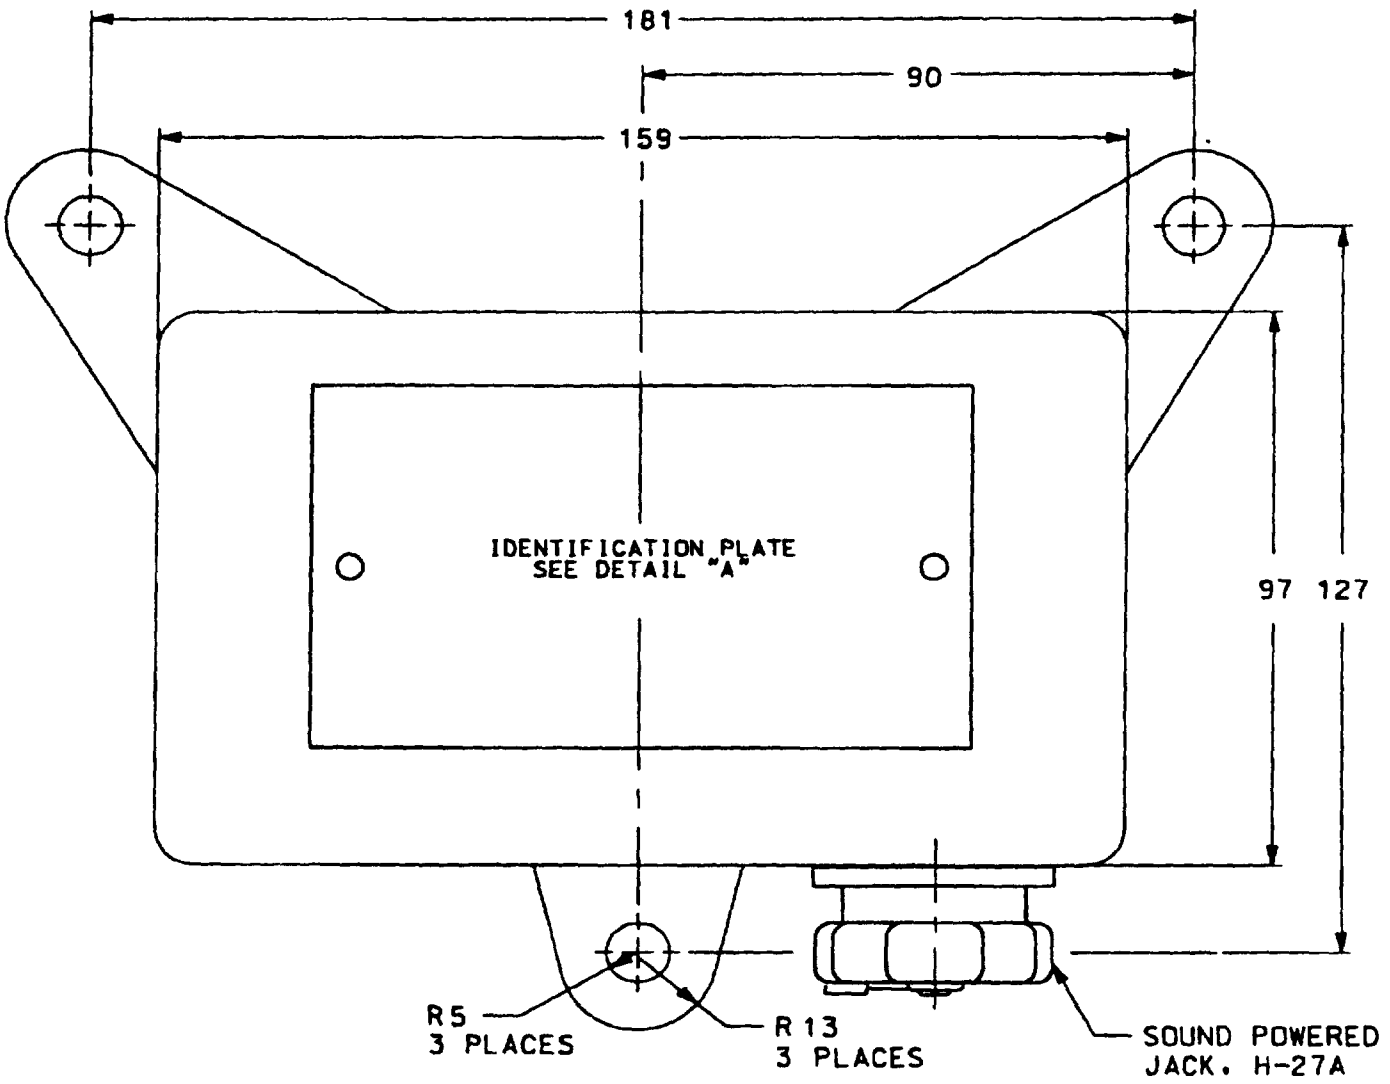


FIGURE 1 A-17A Switchbox, front with cover.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.

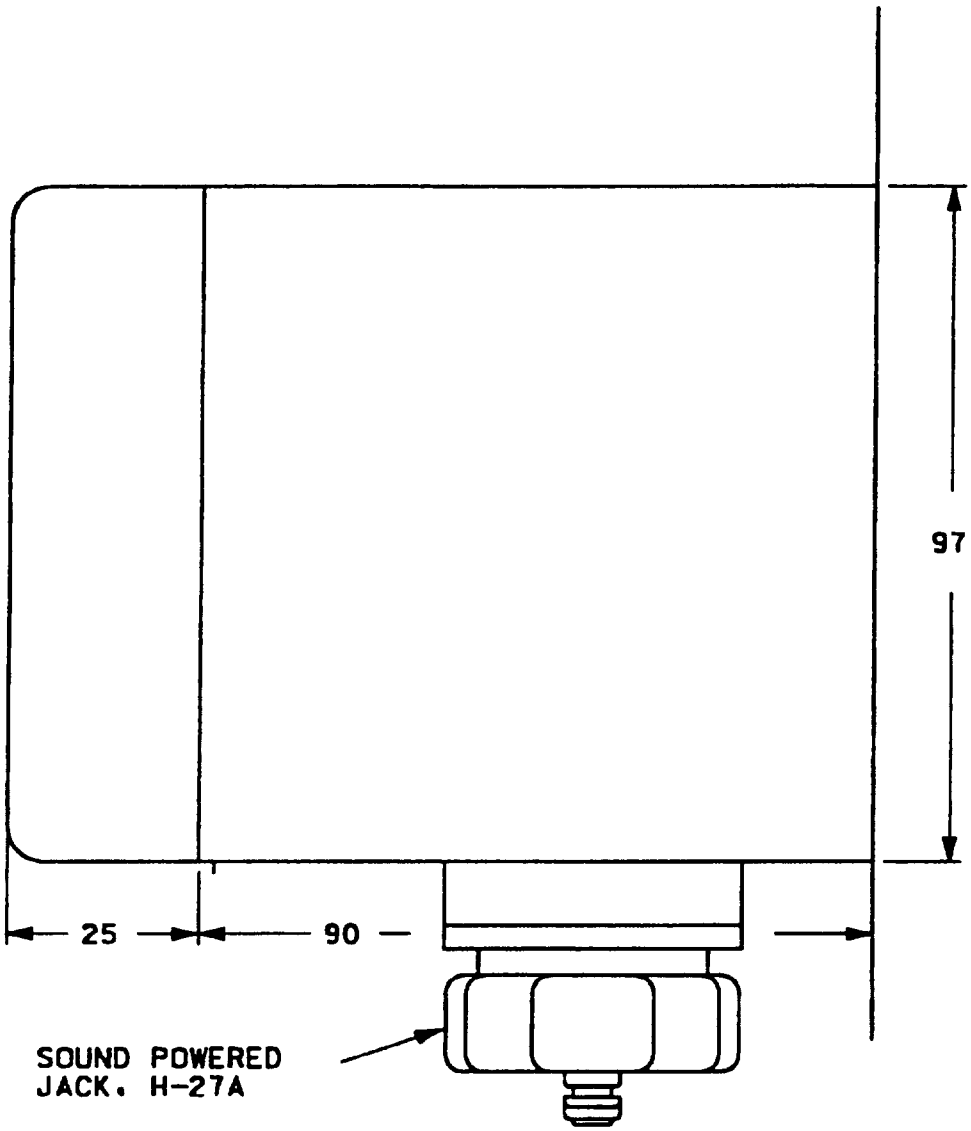


FIGURE 2 A-17 Side view

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.

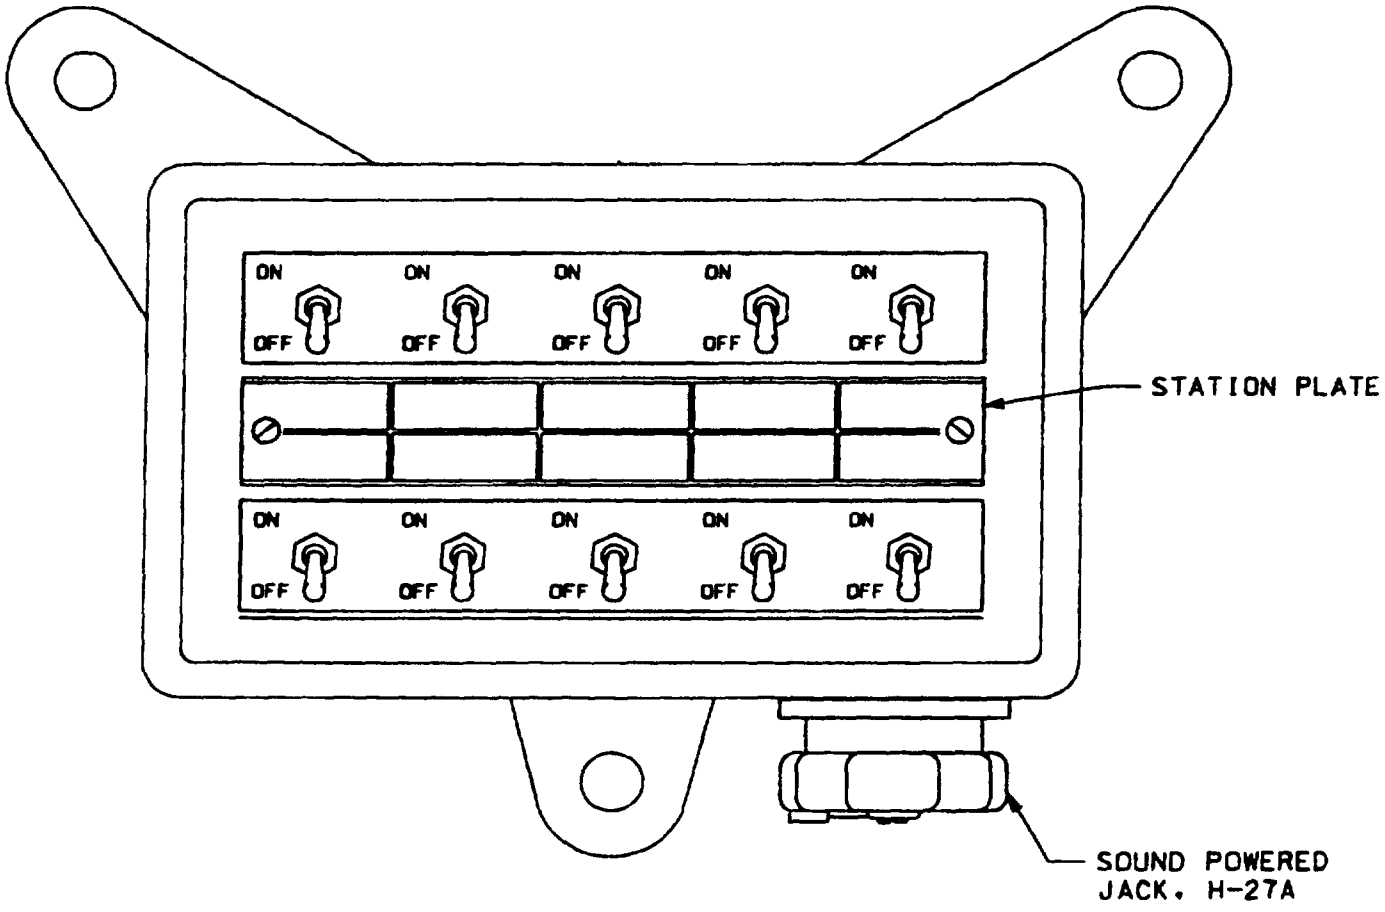


FIGURE 3 Front with cover removed

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.

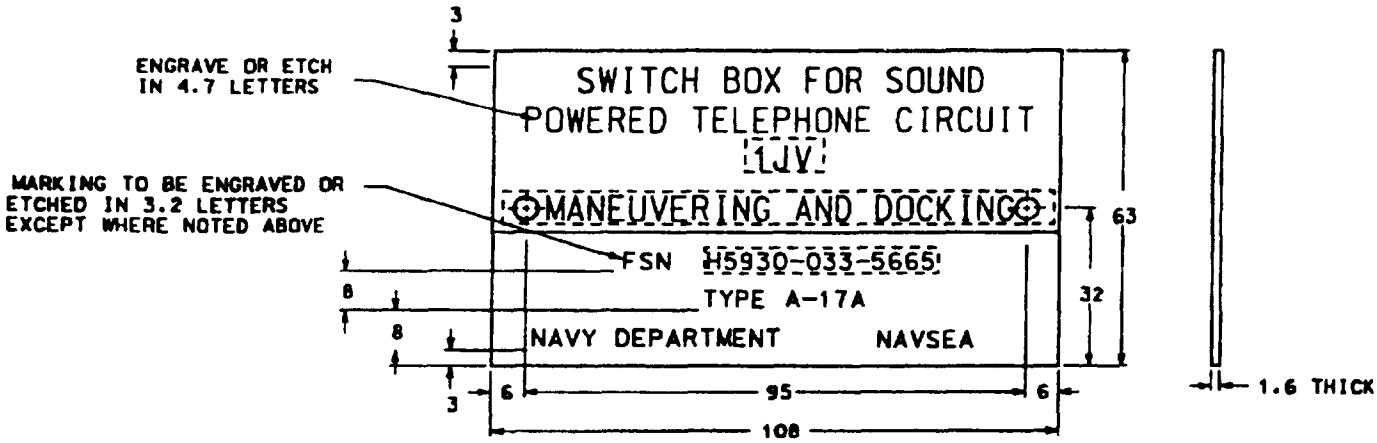


FIGURE 4. Detail "A", identification plate.

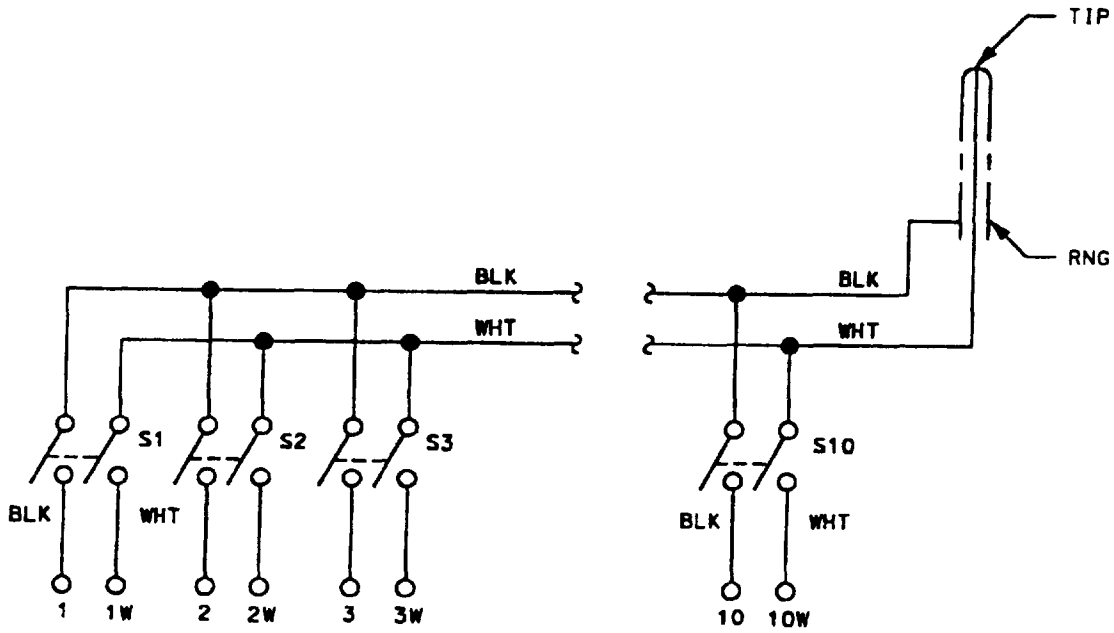


FIGURE 5 A-17 wiring diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.