METRIC

MIL-T-24649/9(SH)
10 June 1994

MILITARY SPECIFICATION SHEET

TELEPHONE, HARDWARE, SOUND POWERED
H-39A, SOUND POWERED PLUG

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-24649

REQUIREMENTS:

Dripproof (see 3.3.6)	not required
Splashproof (see 3.3.7)	not required
Insulation resistance (see 3.3.9)	not required
Talk demonstration (see 3.3.10)	not required
Identification plate (see 3.4 3)	not required
Information plate (see 3.4.4)	not required
Station plate (see 3.4.5)	not required
Switches (see 3.4.6)	not required
Terminal boards (see 3.4.7)	not required
Wiring (see 3 4.8)	not required
Wire terminals (see 3 4 9)	not required

Construction.

1. All dimensions unless otherwise specified are in mm. Tolerances, unless otherwise specified shall be as follows·

   (a) 3 place decimal plus or minus .127 mm
   (b) 2 place decimal plus or minus 051 mm

   All diameters on pieces shall be concentric to -A- within .25@.

2 Castings, if applicable, shall be free of cold shots, blow holes, or any other imperfections that may affect strength in any way. All surfaces of castings shall have all fins and burrs removed Sand surfaces shall be disturbed as little as possible.

3. No deviation in details, dimensions, size and type as shown on the applicable standard will be permitted, unless approved by the Naval Sea Systems Command (NAVSEA).

4 All loose parts required for installation or operation shall be provided in a suitable cloth or plastic bag and packaged with the assembly.

5 Two each of the stuffing nut, washer, and grommet shall be furnished with each sound powered plug. The hole diameter shall be as follows

   (a) Stuffing nut
   1 7 976@ ± .076
   2 5 182@ ± 076

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.

(b) Washer
1. 8.331@ ± 076
2. 5.182@ ± .076

(c) Grommet
1 7.976@ ± .076
2. 4.826@ ± .076

Preparing activity:
Navy - SH
(Project 5935-N457-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.

List of bubble numbers for drawings

2	Contact assembly	10	Gasket
3	Lower contact assembly	11	Contact holder
4	Upper contact assembly	12	Sleeve
5	Plug body	13	Contact spring
6	Grommet	14	Spacer
8	Stuffing nut	15	Spacer tube
9	Washer	16	Terminal

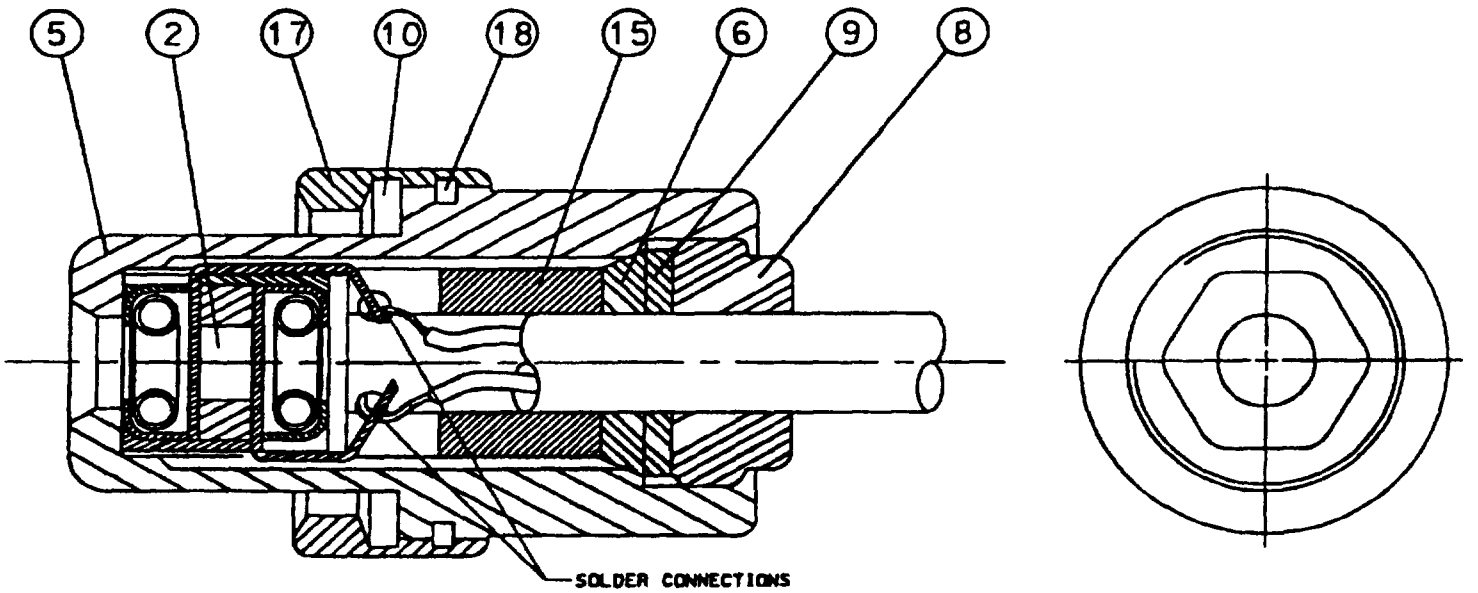


FIGURE 1 Plug assembly cut-away view

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.

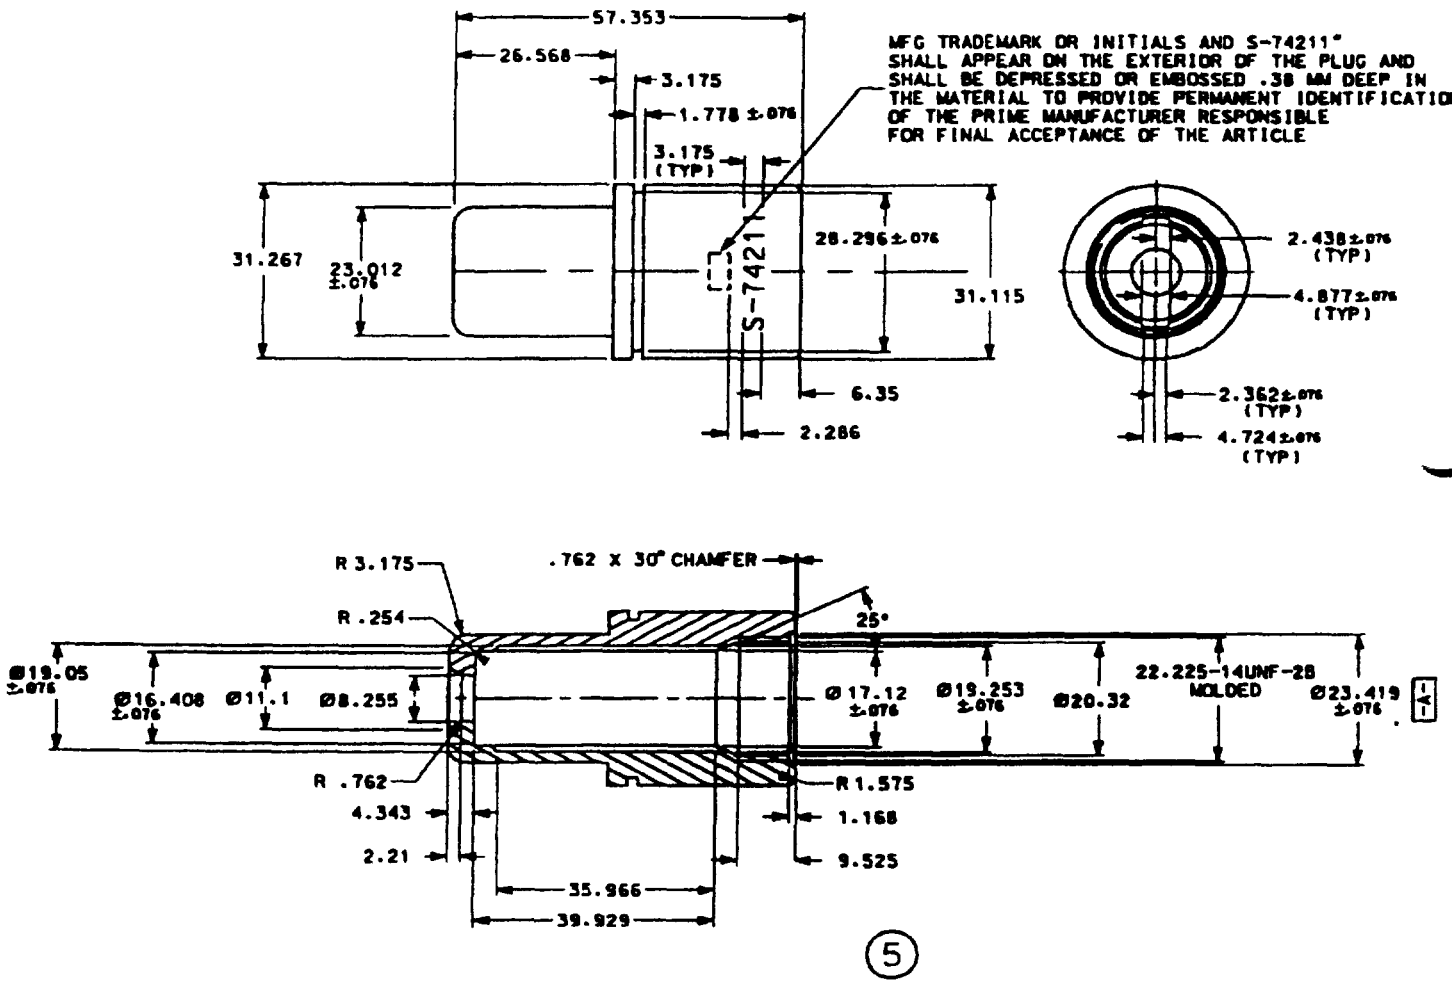


FIGURE 2 H-39A Sound powered plug, body

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.

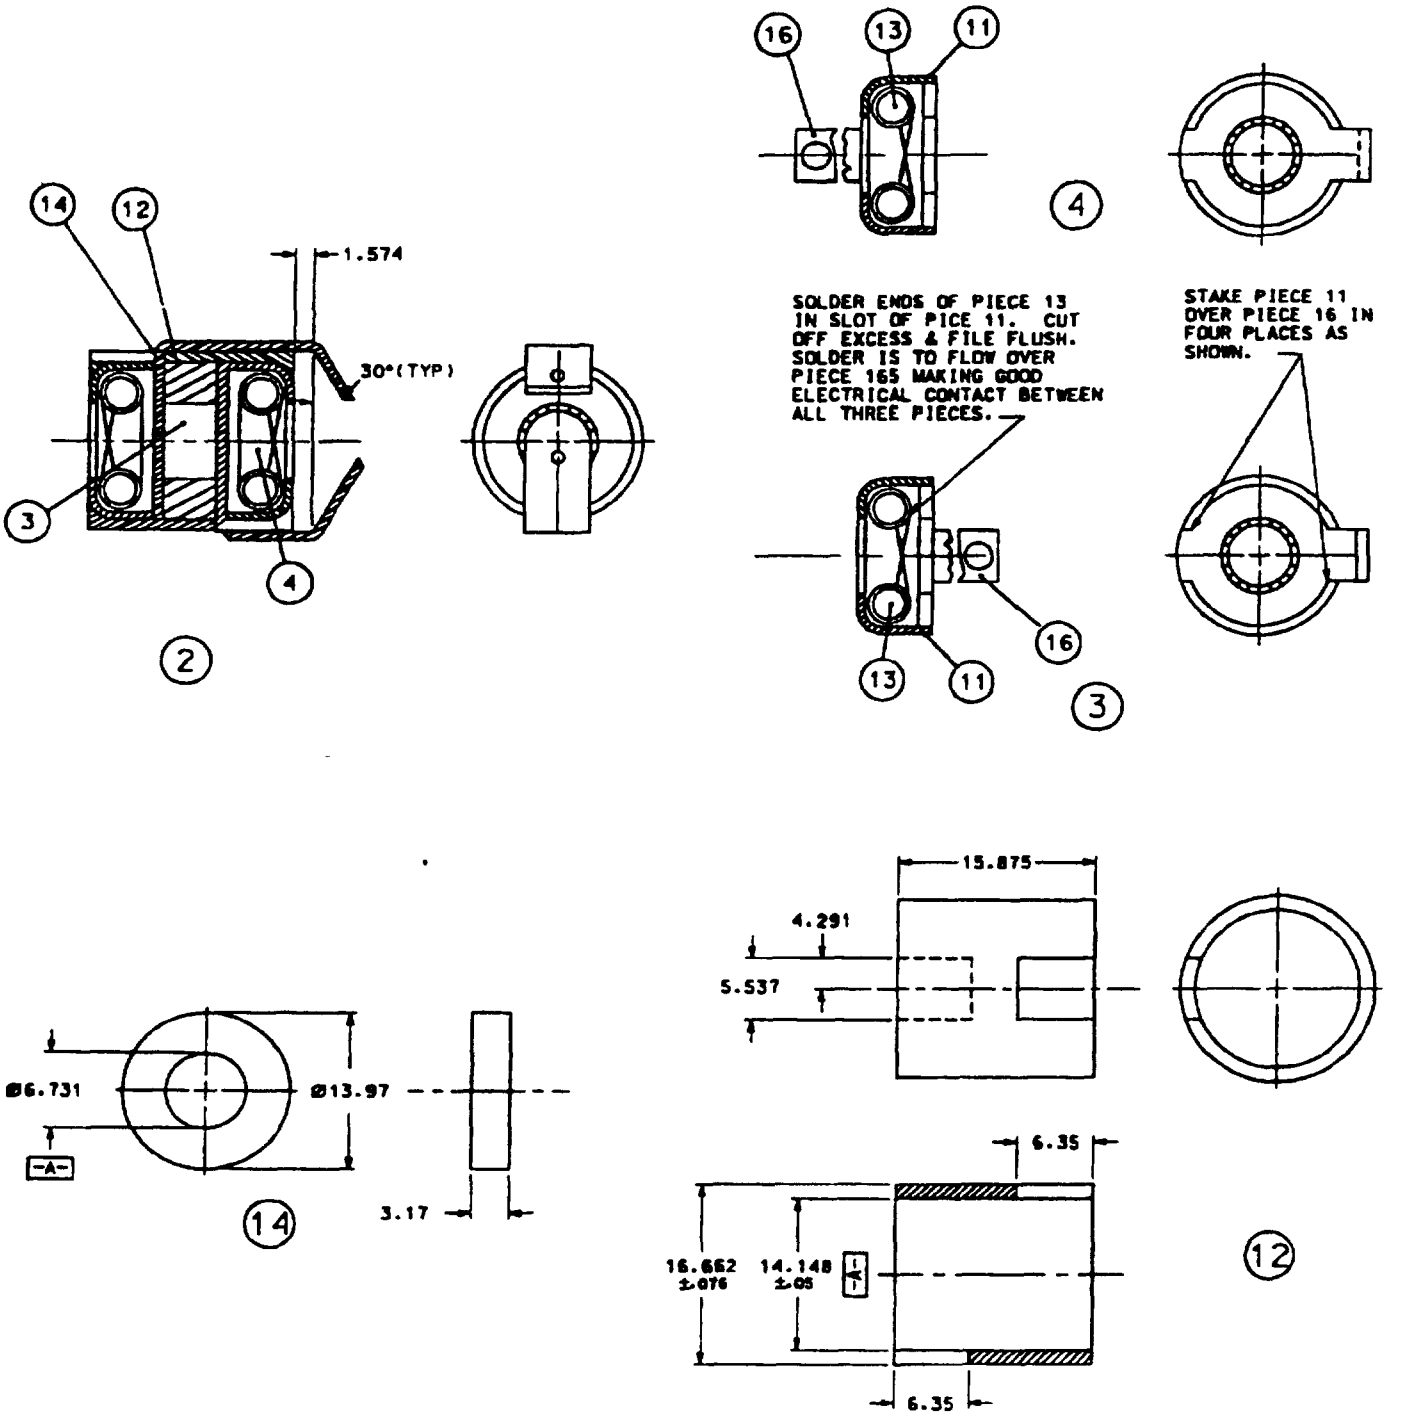


FIGURE 3 Contact assembly

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.



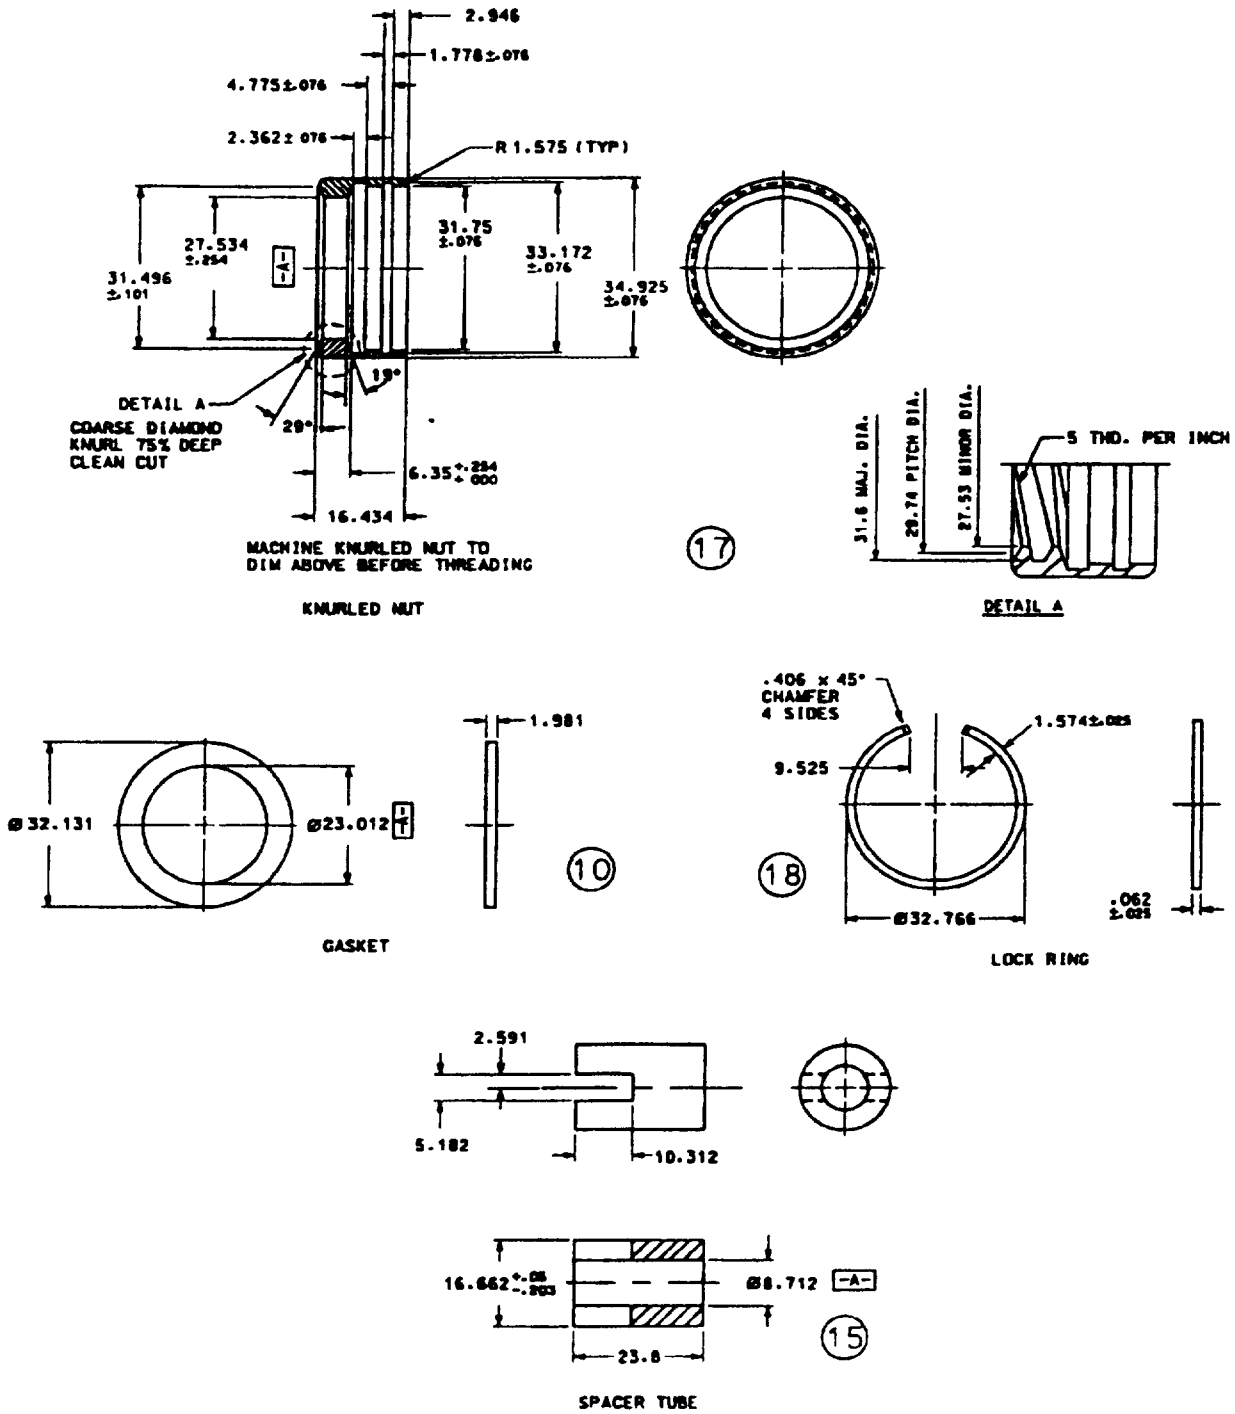


FIGURE 4 Details


Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.

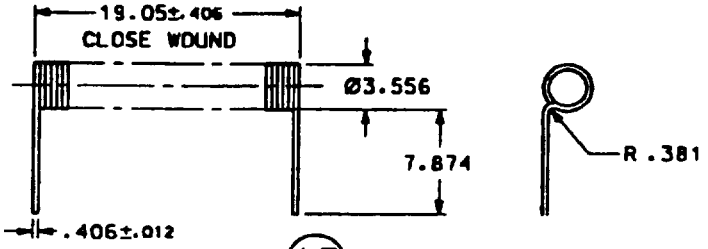

13 CONTACT SPRING

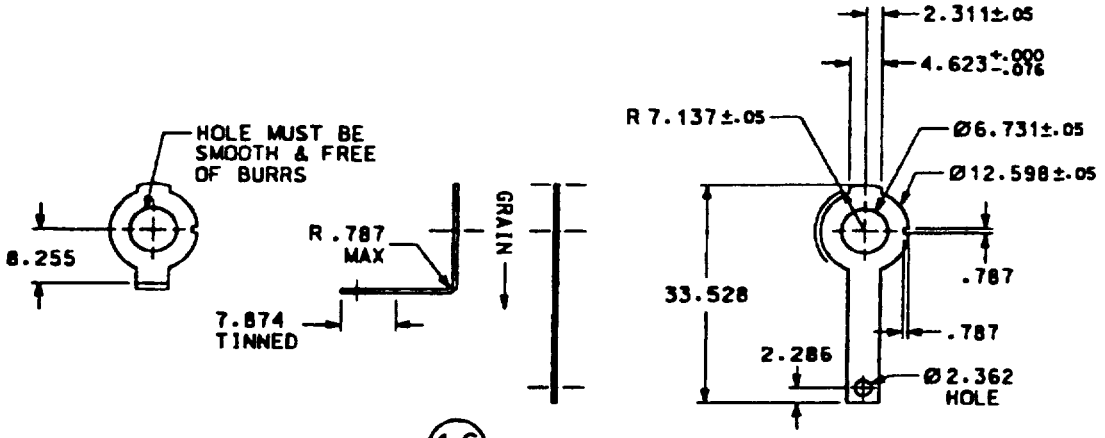


16 TERMINAL

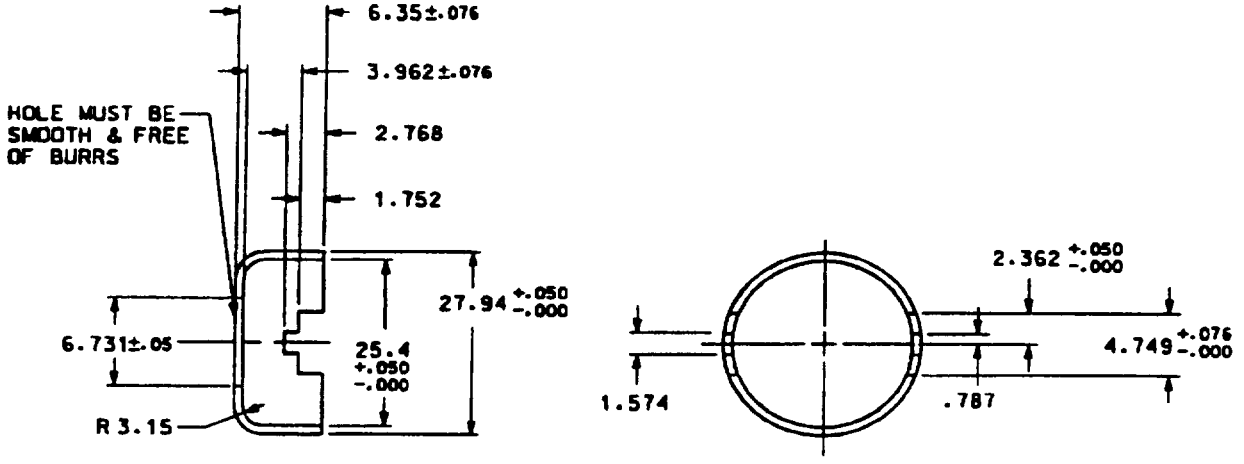


11 CONTACT HOLDER

FIGURE 5 Details.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.

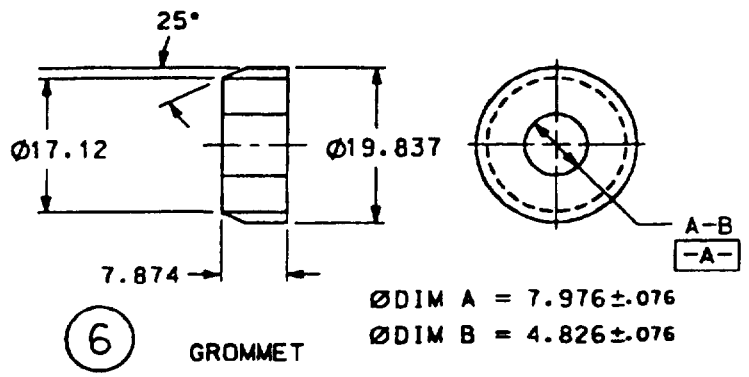

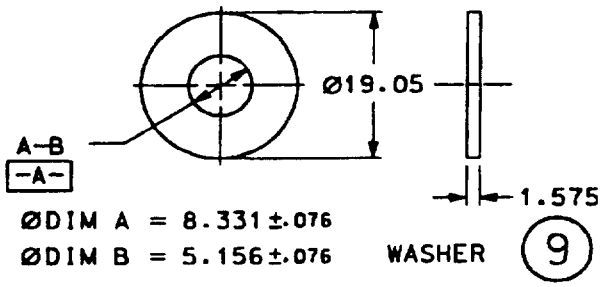

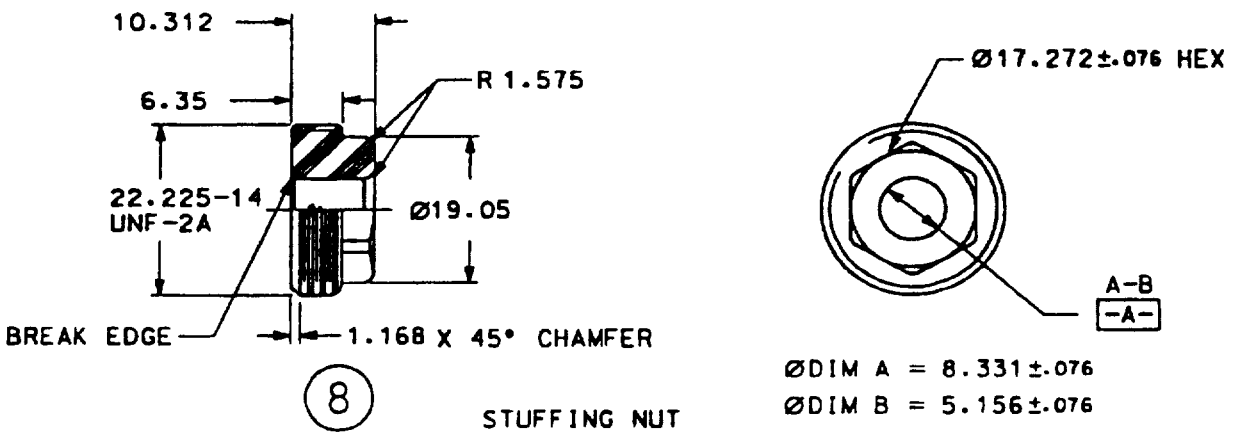


FIGURE 6 Details

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T00:39Z
Check the source to verify that this is the current version before use.