MILITARY SPECIFICATION

ADAPTERS, AIR LOCK, MUST

This specification is approved for use by Natick Research and Development Laboratories, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers air lock adapters for the MUST complex, fabricated of coated cloth.

1.2 Classification. The adapters shall be of the following types as specified (see 6.2):

Type I - Adapter, air lock, multi-purpose shelter
Type II - Adapter, air lock, 450 cubic foot refrigerator
Type III - Adapter, air lock, expandable shelter

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

TT-E-527 - Enamel, Alkyd, Lustreless
TT-E-529 - Enamel, Alkyd, Semi-Gloss
TT-P-636 - Primer Coating, Alkyd, Wood and Ferrous Metal
TT-P-1757 - Primer Coating, Zinc Chromate, Low-Moisture-Sensitivity

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/3359

FSC 5410

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:14Z
Check the source to verify that this is the current version before use.

DDD-L-20 - Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-C-843 - Cushioning Material, Cellulosic

MILITARY

MIL-C-5541 - Chemical Films and Chemical Film Materials for Aluminum and Aluminum Alloys

STANDARDS

FEDERAL

FED-STD-595 - Colors
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1188 - Commercial Packaging of Supplies and Equipment
MS 20470 - Rivet, Solid-Universal Head, Aluminum and Aluminum Alloy
MS 51937 - Bolt, Eye-Shoulder

DRAWINGS

US ARMY NATICK RESEARCH AND DEVELOPMENT LABORATORIES

ADAPTER, AIR LOCK, MULTI-PURPOSE (MUST)

5-4-1630 - Air Lock Adapter Assembly
5-4-1631 - Air Lock Adapter Frame and Support Bow Assemblies
5-4-1632 - Air Lock Adapter Cover Details

ADAPTER, AIR LOCK, 450 CUBIC FOOT REFRIGERATOR (MUST)

5-4-1634 - Assembly Complete
5-4-1635 - Cover Assembly
5-4-1636 - Cover Details
5-4-1637 - Subassemblies, Sections and Views
5-4-1638 - Frame Assembly
5-4-1639 - Roof Panel Assembly

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:14Z
Check the source to verify that this is the currentversion before use.

ADAPTER, AIR LOCK EXPANDABLE SHELTER (MUST)

5-4-1640 - Assembly Complete
5-4-1641 - Flap, Assembly, Stringer, Strap and Cable Assembly and Details

(Figures 1 through 3 are miniature reproductions of drawings 5-4-1630, 5-4-1634 and 5-4-1640 and are attached for information only.)

3. REQUIREMENTS

3.1 Alternate components. Components shall be as specified on the applicable drawings and as specified herein. For components for which it is stated "or equal", if the contractor proposes to use, an item considered to be equal to the component specified, prior to its use, the contractor shall furnish a sample of the component, with supporting data to the contracting officer for subsequent evaluation by the responsible military agency. The supporting data required shall prove the functional equivalence and design compatibility of the item proposed to be used. Prior to manufacture of the first article, the contractor shall submit for the contracting officer's approval a list identifying each proposed alternate component, together with proof that each listed component complies with requirements specified herein. The contracting officer, at his option, may require a physical sample of the proposed substitution. Approval of the submitted listing, together with necessary supporting data, authorizes the commencement of the first article manufacture and does not relieve the contractor of the responsibility that these components perform in accordance with specified requirements when incorporated into the end product.

3.2 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.3).

* 3.3 Initial production testing sample. When specified (see 6.2), the contractor shall furnish a sample for initial production inspection and approval (see 4.4 and 6.4).

* 3.4 Inspection comparison testing sample. When specified (see 6.2), the contractor shall furnish a sample for comparison inspection and approval (see 4.5 and 6.5).

3.5 Materials and components. Materials and components shall conform to the specifications, standards and drawings listed in section 2 and as specified herein (see 6.7).

3.6 Design and construction. Air lock adapters shall conform to the drawings listed in section 2 and as specified herein.

3.6.1 Stitching, machine. All stitching shall conform to type 301 of FED-STD-751, 5 to 7 stitches per inch (2 to 3 stitches/cm).

* 3.6.1.1 Thread breaks. Thread breaks shall be repaired by overstitching the existing stitching, starting from a distance of 1 inch (25 mm) before the break, across the defective area, to a distance of 1 inch (25 mm) beyond the break. The ends of repair stitching are not required to be backstitched.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:14Z
Check the source to verify that this is the currentversion before use.

3.6.1.2 Stitching ends. The ends of stitching shall be overstitched not less than 1 inch (25 mm) except where ends are turned under in a hem, held down by other stitching or where stitching is performed automatically. Where stitching is performed automatically, stitch patterns such as box and box with cross-stitch, 3 or more tying, overlapping or backstitches shall be used to secure the ends.

* 3.6.1.3 Repair of skipped stitches or run-offs. Two or more consecutively skipped stitches or run-off stitches shall be repaired by overstitching. Overstitching shall be accomplished for a distance of not less than 1 inch (25 mm) before, to a minimum of 1 inch (25 mm) beyond, the affected area of skipped stitches or run-offs.

* 3.6.1.4 Lubrication of thread. The addition of any lubricant to the polyester thread prior to or during the sewing operation is prohibited. Water or air spraying for needle cooling is permissible.

3.6.2 Setting of rivets. Rivets shall be securely set and neatly headed.

3.6.3 Setting of cinch fasteners. If a hole is punched prior to inserting the stud, it shall be smaller than the outside diameter of the stud tube so that the tube must be forced through the hole. The cinch fasteners shall be securely clinched.

3.6.4 Setting of grommets. Holes punched to receive grommets shall be smaller than the outside diameter of the grommet barrel so that the barrel must be forced through the hole. The grommets shall be securely clinched without cutting the materials.

* 3.6.5 Attachment of slide fastener stringers. Care shall be exercised to utilize proper tension during attachment of slide fastener stringers. Slide fastener scoops shall be evenly distributed throughout the entire length of component interface assemblies. The location of separating pins and separating pin retainers shall be maintained as specified on the drawing. Uneven scoop distribution and improper location of pins or retainers is detrimental to the joining capabilities and interchangeability characteristics required. Care shall also be exercised to maintain specified distances between the outer edge of the chain and the stitching, attaching the stringer tapes to the cloth so that there will be no interference with the operation of the slider when mating the stringer halves.

3.6.6 Fusing of webbing ends. Cut ends of nylon webbing shall be fused and, after fusing, shall be free from frayed edges and loose fibers.

3.6.7 Fusing of polyester cord ends. Cut ends of polyester cord shall be fused to prevent fraying.

3.6.8 Welding. All welding shall be as specified on the drawings. Materials to be welded shall be clean and free from scale, corrosion, oil, water and other foreign matter. Welds shall be sound, smooth, free from flash and show good fusion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:14Z
Check the source to verify that this is the current version before use.

3.6.9 Bolts, nuts, washers and rivets. Bolts, nuts, washers and rivets shall be of the materials, types and sizes specified on the drawings and of commercial quality. Where steel is specified the part shall be cadmium or zinc plated in accordance with the manufacturer's standard practice for commercial items. Heads of bolts attaching roof panel hinges to roof panel shall be pulled up tight to surfaces of plywood.

3.7 Finish of component assemblies.

* 3.7.1 Frames and bow assemblies. After fabrication and prior to assembly of sponge rubber seals, adapter frames, bow assemblies and aluminum retaining strips shall be cleaned and prepared in accordance with class 1A of MIL-C-5541. After treatment, all metal surfaces shall be coated with primer conforming to composition G or L of TT-P-1757, color Y or T. When primer is dry, all exterior surfaces shall be coated with enamel conforming to TT-E-527, Olive Drab 34087 of FED-STD-595. The finished coat shall level out to an adherent, continuous and uniform film without runs, wrinkles, streaks or areas of no film. Any coating damaged during assembly or examination shall shall be touched up.

3.7.2 Roof panel assemblies.

3.7.2.1 Aluminum brackets and braces. Roof panel brackets and braces, prior to assembly to the plywood panel, shall be cleaned, prepared and primed as specified for frame and bow assemblies in 3.7.1 above. When primer is dry all surfaces shall be coated with enamel conforming to TT-E-529, color no. 24554 of FED-STD-595. The finished coat shall level out to an adherent, continuous and uniform film without runs, wrinkles, streaks or areas of no film. Any coating damaged during assembly to the roof panel or during examination shall be touched up.

3.7.2.2 Plywood. Prior to assembly of hardware, the plywood roof panels shall be cleaned of dust and other foreign matter and all visible voids in the core of the plywood shall be filled with commercial cellulose fiber paste wood filler and sanded smooth. The prepared surfaces shall then be given a coat of primer conforming to TT-P-636. When primer is dry, all surfaces shall be given two coats of enamel conforming to TT-E-529, color no. 24554 of FED-STD-595.

3.8 Marking.

3.8.1 Nomenclature. The application of the letters "US" and the nomenclature on the adapters shall conform to type IV, class 9 of DDD-L-20 in the size characters and in the locations shown on the drawings. Class 9 markings shall be clearly legible after subjection to accelerated weathering.

3.8.2 Identification labels. Identification labels shall conform to type VI, class 6 of DDD-L-20 and shall be 3-1/2 inches by 5-1/2 inches (89 mm by 140 mm) minimum with a blank space of at least 1-1/4 inches (32 mm) provided on the bottom of the label for the Department of Defense Inspector's stamp. Identification labels shall be stitched to the adpaters in the location shown on the drawing.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:14Z
Check the source to verify that this is the currentversion before use.

3.9 Workmanship. Cloth components shall be free from holes, cuts, or tears, thin or weak places caused by abrasion, exposed fabric, blisters, tunnels, unadhered pockets, loose edges, or delamination of coating, creases, wrinkles or coating missing. Webbing shall contain no frayed or scalloped edges. Cord and rope components shall be free of cuts, abrasions or breaks. Thread tension shall be maintained so that there will be no loose stitching and seam allowances shall be maintained with seams properly sewed so that no run-offs, pleats or open seams shall result. Care shall be taken in sewing so that there shall be no needle chews. All thread ends shall be trimmed to 1/2 inch (13 mm) or less. Metal components shall be free of burrs, sharp edges, corroded areas and shall not be broken or malformed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Initial production inspection (see 4.4).
c. Inspection comparison (see 4.5).
d. Quality conformance inspection (see 4.6).

* 4.3 First article inspection. When a first article is required, the complete air lock adapter shall be examined for defects listed in tables I and II. The presence of any defect shall be cause for rejection of the first article.

* 4.4 Initial production sample inspection. When an initial sample is required, the complete air lock adapter shall be examined for defects as specified in tables I and II. The presence of any defect shall be cause for rejection of the initial production sample.

* 4.5 Comparison sample inspection. When a comparison sample is required, the complete air lock adapter shall be examined as specified in tables I and II. The presence of any defect shall be cause for rejection of the comparison sample.

4.6 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

* 4.6.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:14Z
Check the source to verify that this is the current version before use.

* 4.6.2 In-process inspection. Examination shall be made to determine that the following are as specified. Whenever nonconformance is noted, correction shall be made to the process and all items processed.

a. That no lubrication is applied to the polyester thread prior to or during sewing operations for compliance with 3.6.1.4.

b. That holes punched to receive cinch fasteners are in compliance with 3.6.3.

c. That holes punched to receive grommets are in compliance with 3.6.4.

d. That welds and welding are in compliance with 3.6.8 and applicable drawings.

e. That chemical treatment of frame and bow assemblies, and drying of primer coats prior to application of enamel is in compliance with 3.7.1.

f. That chemical treatment of roof panel brackets and braces, and drying of primer coats prior to application of enamel is in compliance with 3.7.2.1.

g. That cleaning and filling of core voids in plywood roof panel, and drying of primer coat prior to application of enamel is in compliance with 3.7.2.2.

h. That length of slide fastener stringers, locations of separating pins and box retainers and the number of scoops per stringers and the distribution of scoops are as specified herein and on the applicable drawings.

* 4.6.3 End item inspection. The end item shall be examined in accordance with 4.6.3.1 and 4.6.3.2. The lot shall consist of all air lock adapters of one type offered for inspection at one time. The sample unit shall be one air lock adapter.

4.6.3.1 Visual examination. The end item shall be examined for the defects listed in table I. The inspection level shall be II. For type I and II adapters, the acceptable quality level (AQL) shall be 25.0 major, 65.0 major and minor A combined, and 100.0 total defects per hundred units. For type III adapters, the AQL shall be 15.0 major, 65.0 major and minor A combined, and 100.0 total defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:14Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects for visual characteristics

Examine	Defect	Classification Major	Minor A	Minor B
Cloth, coated	Hole, cut or tear	X		
	Exposed fabric; delamination of coating	X		
	Crease or wrinkle; blister; tunnel; scratch or abrasion		X	
	Lump or heavy coated area			X
Webbing	Frayed or scalloped edge; cut end not fused			X
Cord	Cut or abrasion		X	
	End not fused			X
Rope	Cut or break	X		
Hardware	Broken	X		
	Malformed:			
	- fails to perform intended function	X		
	- but will perform intended function		X	
	Corroded area			X
	Burr or sharp edge which may cause injury in handling or damage to fabric	X		
Grommets (type III adapter)	Improperly set, two or more teeth exposed			X
	Clinched loosely, allowing grommet to rotate around hole		X	
	Clinched excessively tight; i.e., cutting fabric	X		
	Insecurely clinched, i.e., grommets or washers become disengaged	X		
Rivets	Missing	X		
	Not headed; i.e., can be removed by hand		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:14Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching	Open seams:			
	- 1/2 inch or less			X
	- more thann 1/2 inch but not more than 1 inch		X	
	- more than 1 inch	X		
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken, or when two or more skipped or runoff stitches occur. On double-stitched seams, a seam shall be classified as open when one or both sides of a seam are open.			
	Thread breaks overstitched less than 1 inch			X
	Needle chew resulting in cut, tear or hole	X		
	Skipped stitches overstitched less than 1 inch (where two or more consecutively skipped stitches occur)			X
	NOTE: Skipped stitches not overstitched shall be classified as open seams.			
Seam type	Wrong seam type	X		
Stitch type	Wrong stitch type	X		
Stitch tension	Loose, resulting in an exposed bobbin or top thread for more than 6 inches in length			X
	Tight, as evidenced by puckering on seams for more than 6 inches in length			X
Stitches per inch	Less than minimum specified:			
	- one stitch			X
	- two or more stitches		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:14Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)				
Stitches per inches (cont'd)	More than maximum specified:			
	- one stitch			X
	- two or more stitches		X	
	NOTE: Variation in the number of stitches per inch, caused by the operator speeding up the machine and pulling the fabric in order to sew over heavy places or heavy seams or in turning corners, shall be classified as follows:			
	a. Within the minor "B" defect classification - no defect			
	b. Within the minor "A" defect classification - minor "B" defect			
Stitching margin	Larger than specified by more than 1/16 inch:			
	- for more than 1 inch, but not more than 4 inches in length			X
	- for more than 4 inches in length		X	
Stitching gage	Not as specified		X	
Stitching ends	Overstitched less than 1 inch (except where ends are held down by other stitching, turned under in a hem or where stitching is performed automatically)			X
	Secured with less than three tying, overlapping or backstitches when automatic stitching is performed			X

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:14Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor A	Minor B
Finish of metal	Not finished	X		
	Not adherent; e.g.,blistered, peeled or flaky		X	
	Coating not continuous or uniform, i.e., not coated or area of no film		X	
	Scratch, dig or abrasion exposing bare metal			X
Finish of plywood roof panel (type II adapter)	Not finished	X		
	Finish not smooth or uniform; e.g., contains brush marks, runs, wrinkles, drops		X	
	Area of no film		X	
	Area of thin film; i.e., primer shows through			X
	Peeling, flaking, or blistering		X	
	Edge of plywood not rounded		X	
	Corner not rounded		X	
Components and assembly	Any component part not fabricated of applicable referenced material	X		
Marking	Omitted, incorrect, illegible, misplaced, or size of characters not as specified			X
Cleanness	Grease or oil stains; thread ends not trimmd to 1/2 inch or less throughout			X

* 4.6.3.2 Dimensional examination. The end item shall be examined for the defects listed in table II. The inspection level shall be S-3. For type I and II adapters, the AQL shall be 2.5 major and 15.0 total defects per hundred units. For type III adapters, the AQL shall be 2.5 major and 25.0 total defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:14Z
Check the source to verify that this is the currentversion before use.

TABLE II. Classification of defects for dimensional characteristics

Examine	Defect	Classification Major	Classification Minor
Overall dimensions, frame assembly and bow support assembly	Smaller than specified dimensions less applicable minus tolerance indicated on drawings	X	
	Larger than specified dimensions and applicable plus tolerance indicated on drawings		X
Flap assembly, stringer	Not within the specified tolerance	X	
	Location of stringer pin or box retainer not within the specified tolerance	X	
Frame flap section assembly (type III adapter)	Less than 262 inches or more than 266 inches in length	X	
Component and location dimensions (unless otherwise specified)	Not within specified tolerance		X

4.6.4 Packaging inspection. An examination shall be made to determine that preservation, packing and marking comply with section 5 requirements. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully packaged, except that it need not be closed. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

TABLE III. Packaging inspection defects

Examine	Defect
Marking (exterior and unit packs)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing or damaged
Workmanship	Bulged or distorted container
Content	Number per container more or less than required

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:14Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial (see 6.2).

5.1.1 Level A.

5.1.1.1 Adapter, multi-purpose shelter (type I). The four eye bolts on each multi-purpose shelter adapter shall be covered with cushioning material conforming to type II, class B of PPP-C-843 and cushioning secured with tape, cord or twine. The guy lines shall be individually coiled and secured from unwinding.

5.1.1.2 Adapter, 450 cubic foot refrigerator (type II). Each adapter shall be knocked down with the plywood panel and braces flat against the sides of the frame. The covering shall be neatly and compactly folded to assume the dimensions of the frame. Each folded adapter shall be secured with cotton tape or twine approximately 12 inches in from each end.

5.1.1.3 Adapter, expandable shelter (type III). Each expandable shelter adapter shall be compactly folded and unit packed in a snug-fitting fiberboard box conforming to type CF (variety SW) or SF, class domestic, grade 200, style RSC of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

* 5.1.2 Commercial. Complete adapters shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

5.2.1 Level A packing.

5.2.1.1 Adapter, multi-purpose shelter. Four multi-purpose shelter adapters, preserved as specified in 5.1, shall be packed in a snug-fitting cleated, plywood shipping container conforming to overseas type, type 3 load, of PPP-B-601. The adapters shall be staggered within the shipping container so as to minimize contact of the projecting eye bolts with fabric of the adjacent adapter. Lumber blocking and bracing shall be used to immobilize the adapters within the shipping container. The blocking and bracing shall not depend on end-grain nailing alone, but supplemental supporting cleats shall be provided to reinforce and prevent splitting of the blocking and bracing. Closure and strapping shall be in accordance with the appendix of PPP-B-601.

5.2.1.2 Adapter, 450 cubic foot refrigerator. One adapter, preserved as specified in 5.1, shall be packed in a snug-fitting plywood box conforming to overseas type of PPP-B-601. Closure and strapping shall be in accordance with the appendix of PPP-B-601.

* 5.2.1.3 Adapter, expandable shelter. The expandable shelter adapters, preserved as specified in 5.1, shall be packed in a snug-fitting cleated plywood shipping container conforming to overseas type, type, grade, and style optional of PPP-B-601. Closure and strapping shall be in accordance with the box specification.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:14Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing.

5.2.2.1 Adapter, multi-purpose shelter. Four multi-purpose shelter adapters, preserved as specified in 5.1, shall be packed in a snug-fitting, cleated, plywood shipping container conforming to domestic type, style A or B of PPP-B-601. The adapters shall be positioned and immobilized as specified in 5.2.1.1. Each shipping container shall be closed and strapped in accordance with the appendix of PPP-B-601.

5.2.2.2 Adapter, 450 cubic foot refrigerator. One adapter, preserved as specified in 5.1, shall be packed in a snug-fitting plywood box conforming to domestic type, style A or B of PPP-B-601. Closure and strapping shall be in accordance with the appendix of PPP-B-601.

5.2.2.3 Adapter, expandable shelter. Six expandable shelter adapters, preserved as specified in 5.1, shall be packed in a snug-fitting, fiberboard shipping container conforming to type CF (variety SW) or SF, class domestic, grade 275, style RSC of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

* 5.2.2.3.1 Weather-resistant containers. When specified (see 6.2), the shipping container for expandable shelter adapters shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix thereto.

* 5.2.3 Commercial packing. Adapters, preserved as specified in 5.1 shall be packed in accordance with MIL-STD-1188.

* Marking. In addition to any special marking required by the contract, unit packs and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

6. NOTES

6.1 Intended use. Air lock adapters are intended for use in connecting a multi-purpose shelter, 450 cubic foot refrigerator or an expandable shelter, as applicable, to other components of the MUST complex such as: an air lock, a passageway, an end panel of the inflatable ward shelter or an entryway of the inflatable corridor connector shelter section.

6.2 Ordering data. Procurement documents should specify the following;

(a) Title, number and date of this specification.
(b) Type required (see 1.2).
(c) Stock number.
(d) When a first article is required (see 3.2, 4.2 and 6.3).
(e) When an initial production testing sample is required (see 3.3, 4.4 and 6.4).
(f) When an inspection comparison testing sample is required (see 3.4, 4.5 and 6.5).
(g) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
h) When fiberboard shipping containers for level B packing shall be weather-resistant grade (see 5.2.2.3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:14Z
Check the source to verify that this is the current version before use.

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of DAR 7-104.55. The first article should be a preproduction sample consisting of one adapter. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

* 6.4 Initial production test. When an initial production test sample is required, the contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the initial production test sample.

* 6.5 Inspection comparison test. When a comparison test sample is required, the contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the comparison test sample.

6.6 Anchoring components. The following anchoring components are required for the erection of the types I and II adapters:

(a) Type I - Adapter, Air Lock, Multi-Purpose Shelter:

2 each	-	Pin, tent, metal conforming to type II of MIL-P-501
4 each	-	Anchors, ground, arrowhead conforming to type II, grade B of MIL-A-3962
2 each	-	Spike, bow conforming to Army Natick Laboratories Drawing 5-4-1417

(b) Type II - Adapter, Air Lock 450 Cubic Foot Refrigerator:

4 each	-	Pin, Tent, metal conforming to type II of MIL-P-501.

* 6.7 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.5).

Custodian:

Army - GL

Review activity:


Army - MD
DCSC - CS

Preparing activity:


Army - GL

Project No. 5410-A303

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:14Z
Check the source to verify that this is the current version before use.

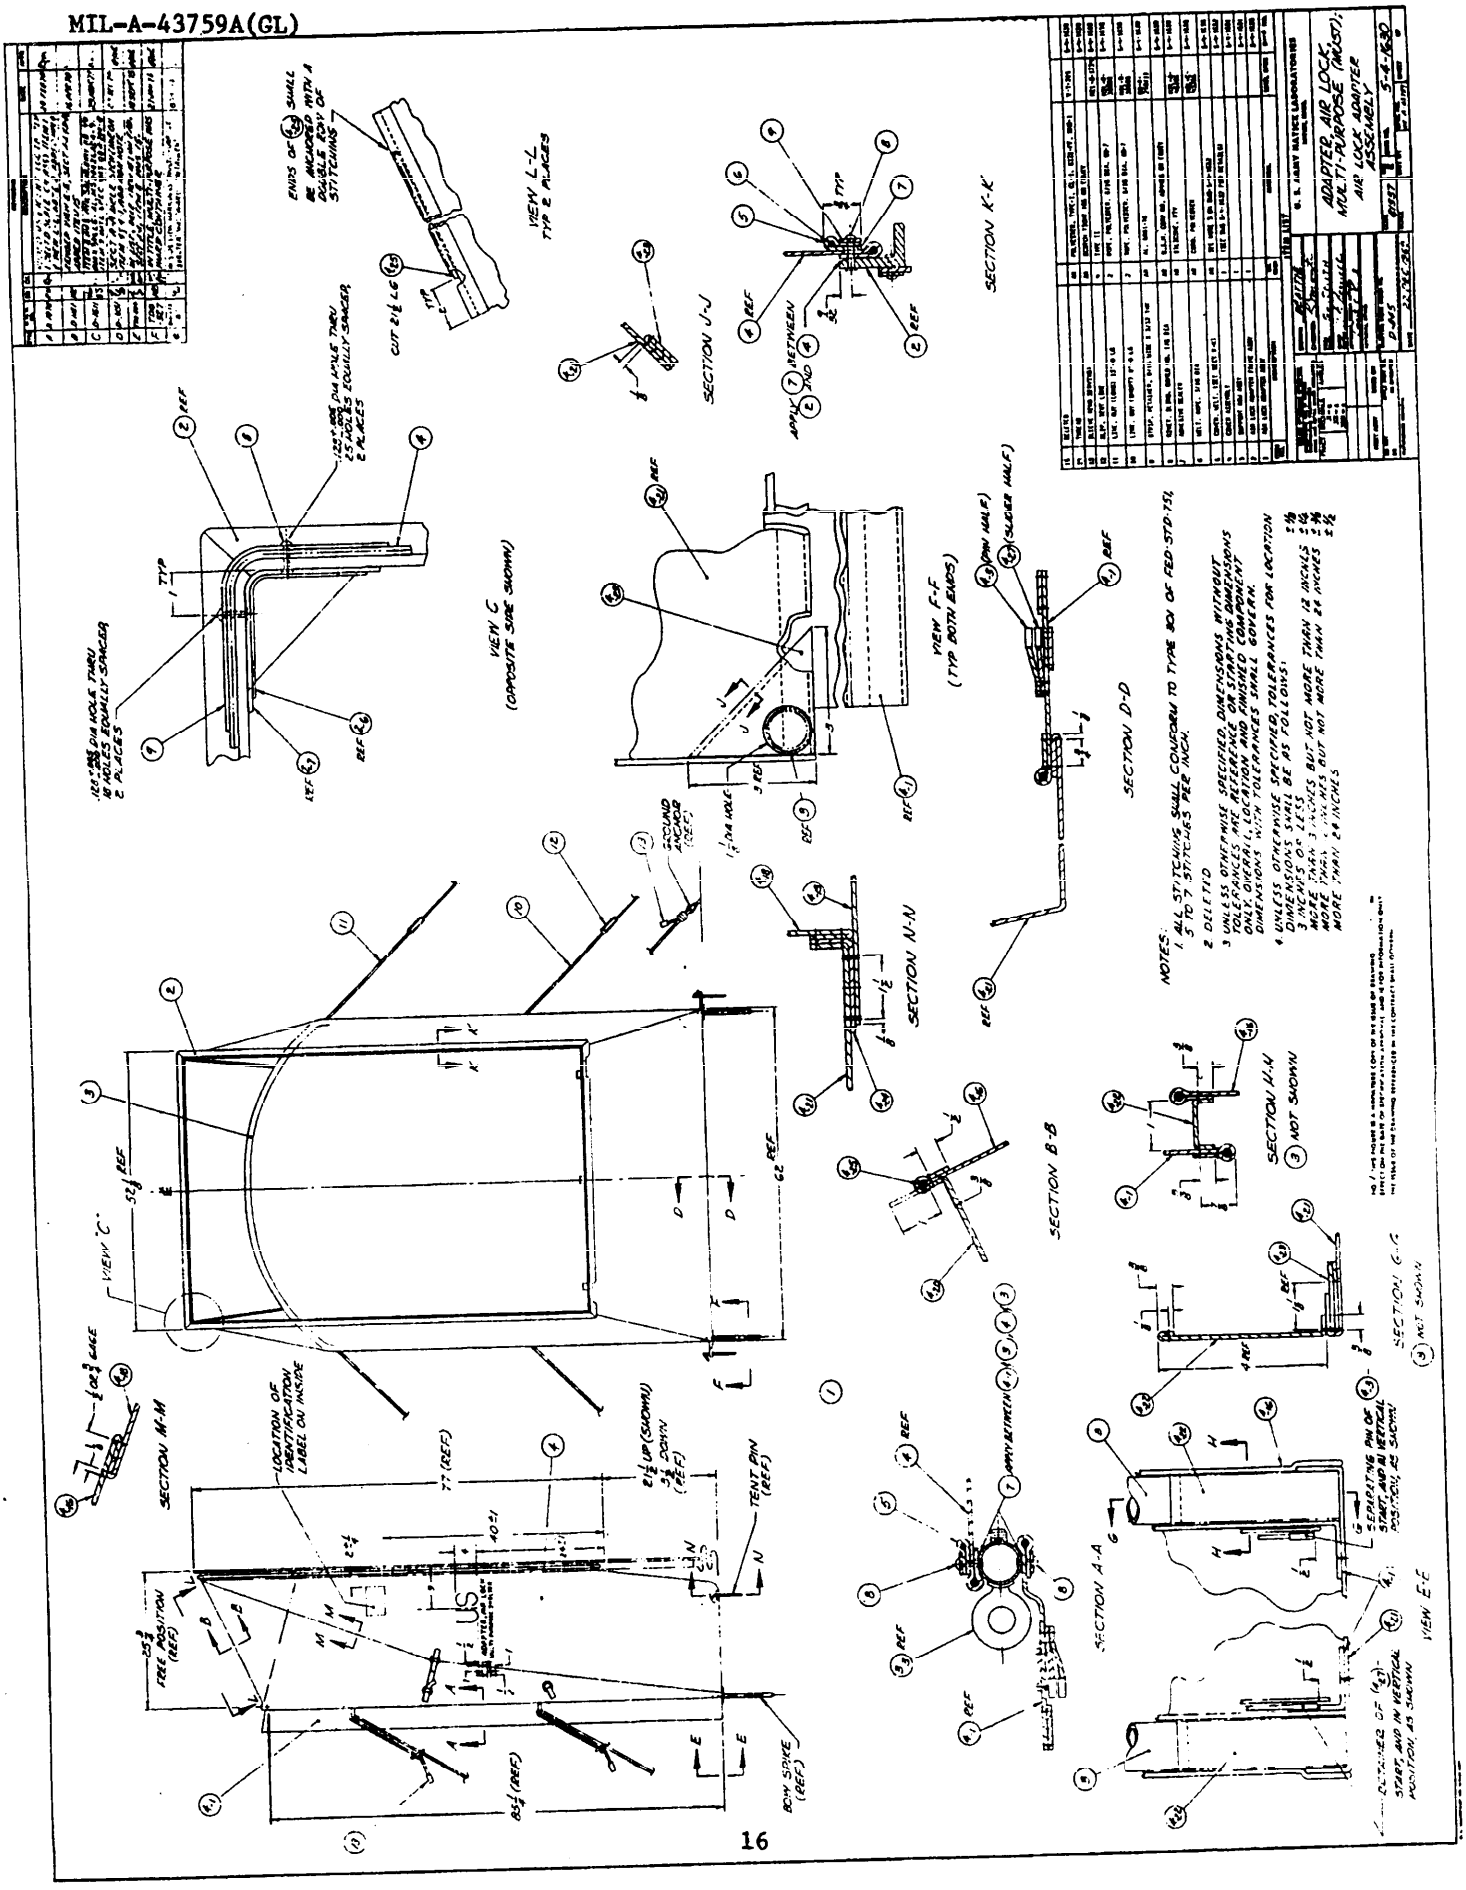

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:14Z
Check the source to verify that this is the currentversion before use.

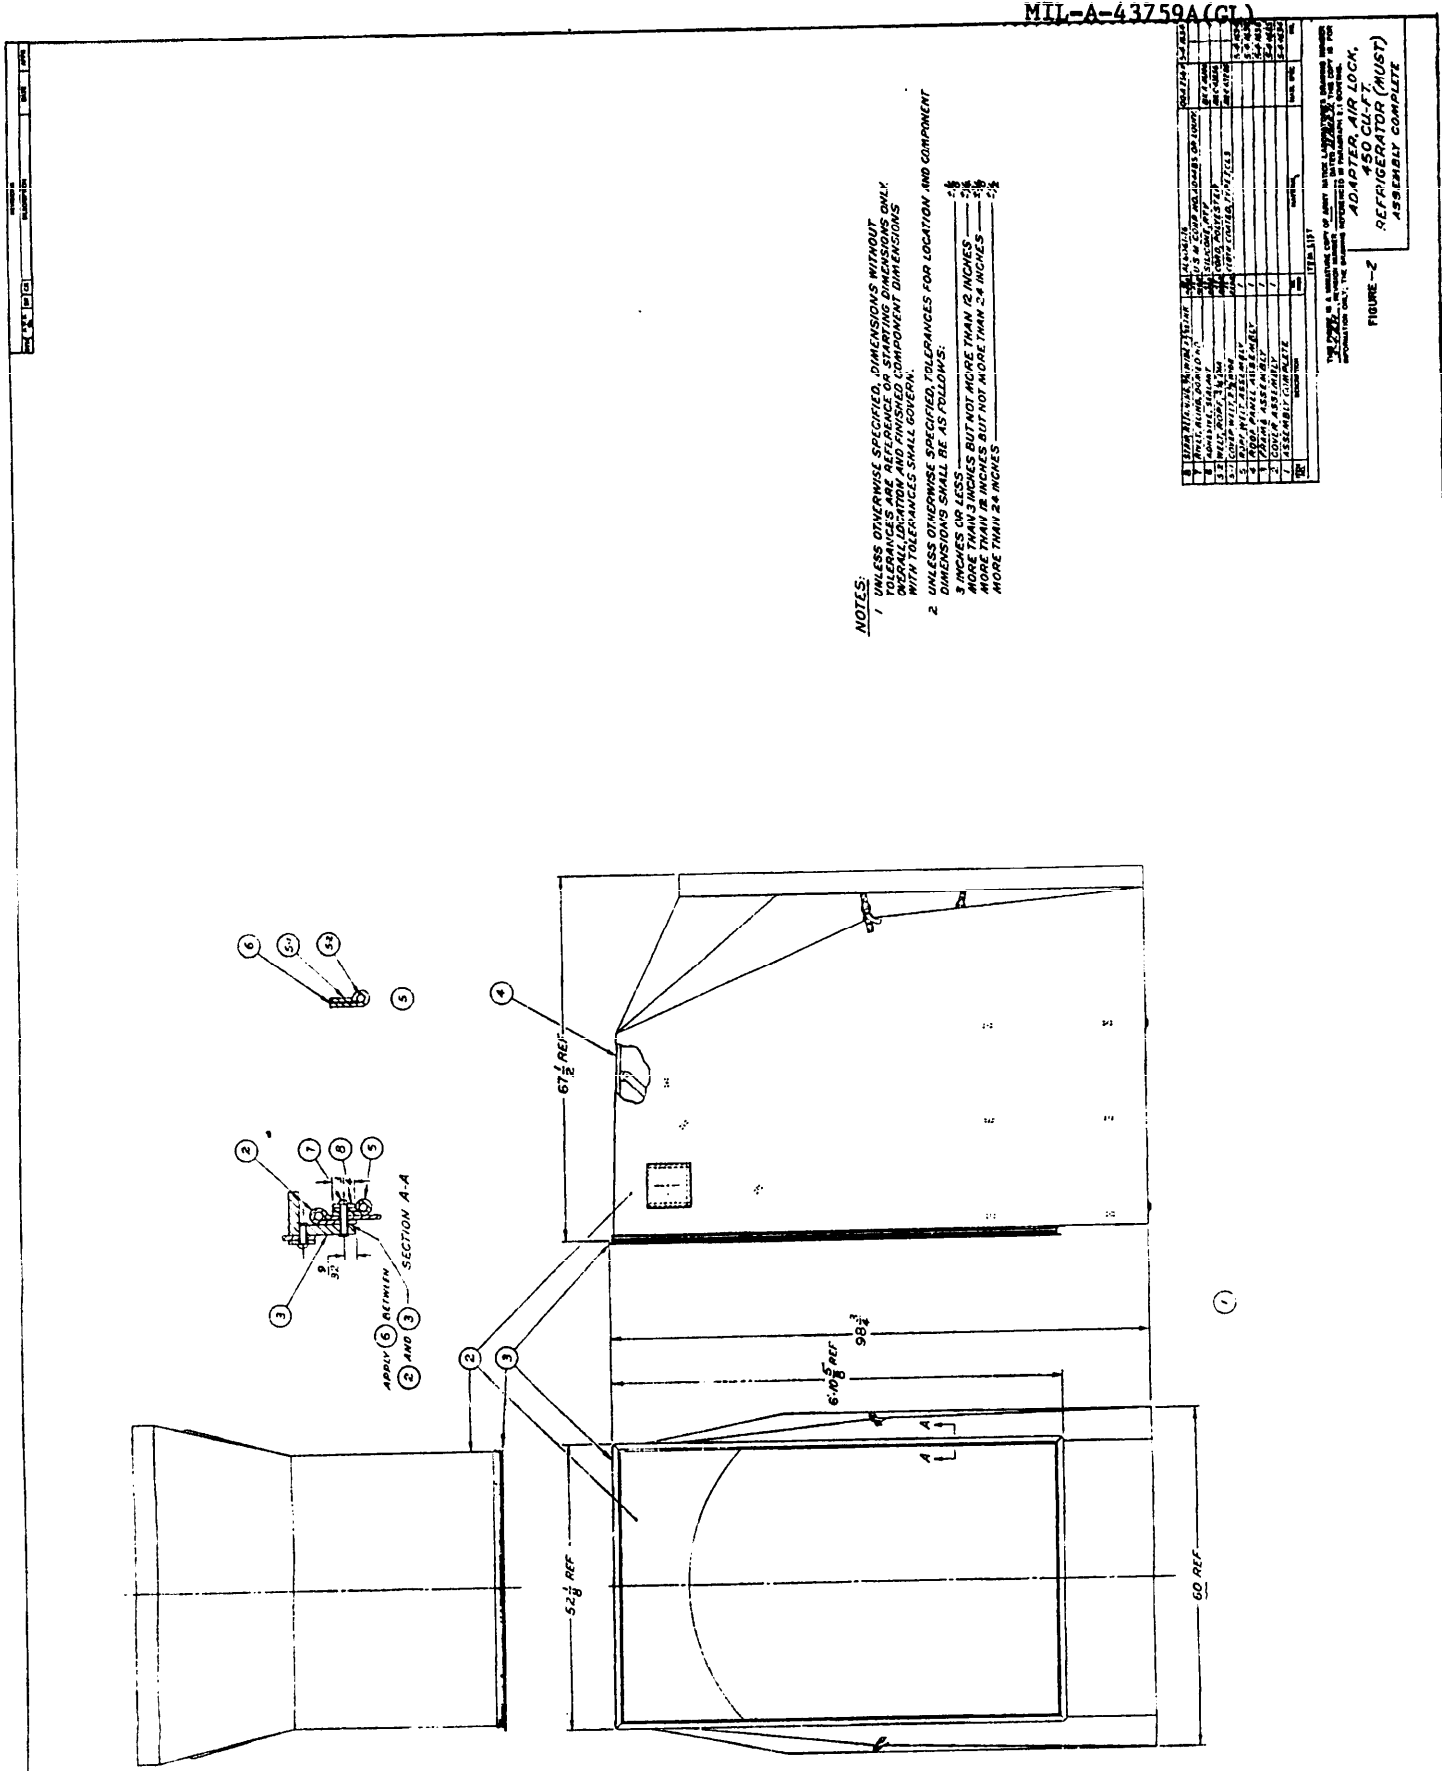

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:14Z
Check the source to verify that this is the current version before use.

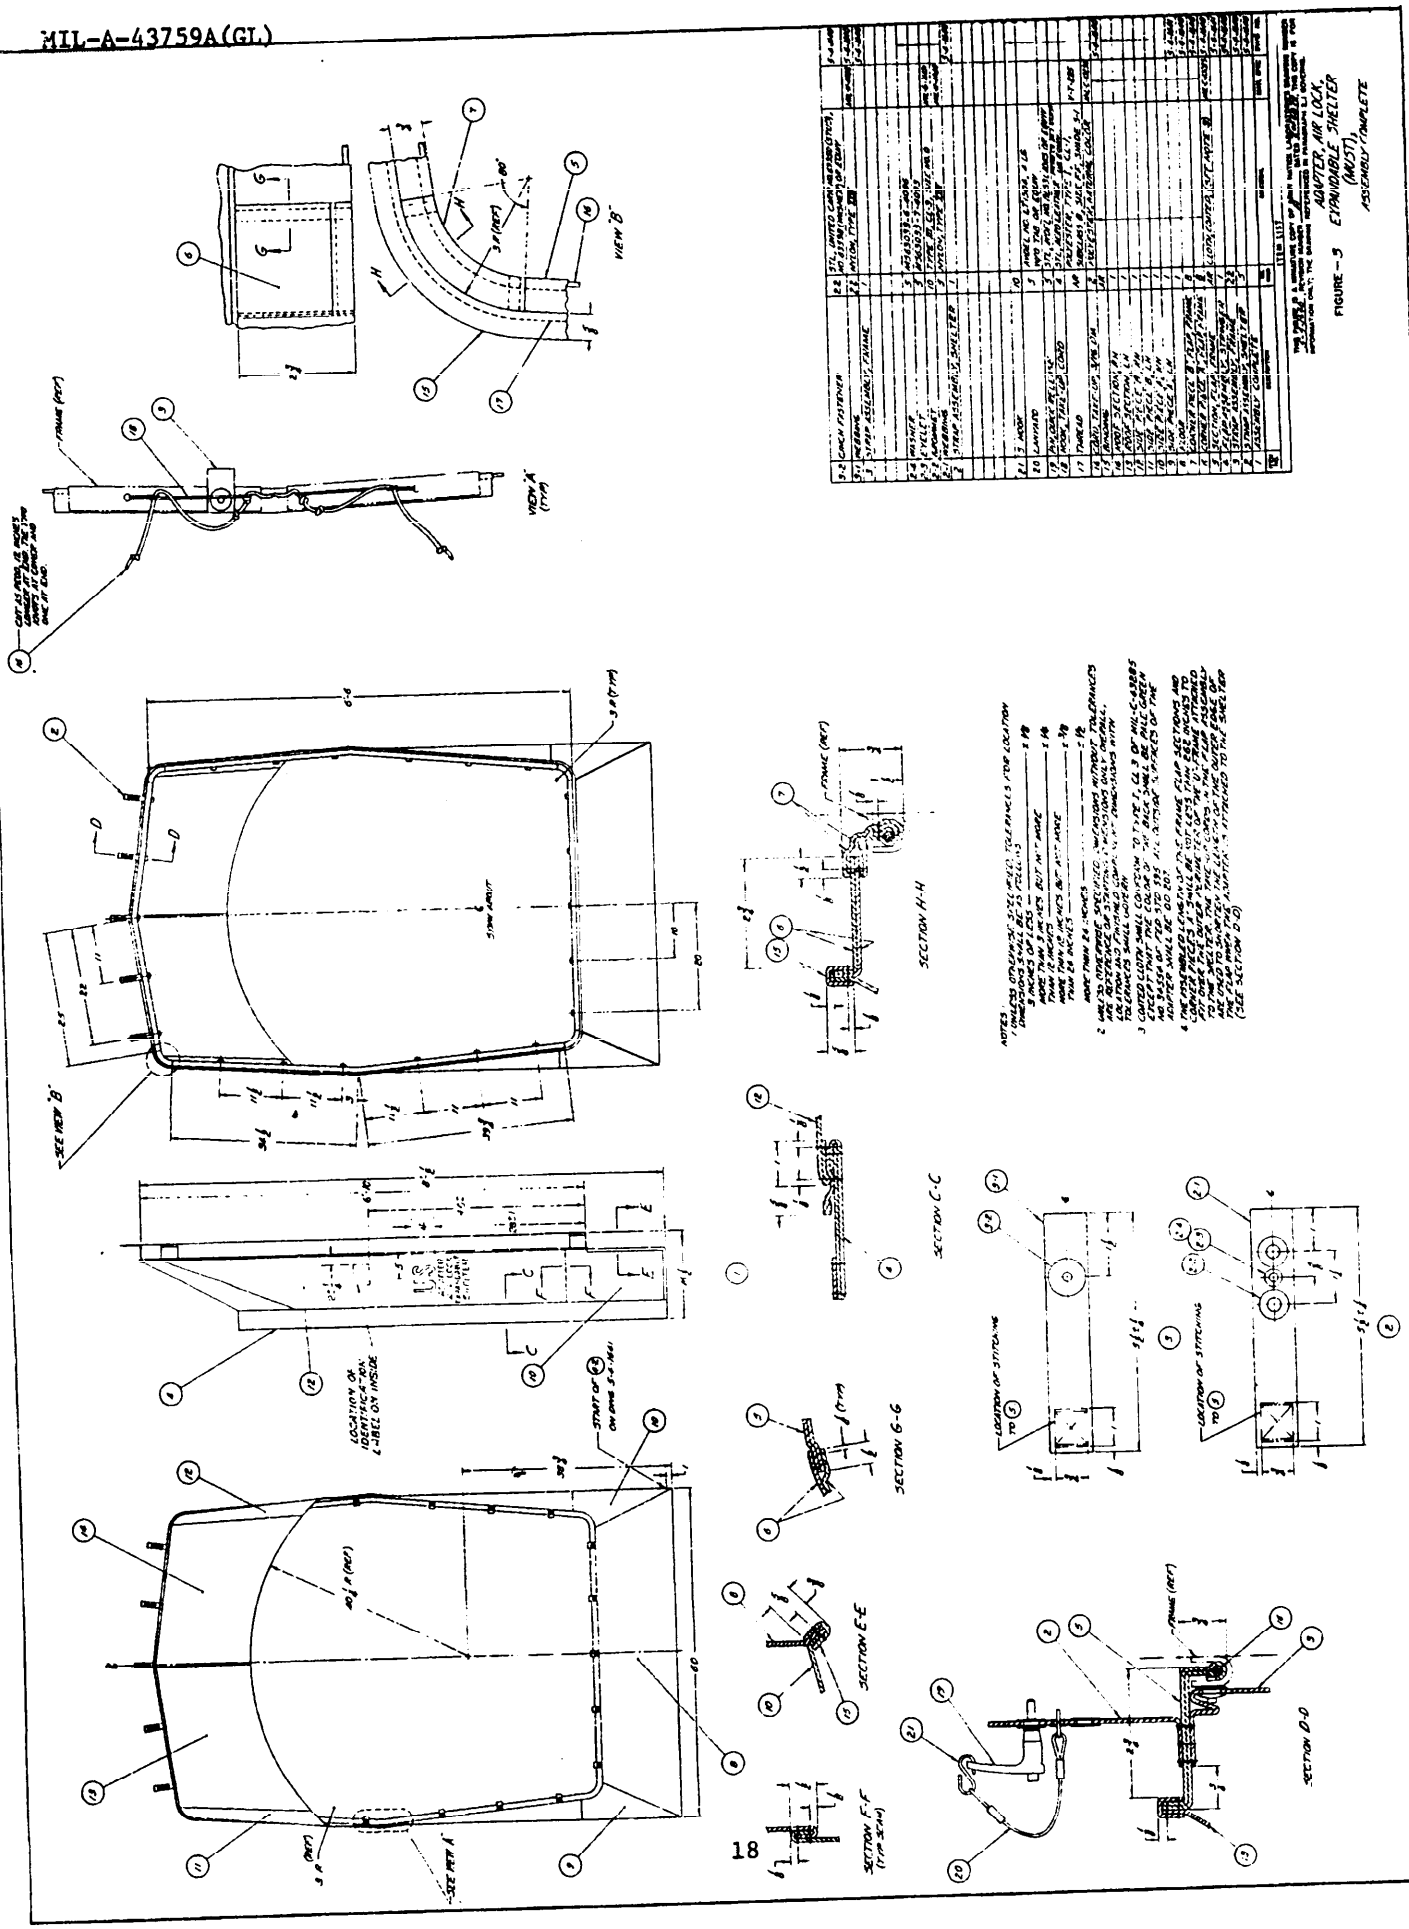


FIGURE - 5 EXPANDABLE SHELTER, AIR LOCK, ADAPTER, (MIST), ASSEMBLY COMPLETE

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-A-43759A(GL) Adapters, Air Lock, MUST

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:14Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Command
ATTN: DRDNA-ES
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:14Z
Check the source to verify that this is the current version before use.