7 October 1971
See 6.5

MILITARY SPECIFICATION

PACKBOARD, METAL

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the requirements for the design, materials and fabrication of one type of metal packboard.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-394	-	Plastic Molding Material, (Propylene Plastics, Injection and Extrusion)
V-T-285	-	Thread, Polyester
FF-R-556	-	Rivet, Solid, Small; Rivet, Split, Small; Rivet, Tubular, Small; Burr; and Cap, Rivet; General Purpose
DDD-L-20	-	Label; For Clothing, Equipage, and Tentage, (General Use)
PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-60	-	Tape: Pressure-Sensitive Adhesive, Waterproof, for Packaging
PPP-T-76	-	Tape, Pressure-Sensitive Adhesive Paper, (For Carton Sealing)

MILITARY

MIL-B-543	-	Buckles, Tongueless and Web Strap
MIL-R-3390	-	Rings, Dee

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:13Z
Check the source to verify that this is the current version before use.

MIL-W-4088 - Webbing, Textile, Woven Nylon
MIL-C-5040 - Cord, Nylon
MIL-H-9890 - Hardware, Individual Load Carrying Equipment: and Hardware, Miscellaneous
MIL-F-10884 - Fasteners, Snap
MIL-E-20652 - Eyelets, Metallic, With Washers
MIL-W-27265 - Webbing, Textile, Woven Nylon Impregnated
MIL-C-43128 - Cloth, Plain Weave, Nylon: Water Repellent, OG-106
MIL-C-43204 - Cloth, Spacer (Treated)
MIL-F-43356 - Frame, Rucksack, (Riveted), and Shelf, Cargo Support, (Lightweight)
MIL-S-43598 - Strap, Webbing, Waist, Rucksack
MIL-W-43668 - Webbing, Textile, Bulked Nylon
MIL-A-43671 - Adapter, Reversible, Quick-Fit, 1-3/4 Inch
MIL-P-43747 - Plate, Packboard; and Shelves, Cargo Support, Rucksack Frame

STANDARDS

FEDERAL

FED-STD-406 - Plastics: Methods of Testing
FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MS 51936 - Washer, Flat (Burr)
MS 63033 - Eyelets, Metallic, Rolled Deep Flange, with Washer, Style A

DRAWINGS

U.S. ARMY NATICK LABORATORIES

2-3-166 - Shoulder Straps; Lightweight Rucksack Frame
2-3-168 - Back Straps and Shoulder Strap Quick Release; Lightweight Rucksack Frame
2-3-228 - Packboard, Metal; Assembly of
2-3-275 - Billets, Shoulder Strap, Left and Right; Lightweight Rucksack Frame

(Figures 1 through 4 are miniature reproductions of referenced drawings and are attached for information only.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:13Z
Check the source to verify that this is the current version before use.

shall be one container. The sample size shall be the number of sample un

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Society For Testing Materials Standards

D 747-63 - Test for Stiffness of Plastics by Means of a Cantilever Beam

(Application for copies should be addressed to the American Society for Testing Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202, Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Guide sample.- Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from the specification may appear in the sample, in which case the specification shall govern.

3.2 First article.- When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.2 and 6.4).

3.3 Materials.-

3.3.1 Cloth, nylon.- The nylon cloth shall be Olive Green 106, water repellent conforming to MIL-C-43128.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:13Z
Check the source to verify that this is the current version before use.

3.3.2 Cloth, spacer.- The spacer cloth shall conform to MIL-C-43204, color optional.

3.3.3 Webbing, nylon.-

3.3.3.1 One inch wide.- The one inch wide nylon webbing shall conform to type III, Olive Drab 7 of MIL-W-43668.

3.3.3.2 Class R - types I, Ia, VIII and VIIIa.- The types I, Ia, VIII and VIIIa webbings, before treatment, shall conform to MIL-W-4088. The color of all webbings shall be Olive Drab 7.

3.3.3.2.1 Treatment.- The types I, Ia, VIII, and VIIIa webbings shall be resin impregnated to conform to class R of MIL-W-27265.

3.3.4 Cord, nylon.- The nylon cord shall be Olive Drab 7 conforming to type II of MIL-C-5040.

3.3.5 Thread, polyester.- The thread for all stitching shall conform to type I, class 1, sub-class A or B, size F of V-T-235.

3.3.5.1 Color.- The thread shall be dyed Olive Drab S-1 (C.A. 66022) and shall show fastness to weathering equal to or better than the standard sample. If no standard sample is available, the thread shall show good fastness to weathering.

3.3.6 Plastic stiffeners.-

3.3.6.1 Polyethylene.- The stiffener for the loop fastener shall be made from an unfilled, high modulus, virgin polyethylene material of natural color and shall be 0.093 ± 0.007 inch thick. The plastic pieces may be fabricated from sheet stock or molded to size with edges finished smooth. The finished pieces shall be uniform in texture and finish. The polyethylene material shall conform to the following minimum physical requirements when tested as specified in 4.3.1.1.

	Requirement (minimum)
Specific gravity	0.94
Tensile strength (pounds per square inch)	2,800
Stiffness modulus (pounds per square inch)	50,000
Distortion under heat at 66 pounds per square inch fiber stress (degrees Fahrenheit)	160

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:13Z
Check the source to verify that this is the current version before use.

3.3.6.2 Polypropylene.- The stiffener for the quick release strap shall be made from sheet stock virgin polypropylene material of natural color meeting requirements of type I of L-P-394. The sheet stock shall be 0.040 ± 0.005 inch thick. The plastic stiffener pieces shall be produced in such a manner that the long edges of the pieces shall have been parallel with the direction of extrusion (the long edges) of the roll of material from which they are fabricated. The finished pieces shall be uniform in texture and finish and the edges shall be smooth and free from cracks and sharp corners.

3.3.7 Frame, rucksack.- The rucksack frame shall conform to MIL-F-43356.

3.3.8 Plate, packboard.- The packboard plate shall conform to item 1 of MIL-P-43747.

3.3.9 Buckles, nonslip.- The buckles shall conform to type V, class 3, size one inch of MIL-B-543.

3.3.10 Adapter, reversible, quick fit, 1-3/4 inch.- The adapter shall conform to MIL-A-43671.

3.3.11 Dee rings.- The dee rings on the shoulder straps shall be configuration A, class 1, 25/32 inch by 3/8 inch of MIL-R-3390.

3.3.12 Fasteners, snap.- The snap fasteners on the shoulder straps and quick release strap for the shoulder strap shall be style 2A, finish 2 and the snap fasteners on the upper back strap assembly shall be style 2, finish 2, conforming to MIL-F-10884. The size of the button and eyelet components shall be determined by the supplier. The size selected shall effect a secure clinch of the assembled components.

3.3.13 Eyelets-washers.- The eyelets and washers shall conform to style A of MIL-E-20652 and dash numbers 1-4094 and 6-4096, respectively of MS 63033.

3.3.14 Rivets.- The rivets on the fastener loops shall be type XII, class 3, grade F, 9/64 inch nominal size, conforming to FF-R-556. The rivets shall be given a black chemical finish. The length shall be determined by the supplier. The length selected shall effect a secure clinch of the assembled components.

3.3.15 Burrs.- The burrs shall be brass, size No. 9 conforming to FF-R-556 and MS 51936-6.

3.3.16 Waist strap- The waist strap shall conform to MIL-S-43598.

3.3.17 Fastener, loop, male and female.- The male loop fastener shall be type III and the female loop fastener shall be type IV conforming to MIL-H-9890.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:13Z
Check the source to verify that this is the current version before use.

3.4 Construction.- The construction shall conform in all respects to the drawings listed in 2.1 and as specified herein.

3.4.1 Stitching, machine.- All stitching, except bartacking, shall conform to stitch type 301 with 8 to 10 stitches per inch of FED-STD-751.

3.4.1.1 Type 301 stitching.- Unless otherwise specified, ends of all type 301 stitching shall be backstitched or overstitched 1/2 inch minimum except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.4.1.1.1 Repairs of type 301 stitching.- Thread breaks and two or more consecutive skipped stitches or runoffs on type 301 stitching shall be overstitched not less than 1/2 inch in each direction beyond the defective stitching area. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner.

3.4.1.2 Automatic stitching.- Automatic machines may be used to perform any of the required stitch patterns provided the requirements for the stitch pattern, stitches per inch, size and type of thread are met; and at least three or more tying, overlapping or back stitches are used to secure the ends of the stitching.

3.4.1.3 Bartacking.- Bartacking shall be free from thread breaks and loose stitching, shall be 9/16 (+ 1/16, -0) inch long and 1/8 (± 1/32) inch wide, and shall contain 42 stitches.

3.4.1.4 Thread ends.- All thread ends shall be trimmed to a length of not more than 1/4 inch.

3.4.2 Setting of eyelets.- Holes punched to receive the eyelets shall be smaller than the outside diameter of the eyelet barrel. The eyelets shall be securely clinched in a manner that will prevent detachment from or cutting of the surrounding material. The eyelets shall be clinched without splitting.

3.4.3 Setting of style 2 and 2A snap fasteners.- The hole punched before inserting the male or female part of the fastener shall be smaller than the outside diameter of the fastener barrel so that the barrel must be forced through the hole. The fasteners shall be securely clinched without cutting the surrounding material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:13Z
Check the source to verify that this is the current version before use.

3.4.4 Setting of rivets.- All holes in webbing and polyethylene stiffeners shall be prepunched before insertion of the rivets. The holes in the webbing shall be smaller than the rivet so that the rivets must be forced through the holes. When installed, the clinched end of the rivet shall have a uniform roll that will effect a secure hold. All burrs shall be removed.

3.4.5 Ends of nylon cord and webbing.- All ends of nylon cord and webbing, including bias cuts, shall be fused. The apparatus used to fuse the webbing ends shall be capable of providing sufficient heat to provide smooth ends with the cut ends of the webbing yarns all fused together. Fusing of the webbing ends shall be accomplished prior to assembly for stitching.

3.4.6 Location marks.- Location and notice marks shall not be drilled.

3.5 Marking.- The identification marking shall be applied in the location shown on Drawing 2-3-223 and shall conform to type IV, class 5 of DDD-L-20. The letters "US" shall be applied in the location and in the size characters indicated on Drawing 2-3-223 and shall conform to type IV, class 9 of DDD-L-20. Fastness of the class 9 marking shall be as specified for class 5 marking.

3.6 Assembly.- The packboard components shall be assembled as shown or specified on Drawing 2-3-228.

3.7 Workmanship.- The finished packboard shall conform to the quality and grade of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance.- Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 First article inspection.- When required (see 6.2), the preproduction sample submitted in accordance with 3.2, shall be inspected as specified in 4.3.3 for compliance with design, construction, workmanship, dimensional and assembly requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:13Z
Check the source to verify that this is the current version before use.

4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except when otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.1.1 Testing of components.- Testing shall be performed on the polyethylene plastic stiffener for the characteristics listed in table II. The lot size shall be expressed in units of 100 stiffeners and the sample unit for testing shall be a 24 inch by 24 inch sheet of the plastic material. The sample size (number of sample units) shall be as specified in table I. For requirements applicable to the sample unit, the lot shall be unacceptable if one or more sample units fail to meet any specified requirement. For lot average requirements, the lot shall be unacceptable if the lot average fails to meet the specified requirements.

TABLE I.- Sample size

Lot size (units)	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

TABLE II.- Component testing of polyethylene plastic stiffener

Characteristic	Requirement para.	Test method	Requirement applicable to: Sample unit	Requirement applicable to: Lot average	No. of deter. per sple unit	Results reported as:
Material identification	3.3.6.1	1/	-	-	-	-
Color	3.3.6.1	Visual	X	-	1	Pass or fail
Thickness	3.3.6.1	Gage	X	-	1	Nearest 0.001 inch

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:13Z
Check the source to verify that this is the current version before use.

TABLE II.- Component testing of polyethylene plastic stiffener (cont'd)

Characteristic	Requirement para.	Test method	Requirement applicable to: Sample unit	Requirement applicable to: Lot average	No. of deter. per sple unit	Results reported as:
Specific gravity	3.3.6.1	Method 5011 of FED-STD-406	-	X	2	Nearest 0.01
Tensile strength	3.3.6.1	Method 1011 of FED-STD-406 2/	X	-	5	Nearest 10 psi
Stiffness modulus	3.3.6.1	ASTM D 747-63 3/	X	-	5	Nearest 100 psi
Distortion under heat	3.3.6.1	Method 2011 of FED-STD-406 4/	X	-	2	Nearest 1°F

1/ Acceptance of the requirements shall be made on the basis of a supplier's certification of compliance and analysis.

2/ At 20 inches per minute cross head speed, type I specimen, 1/8 inch.

3/ Specimen 1/16 inch thick, 1/2 inch wide, 2 inch span, 4 inch-pound moment load.

4/ Except that a composite sample shall be used and the load shall be adjusted to produce a fiber stress of 66 psi ± 2-1/2 percent.

4.3.2 In-process inspection.- Inspection shall be made during the manufacturing process to determine whether cut lengths and size of cut parts of the components listed below are in accordance with specified requirements for dimensions. In addition, inspection shall be made during the manufacturing process to insure that holes prepunched in webbing for receiving hardware, are prepunched smaller than the outside diameter of the barrel. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

Check for	Components	Drawing
Cut length	Attaching strap for shoulder straps	2-3-166
	Cord for strap release on right shoulder strap	2-3-166

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:13Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the United States Pharmacopeial

Check for	Components	Drawing
Cut length (cont'd)	Strap for left shoulder strap quick release	2-3-168
Cut part	Shoulder pad cover	2-3-166
	Shoulder pad filler	2-3-166
	Loop fastener stiffener	2-3-166

4.3.3 Examination of the end item.-

4.3.3.1 Frame, rucksack.- The rucksack frame shall be examined for visual and dimensional characteristics in accordance with the quality assurance provisions of MIL-F-43356.

4.3.3.2 Plate, packboard.- The packboard plate shall be examined for visual and dimensional characteristics in accordance with the quality assurance provisions of MIL-P-43747.

4.3.3.3 Strap, waist.- The waist strap shall be examined for visual and dimensional characteristics in accordance with the quality assurance provisions of MIL-S-43528.

4.3.3.4 Textile components.- The defects found during examination of the textile components and associated hardware shall be classified in accordance with the lists in 4.3.3.4.1 and 4.3.3.4.2. The sample unit for these examinations shall consist of one complete set of the packboard assembly textile components shown on Drawing 2-3-228.

4.3.3.4.1 Visual examination of textile components.-

Examine	Defect	Classification Major	Minor
Fabric	Any hole, cut or tear	X	
Webbing	Frayed or scalloped edges, not firmly or tightly woven	X	
	Not continuous, i.e., spliced	X	
	Ends not fused or not fused correctly, i.e., yarn ends not fused together or not smooth		X
	Ends not cut on a bias where required		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:13Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Cord	Cut, chafed or abraded	X	
	Ends not fused		X
Hardware:			
General	Broken or malformed; corroded areas; burrs or sharp edges	X	
	Finish omitted or not as specified:		
	- on brass or aluminum components		X
	- on steel components	X	
	Any required component not specified type	X	
	Any required component improperly installed causing failure to serve intended purpose	X	
Snap fasteners	Any fastener not functioning properly, i.e., fails to snap closed, provide a secure closure or to open freely	X	
	NOTE: The fasteners shall be snapped and unsnapped twice to determine whether parts of fastener separate freely and also effect a secure closure		
	Clinched excessively tight, cutting surrounding material	X	
	Clinched loosely, permitting either component to rotate freely		X
	Incorrect style	X	
Eyelets	Insecurely clinched to a degree that eyelet may become detached from material; clinched excessively tight cutting surrounding material	X	
	Eyelet barrel split		X
Rivets and burrs	Burrs omitted	X	
	Any rivet missing, loose or not clinched as specified	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:13Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Hardware: (cont'd)			
Adapter	Attached with friction bar facing wrong direction	X	
Seams and stitching:			
Open seams	Less than 1/2 inch		X
	1/2 inch or more	X	
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped stitches or runoffs occur.		
Seams and stitch types	Wrong seam or stitch type	X	
Stitch tension	Loose tension, resulting in a loose top or bobbin thread		X
	Tight tension, resulting in puckering of material		X
Stitches per inch	One to two stitches less than minimum specified		X
	Three or more stitches less than minimum specified	X	
	One or more stitches in excess of maximum specified		X
	NOTE: Variation in the number of stitches per inch, caused by the operator's speeding up the machine and pulling the material in order to sew over heavy places, or in turning corners, shall be classified as follows: (a) Within the minor defect classification -- no defect. (b) Within the major defect classification -- minor defect.		

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:13Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Seams and stitching: (cont'd)			
Stitching ends (on stitch type 301)	Not secured as specified (except where ends are held down by other stitching or turned under in a hem)		X
Thread breaks, skipped stitches or runoffs (on type 301 stitching)	Thread breaks, or two or more consecutive skipped stitches or runoffs overstitched less than 1/2 inch in each direction beyond the defective stitching area		X
NOTE:	Thread breaks or two or more consecutive skipped stitches or runoffs not overstitched shall be classified as open seams.		
Box stitching and W-W stitching	One row of stitching omitted		X
	Two or more rows of stitching omitted	X	
Bartacks	Loose, stitching incomplete or broken, number of stitches not as specified		X
	Any bartack omitted	X	
Cleanness	Grease, ink or oil stains clearly noticeable		X
	Thread ends not trimmed throughout as specified		X
Components and assembly	Any component or requirement operation omitted (unless otherwise classified herein)	X	
	Needle chews		X
	Mend, darn or patch	X	
Shoulder straps	Edges of shoulder pad cover folded improperly exposing raw edge of material		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:13Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Upper, middle and lower back straps	Ends of body webbing not folded under and caught in stitching		X
	Hanger "C" positioned improperly such that snap fastener cannot be closed without puckering webbing		X
Shoulder strap quick release strap	End of strap folded in opposite direction		X
	End of strap not folded under and sewn		X
	Improperly constructed preventing proper assembly or defective causing quick release not to function when released	X	
	NOTE: Each shoulder strap quick release fastener shall be secured to the left shoulder strap in its proper position and released to test its functional effectiveness.		
Identification marking	Omitted, incorrect, illegible, misplaced, or size of characters not as specified		X

4.3.3.4.2 Examination for dimensions of textile components.-

Examine	Defect	Classification Major	Minor
Dimensions, overall	Any smaller than nominal dimensions, less applicable minus tolerance indicated on drawings, but not smaller than nominal dimensions less twice the applicable minus tolerances		X
	Any smaller than nominal dimensions less twice the applicable minus tolerance	X	
	Any larger than nominal dimensions and applicable plus tolerance		X

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:13Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification Major	Minor
Shoulder straps	Shoulder strap web not centered on pad by 1/8 inch or more		X
Upper back strap	Hanger "C" not aligned with body strap by 1/8 inch or more		X
All dimensions other than outlined above including stitch margin and gauge	Any not within specified tolerance		X

4.3.3.4.3 Inspection level and acceptable quality level.- Inspection levels and acceptable quality levels (AQLs) expressed in defects per hundred units shall be as follows:

Examination	Inspection level	AQL
4.3.3.4.1 Visual examination of textile components	II	2.5 Major 15.0 Total major and minor defects combined
4.3.3.4.2 Dimensional examination of textile components	S-3	4.0 Major 10.0 Total major and minor defects combined

4.3.3.5 Packboard, complete.- Examination of the completely assembled packboard shall be conducted to determine conformance with 3.6. Defects shall be scored in accordance with the list below. The sample unit shall be one complete packboard assembly. The inspection level shall be S-4 and the acceptable quality level shall be 2.5 defects per hundred units.

Examine	Defect
Plate assembly	Not attached to rucksack frame securely at all four points of attachment.
Waist strap	Not attached to rucksack frame in proper location, buckles face wrong direction, not assembled and adjusted properly.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:13Z
Check the source to verify that this is the currentversion before use.

Examine	Defect
Backstraps	Buckles face wrong direction. Free ends of webbing face wrong direction. Webbing not contained in metal keepers on rucksack frame. (upper and middle backstraps) Webbing not threaded around vertical bar in D-section of the rucksack frame. (lower backstrap) Not adjusted tightly to the rucksack frame leaving slack in webbing.
Shoulder straps and quick release strap	Webbing not threaded through metal retainers on top of rucksack frame. Attached to incorrect sides, i.e., left strap attached to right side. Quick release strap not assembled to shoulder strap as specified.
Shoulder strap billets	Attached to incorrect sides, i.e., left billet attached to right side. Attached to rucksack frame incorrectly. Ends not secured to shoulder straps. End of right billet not knotted or knot not placed at end of billet.

4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:13Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling. Bulged or distorted container.
Content	Number of interior containers per shipping container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each completely assembled packboard shall be packaged in a fiberboard box conforming to style optional, grade V3c of PPP-B-636. Inside dimensions of each fiberboard box shall approximate 21-3/4 inches in length, 17-1/2 inches in width, and 5-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each fiberboard box shall be securely closed with 2 inch minimum width pressure-sensitive tape conforming to PPP-T-60 or PPP-T-76.

5.1.2 Level C.- Each completely assembled packboard shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.- Twenty-four packboards, packaged as specified in 5.1, shall be packed in a wood-cleated plywood shipping container conforming to overseas type, style A or I, grade A or B, type 2 load of PPP-B-601. Level A packages shall be packed on end three in length, eight in width and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 53-3/4 inches in length, 46-1/2 inches in width and 22 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be fitted with skids in accordance with the applicable requirements of PPP-B-601. Each shipping container shall be closed and reinforced in accordance with the appendix of PPP-B-601.

5.2.2 Level B.- Twenty-four packboards, packaged as specified in 5.1, shall be packed in a wood-cleated plywood shipping container conforming to domestic type, style A or I, grade B, type 2 load of PPP-B-601. Level A packages shall be packed on end three in length, eight in width and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 53-3/4 inches in length, 46-1/2 inches in width and 22 inches in depth. Approximate dimensions are furnished as a guide only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:13Z
Check the source to verify that this is the current version before use.

Each container shall be fitted with skids in accordance with the applicable requirements of PPP-B-601. Each shipping container shall be closed in accordance with the appendix of PPP-B-601.

5.2.3 Level C.- Packboards, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery to destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The packboard is used for carrying electronic equipment. When used with the modification kit conforming to MIL-M-43757, the AN/PRC-77 radio set with TSEC-KY-38 can be carried.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When a first article sample is required (see 3.2, 4.2 and 6.4).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 For access to samples, address the procuring activity issuing the invitation for bid.

6.4 First article.- When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample. The first article should consist of one packboard completely assembled. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.5 Supersession data.- This specification includes the requirements of Limited Production Purchase Description 9-68, dated 21 March 1968 for Packboard, Metal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:13Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - SA
Air Force - 11

Review activities:

Army - EL
Air Force - 82

User activity:

Navy - MC

Preparing activity:

Army - GL

Project No. 8465-0566

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:13Z
Check the source to verify that this is the current version before use.

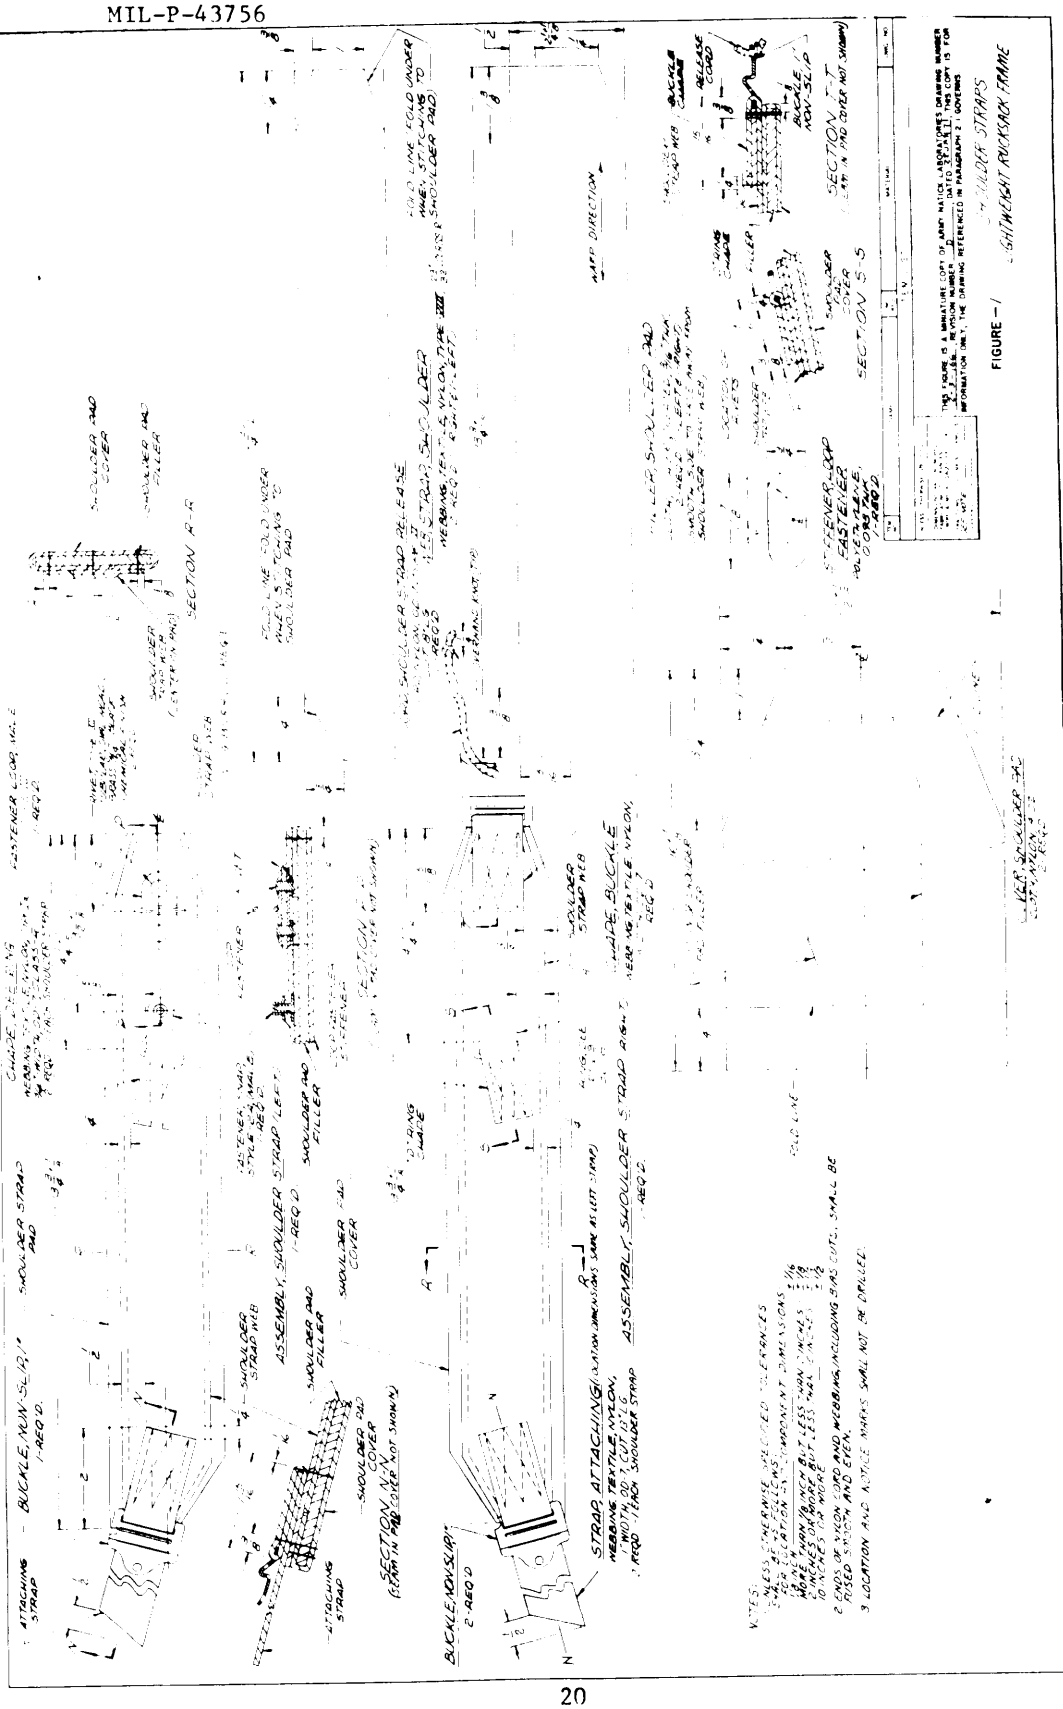


FIGURE - 1. SUSPENSION STRAPS
LIGHTWEIGHT RUCKSACK FRAME

Source: https://assist.dla.mil -- Downloaded: 20260-21T22:13Z
Check the source to verify that this is the current version before use.

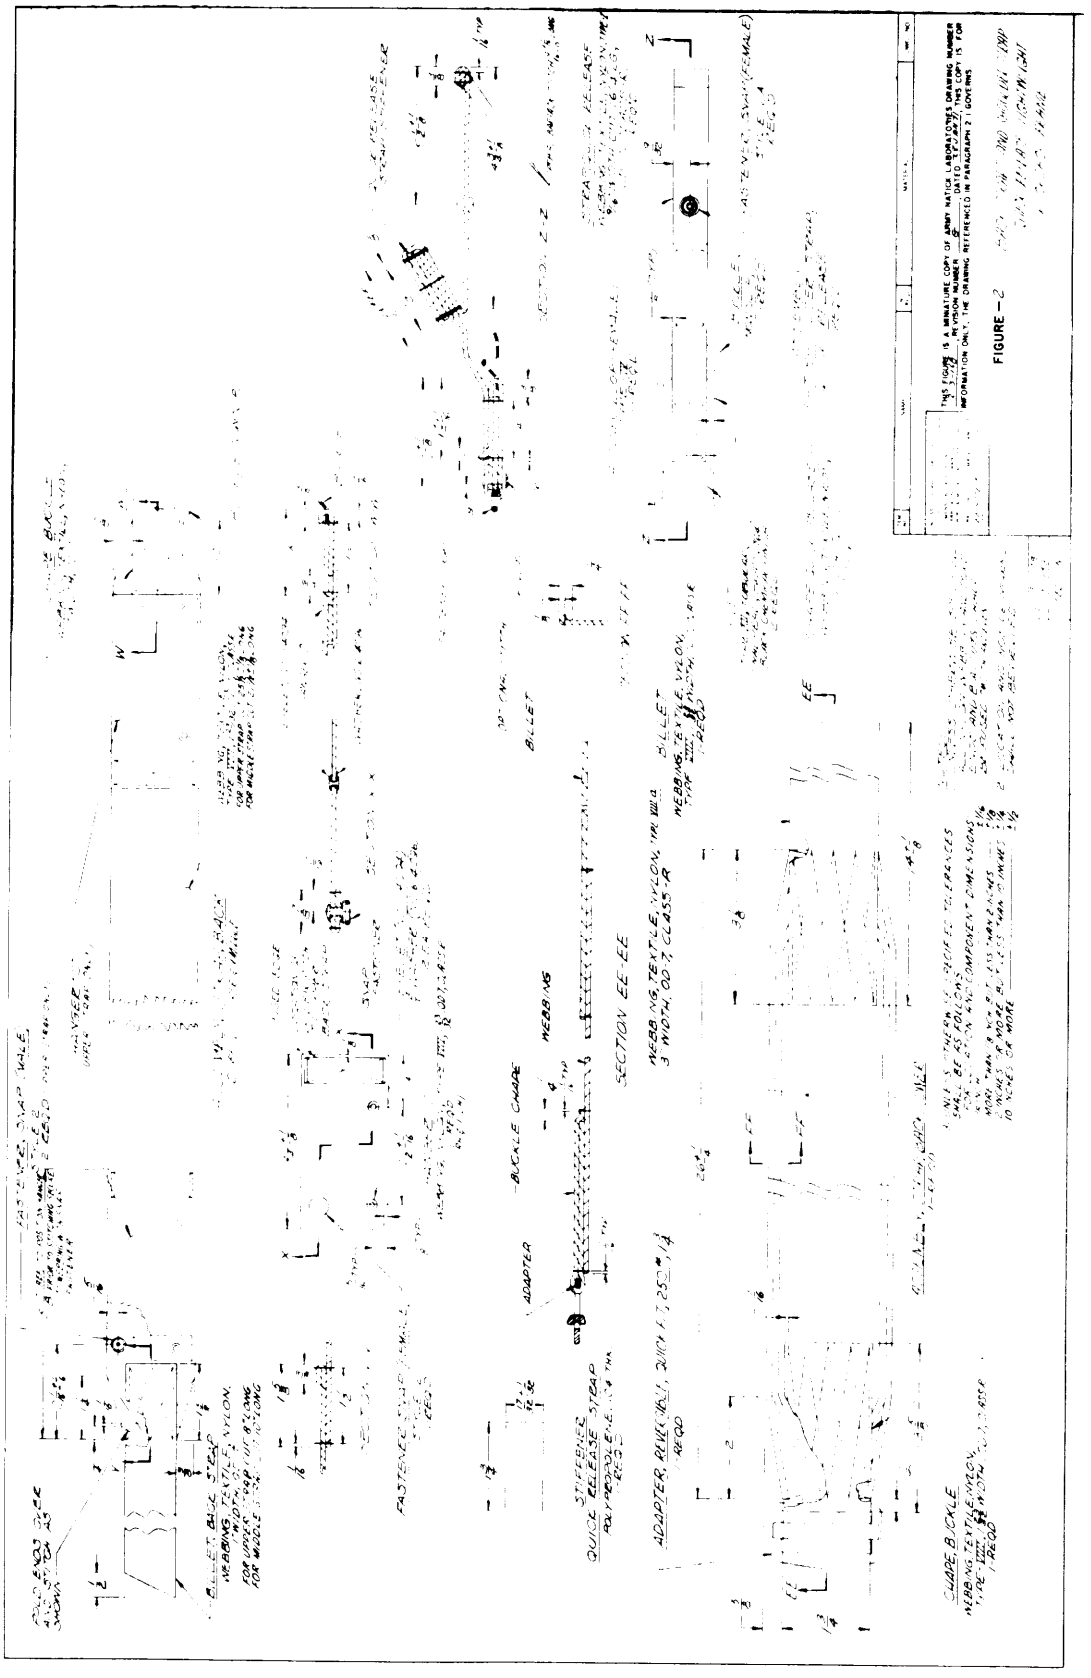


FIGURE – 2

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:13Z
Check the source to verify that this is the current version before use.

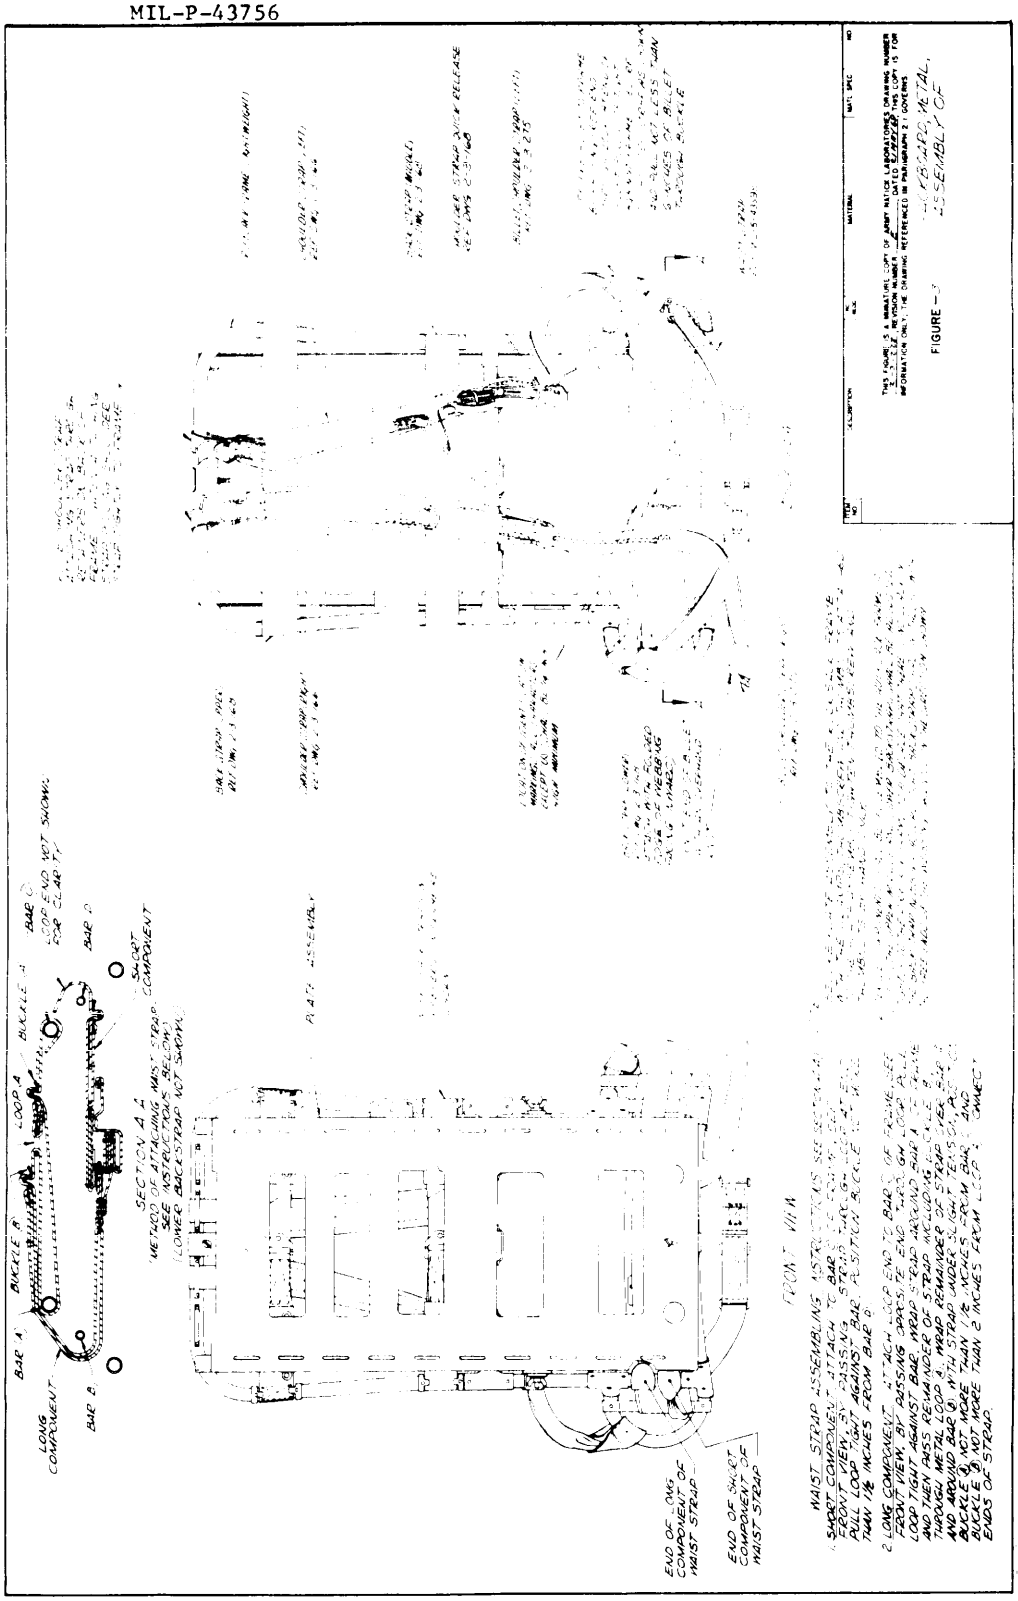


FIGURE 7. Typical metal assembly of parachute.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:13Z
Check the source to verify that this is the current version before use.

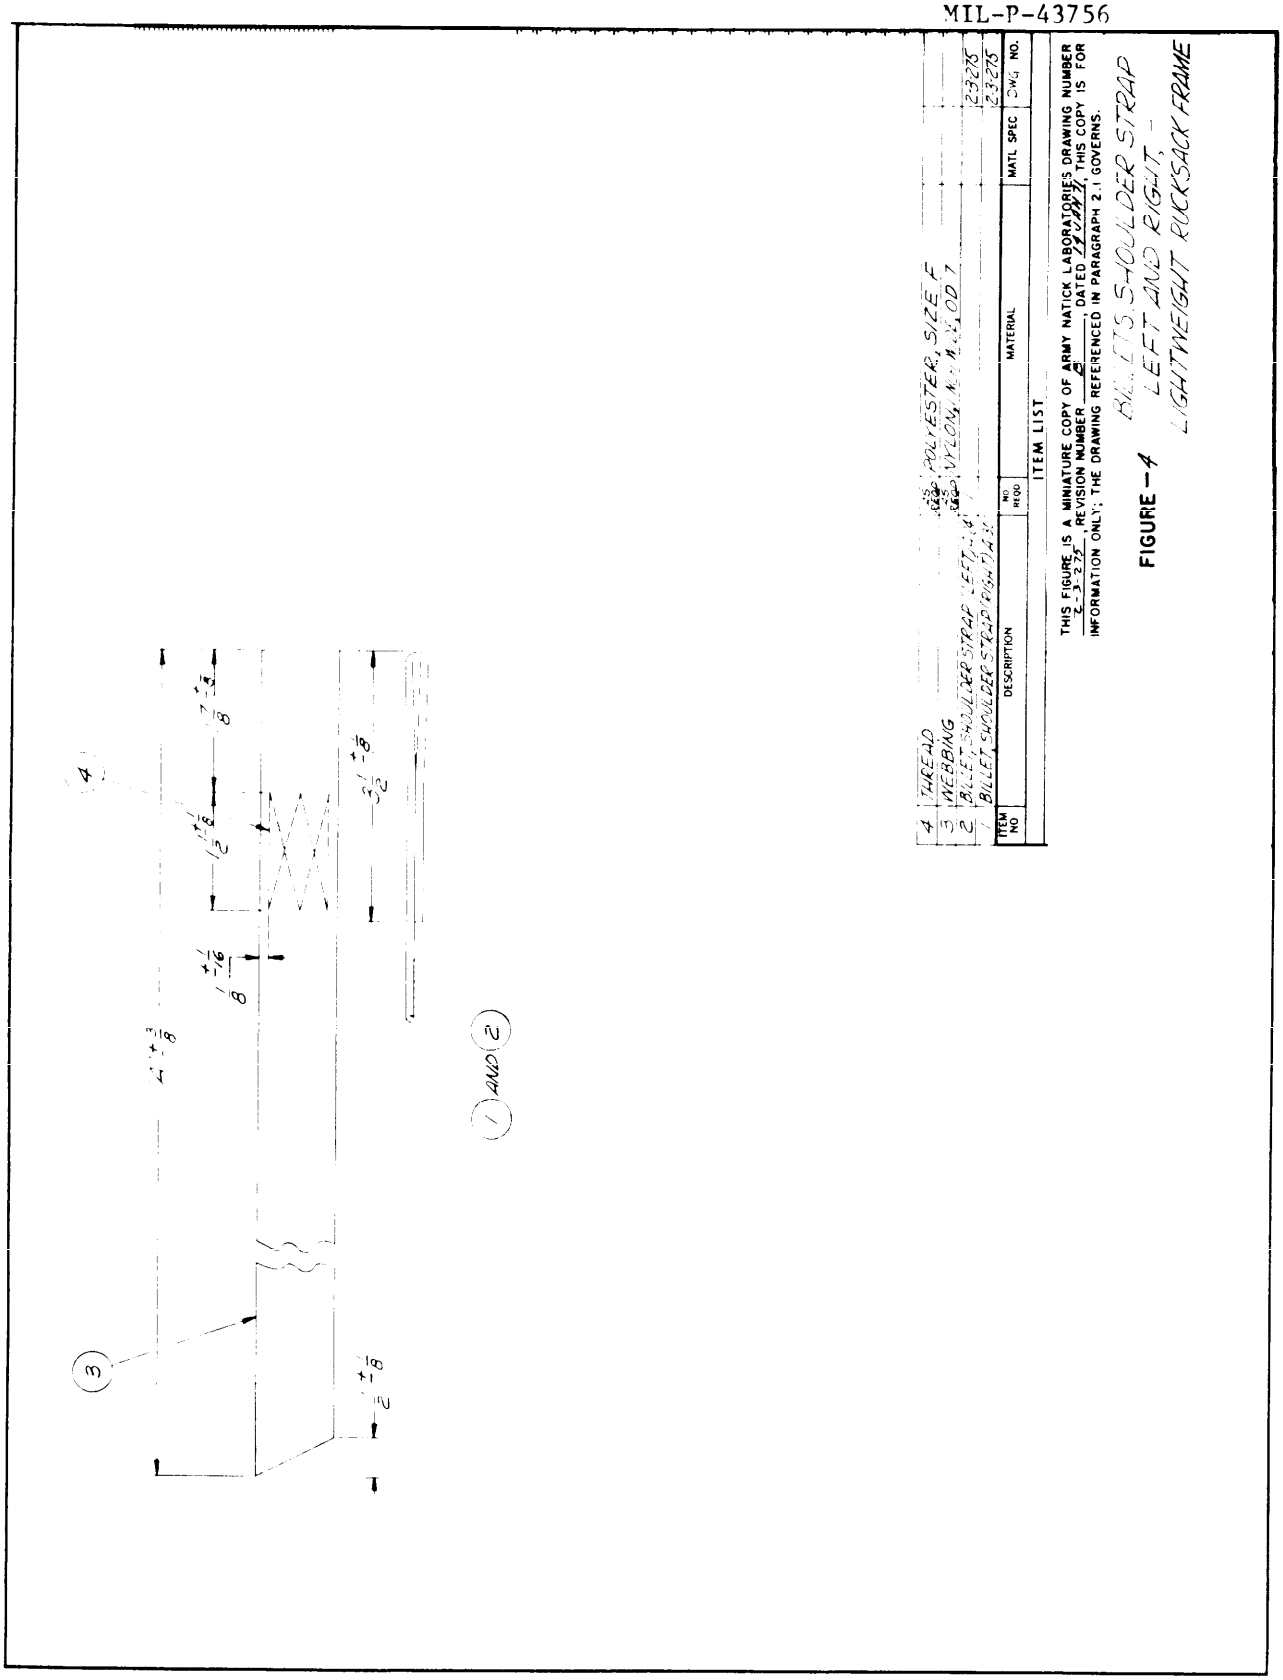


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:13Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
Packboard, Metal MIL-P-43756

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T22:13Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:13Z
Check the source to verify that this is the current version before use.