MIL-R-43767

10 March 1972

MILITARY SPECIFICATION

RETAINER (BUMPER) MATERIAL, LINER, TRASH CAN

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the requirements for one type and one size of trash and garbage can liner retainer material in coil form.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-636 - Boxes, Shipping, Fiberboard.

MILITARY

MIL-R-3065 - Rubber, Fabricated Products.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-417 - Rubber Compositions, Vulcanized General Purpose, Solid (Symbols and Tests).

(Copies of specifications, standards, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

FSC 8105

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:15Z
Check the source to verify that this is the current version before use.

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Material.-

3.1.2 Rubber.- The liner retainer material shall be extruded rubber conforming to the requirements of class, grade and suffix letters SC610A_1G of MIL-R-3065 and MIL-STD-417 (see 4.1.1 and 4.2.1).

3.2 Design and construction.- The liner retainer shall be fabricated of the material specified in 3.1.2 and extruded in a continuous length. When cooled, the extruded liner retainer shall assume approximately the cross section design illustrated in figure 1.

3.3 Size.- The liner retainer material shall conform to the dimensions specified in figure 1. The dimensional tolerances shall be as specified in MIL-R-3065 for extruded rubber shapes.

3.4 Form and length.- The liner retainer material shall be furnished in coils. Lenth of coils shall be not less than 50 feet.

3.5 Color.- At the option of the supplier, the liner retainer material shall be of any color. The color shall be uniform throughout the material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:15Z
Check the source to verify that this is the current version before use.

3.6 Workmanship.- The liner retainer material shall be well finished, clean, free from cuts, tears, cracks or other imperfections which might impair its usefulness, and all edges shall be smooth. The occurrence of defects shall not exceed the acceptable quality levels established herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificates of compliance.- Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Inspection of components and materials.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. Components and materials listed below may be accepted on the basis of a supplier's certificate of compliance to the contracting officer for the requirements specified in the applicable paragraphs of this specification.

Component	Characteristic	Requirement Paragraph
Rubber	Composition	3.1.2

4.2.2 Inspection of the end item.- The end item shall be examined for the defects listed in 4.2.2.1 and 4.2.2.2. The lot shall be expressed in units of 1 linear foot of liner retainer material. The sample unit shall be 1 linear foot of liner retainer material. The inspection levels and acceptable quality levels shall be as specified in 4.2.2.3.

4.2.2.1 Visual examination of the end item.- The liner retainer material shall be examined for defects in design, construction, appearance, material and workmanship.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:15Z
Check the source to verify that this is the current version before use.

Examine	Defect
Design	Does not conform to specified design.
Appearance	Texture and finish not uniform.
Material	Color not uniform. Not fabricated from rubber material.
Workmanship	Edges not smooth. Not free from cuts, tears and cracks. Not clean - evidence of dirt, grit, oil stains or other foreign matter. Any malformation.

4.2.2.2 Dimensional examination.- The liner retainer material shall be examined for dimensional defects. Any dimension that is not within the specified tolerance shall be classified as a defect.

4.2.2.3 Inspection levels and acceptable quality levels (AQLs).- The inspection levels and the AQLs expressed in defects per 100 units shall be as follows:

Examination Paragraph	Inspection Level	AQL
4.2.2.1	1	2.5
4.2.2.2	S-2	4.0

4.2.3 Examination of preparation for delivery requirements.- An examination shall be made to determine that the packaging, packing and marking complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior)	Omitted, incorrect, illegible, or improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:15Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components such as, incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling. Bulging or distortion of container.
Content	Inadequately secured. Ties less than specified.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.- Each coil of liner retainer material shall be secured with a minimum of 3 equally spaced ties of cord, tape, or rope passing through the coil center to the outside and knotted on the circumference of the coil.

5.1.2 Level C.- Each coil of liner retainer material shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A.- One coil of liner retainer material packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style FTC or OPF, grade V2s of PPP-B-636. Each container shall be closed by means of tape and reinforced in accordance with the applicable requirements of the appendix of PPP-B-636.

5.2.2 Level B.- One coil of liner retainer material packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style FTC or OPF, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Each container shall be closed by means of tape in accordance with the applicable requirements of method II as specified in the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:15Z
Check the source to verify that this is the current version before use.

5.2.3 Level C.- Coils of liner retainer material packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers, shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The rubber liner retainer material covered by this specification is intended for use in making retainers-bumpers to hold trash and garbage can liners in place and to provide a resilient "bumping" surface for mess kits, etc.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Selection of the applicable levels of packaging and packing (see 5.1 and 5.2).
(c) When weather resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Custodians:

Army - GL
Navy - SA
Air Force - 84

Review activity:

Army - MD

User activities:


Army - CE, SM

Preparing activity:

Army - GL

Project No. 8105-0234

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:15Z
Check the source to verify that this is the current version before use.

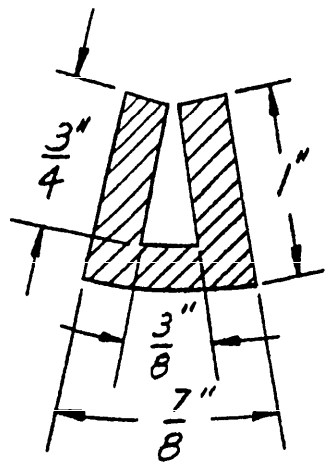

NOTE: LENGTH AS REQUIRED

CONFIGURATION AND DIMENSIONS OF EXTRUDED RUBBER RETAINER (NATURAL DEFORMATION)

FIGURE 1 RETAINER, LINER, TRASH CAN

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:15Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:15Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-R-43767 - Retainer (Bumper) Material, Liner, Trash Can

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 20261O-21T22:15Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T22:15Z
Check the source to verify that this is the current version before use.