MILITARY STANDARD

MIL-STD-1322-714
(NAVY)

2 DECEMBER 1982

SUPERSEDING WR-53/714E
18 NOVEMBER 1976

UNIT LOAD
FOR DOMESTIC AND OVERSEAS SHIPMENT
MINE UNDERWATER : MK 55 AND MODS
IN CRATE MK 55 MOD 1 (LD 538045)
(LOADED)

UNIT LOAD DATA

DODIC/ NALC NO.	MINE MK 55 MOD	CONFIG-URATION	GROSS WEIGHT (APPROX) LBS:* CRATED MINE	UNIT LOAD
U 875	1	B	2185	2206
U 876	1	C	2163	2184
U 877	1	D	2155	2176
U 887	2	B	2263	2284
U 888	2	C	2229	2250
U 889	2	D	2221	2242
U 899	3	B	2276	2297
U 900	3	C	2239	2260
U 901	3	D	2231	2252
U 911	4	B	2168	2189
U 912	4	C	2160	2181
U 913	4	D	2135	2156
U 923	5	B	2422	2443
U 924	5	C	2236	2257
U 925	5	D	2232	2253
U 929	6	B	2380	2401
U 930	6	C	2247	2268
U 931	6	D	2232	2253
U 935	7	B	2325	2346
U 936	7	C	2315	2336
U 937	7	D	2285	2306


* DO NOT USE FOR SHIPPING PURPOSES .

NUMBER OF MINES PER UNIT LOAD 1
WEIGHT OF WOOD SKIDS ..... 17 LBS
WEIGHT OF STEEL STRAPPING ..... 4 LBS
CUBE ..... 45.3 CU. FT.
CRATE DIMENSIONS ..... 84 L X 28 3/4 W X 28 7/8 H
UNIT LOAD DIMENSIONS ... 84 L X 28 3/4 W X 32 3/8 H

DO NOT STACK MORE THAN
5 UNIT LOADS HIGH IN STORAGE

HAZARD CLASSIFICATION

DOT - CLASS A
CG - CLASS X-A

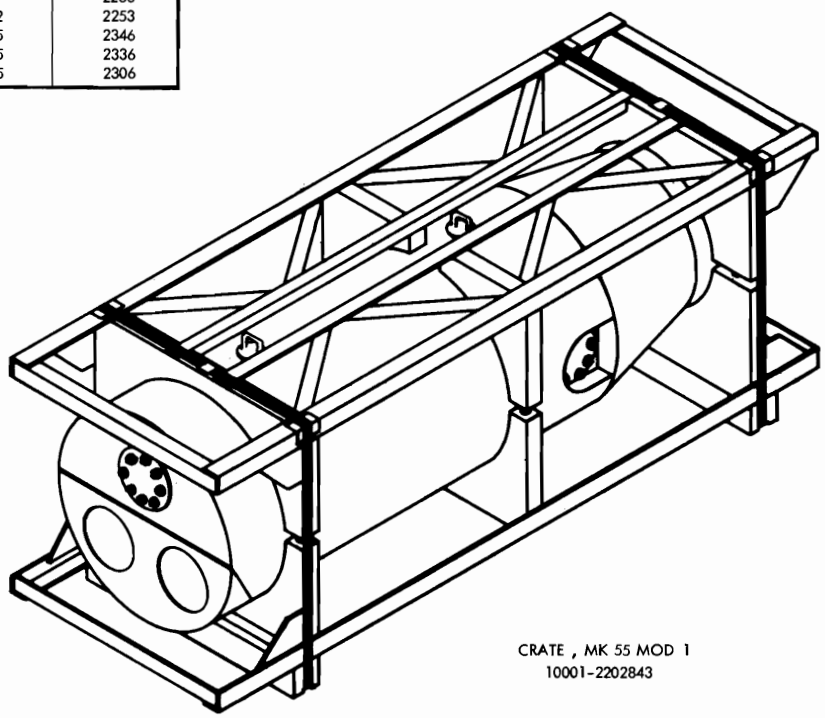

CRATE , MK 55 MOD 1
10001-2202843

NOTES :
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236(NAVY).

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR DEPOT HANDLING AND STORAGE AND FOR SHIPMENT BY COMMON CARRIER.

M.S. Gray NWHC — 11/30/82
SIGNATURE TECHNICAL DIRECTION AGENT (TDA) — DATE

SIGNATURE — SEASYSCOM BY DIRECTION — DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1322.

ORIGINATOR — 11/30/82
DATE

NAVAL WEAPONS HANDLING CENTER
WPNSTA EARLE, NEW JERSEY

Source: https://assist.dla.mil — Downloaded: 2026-10-23T23:54Z
Check the source to verify that this is the current version before use.


PROCEDURE FOR ATTACHING SKIDS

(a) POISTION SKID ASSEMBLIES UNDER MINE CRATE AS SHOWN IN DETAIL A AND DETAIL B.

(b) THREAD STRAPPING, ITEM 4, THROUGH SLOT IN SKID, AROUND EDGE PROTECTOR, ITEM 6, AND CRATE, TENSION AND DOUBLE NOTCH SEAL, ITEM 5.

MARKING :

IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL - STD - 129 .

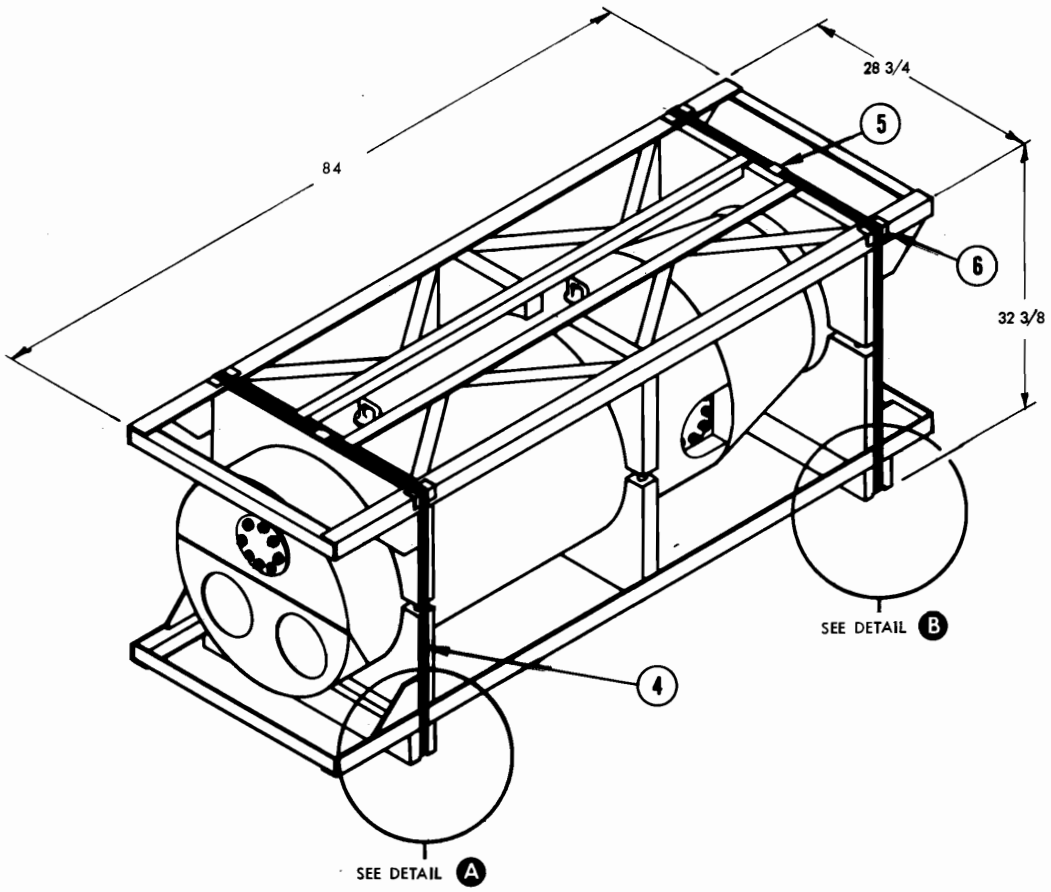

PROCEDURE FOR REMOVING SKIDS

(a) CUT AND REMOVE STRAPPING .

(b) REMOVE EDGE PROTECTORS .


(c) REMOVE SKID ASSEMBLIES .

NOTE : 1. .031 COLD ROLLED, HEAT TREATED, MAY BE SUBSTITUTED.
2. DO NOT USE TYPE I STRAPPING WITH POWER MACHINES.
3. UNLESS OTHERWISE SPECIFIED, ALL MATERIAL SHALL BE IN ACCORDANCE WITH MIL - STD - 1322 .


REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
4	6	EDGE PROTECTOR	SEE NOTE 3	
2	5	SEAL	SEE NOTE 3	1 1/4
2	4	STRAPPING	SEE NOTES 1,2 &3	1 1/4 X .035 X 11 FT
12	3	NAIL, PALLET	SEE NOTE 3	2 X .120
2	2	RESTRAINER	SEE NOTE 3	1 X 2 X 24 1/2
2	1	SKID	SEE NOTE 3	4 X 4 X 28 5/8

LIST OF MATERIALS


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:54Z
Check the source to verify that this is the current version before use.

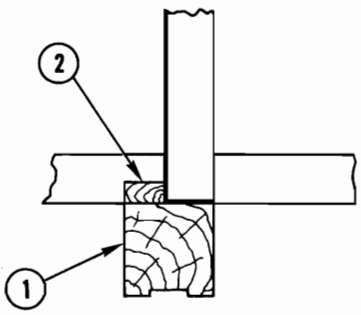


DETAIL A

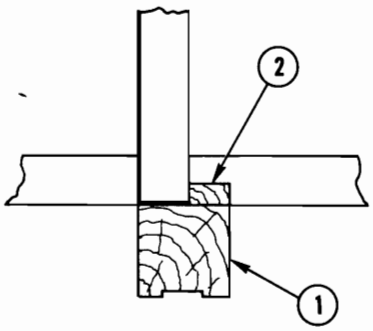

DETAIL B

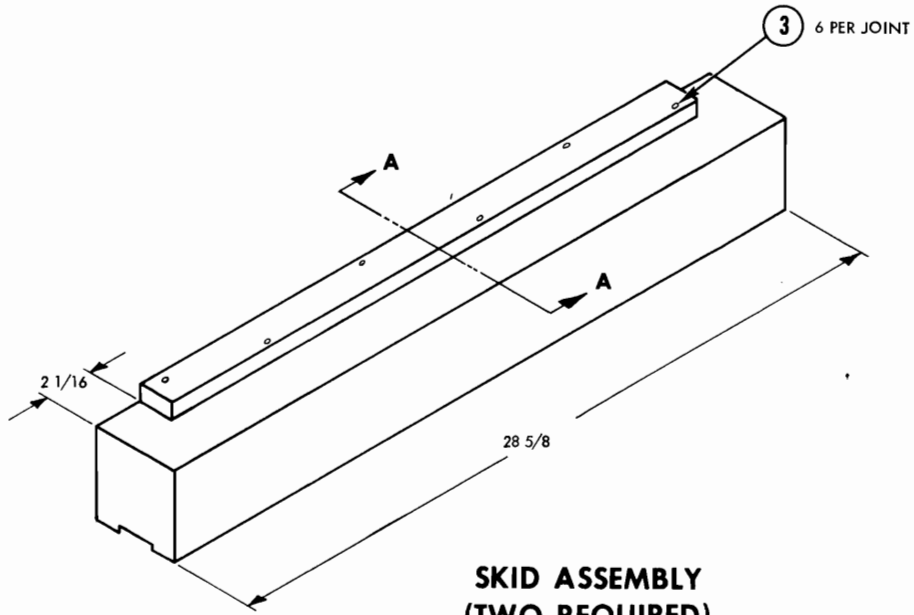

SKID ASSEMBLY
(TWO REQUIRED)

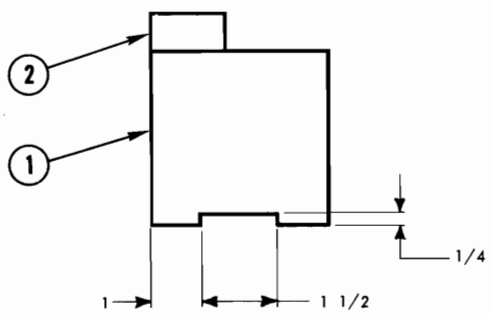

SECTION A-A

REVIEW ACTIVITY :
NAVY - OS

PREPARING ACTIVITY :
NAVY - OS
(PROJECT NO. 8140 - N563)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:54Z
Check the source to verify that this is the current version before use.

U.S. GOVERNMENT PRINTING OFFICE: 1983-605-034/428