Metric

A-A-59113B
27 September 2024
SUPERSEDING
A-A-59113A
16 April 2015

COMMERCIAL ITEM DESCRIPTION

LUBRICATING OIL, MACHINE TOOL SLIDEWAYS

The General Service Administration has authorized the use of this commercial item description, for all federal agencies.

1. SCOPE. This commercial item description (CID) covers two types of lubricating oils that are intended for application as a lubricant in machine tool slideways.

2. CLASSIFICATION. The lubricating oil, machine tool slideways shall conform to the following types:

2.1 Type. Type I - Medium.
Type II - Heavy.

3. SALIENT CHARACTERISTICS

3.1 Viscosity requirements. When tested in accordance with ASTM D445, the kinematic viscosity of the slideway lubricating oils (millimeter squared per second (mm^2/s) at 40 degrees Celsius (°C)) shall be in the range of 61.0 - 75.0 for Type I and in the range of 195.0 - 238.0 for Type II.

3.2 Flash point requirements. The slideway lubricating oil shall have a minimum flash point of 165.6°C for Type I and 176.7°C for Type II when tested in accordance with ASTM D92.

3.3 Pour point. The slideway lubricating oil shall have a maximum pour point of -6 ºC when tested in accordance with ASTM D97.

3.4 Copper strip corrosion. The slideway lubricating oil shall have a maximum classification of 1 when tested in accordance with ASTM D130, using the "For Lubricating Oil" procedure, with test conditions of 100°C ± 1°C for 3 hours ± 5 minutes.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DLA Aviation, VEB, 6090 Strathmore Rd, Richmond, VA 23237 or e-mailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:01Z
Check the source to verify that this is the current version before use.

3.5 Corrosion of steel. The slideway lubricating oil shall pass when tested in accordance with ASTM D665, Procedure A.

3.6 Ratio of coefficients of friction. The slideway lubricating oil shall have a maximum ratio of coefficients of friction, static to kinetic, (slick-stick ratio) of 0.80. Verification shall be performed through certification (such as a notarized statement) by the lubricant supplier that the lubricant has been qualified by a machine tool manufacturer normally engaged in the qualification of slideway lubricants. The statement shall contain the name of the machine tool manufacturer, the trade name of the qualified slideway lubricant, and the date on which the qualification tests were performed.

4. REGULATORY REQUIREMENTS.

4.1 Safety data sheet (SDS). Manufacturers shall prepare and submit a SDS in accordance with FED-STD-313, "Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities", and meeting the requirements of 29 Code of Federal Regulations § 1910.1200, "Occupational Safety and Health Standards: Hazard Communication".

4.2 Marking, packaging, and labeling. The product shall be labeled, packed, and marked in accordance with 49 CFR parts 100 to 185.

4.3 Recovered materials. The offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraphs 23.403 and 23.404(b) of the Federal Acquisition Regulation FAR, as applicable.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product Conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Market Acceptability. The following market acceptability criteria are necessary to document the quality of the product to be provided under this CID.

5.2.1 The company must have produced slideway lubricating oils, meeting the requirements of this CID, for at least 5 years.

5.2.2 The company must be able to show test data or lab results of meeting the salient characteristics of the slideway lubricating oils.


5.2.3 The company must provide a warranty of replacing defective items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:01Z
Check the source to verify that this is the current version before use.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Part Identification Number (PIN). The following part identification number procedure is for government purposes and does not constitute a requirement for the contractor.

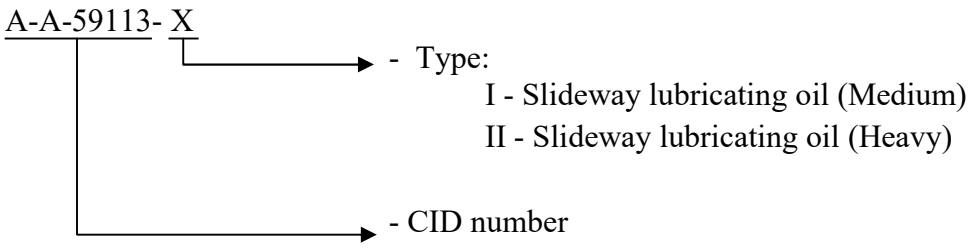

7.2 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this document.
b. Part identification number
c. Quantity and size of containers required.
d. Packaging requirements.

7.3 National Stock Numbers (NSNs). The following is a list of NSNs assigned which correspond to this CID. This list may not be indicative of all possible NSNs associated with this document.

NSN	Grade	Unit of issue
9150-00-145-0112	I	5 Gallon can
9150-00-402-4479	I	55 Gallon drum
9150-00-402-4480	II	55 Gallon drum

7.4 Source of documents.

7.4.1 Electronic copies of CFR documents may be obtained from https://www.ecfr.gov.

7.4.2 Electronic copies of FAR documents may be obtained from https://www.acquisition.gov/browse/index/far.

7.4.3 Electronic copies of ASTM documents may be obtained from https://www.astm.org.

7.5 Shelf-life. This specification covers items where the assignment of a Federal shelf-life code is a consideration. Specific shelf-life requirements should be specified in the contract or purchase order, and should include, as a minimum, shelf-life code, shelf-life package markings in accordance with MIL-STD-129 or FED-STD-123, preparation of a materiel quality storage standard for type II (extendible) shelf-life items, and a minimum of 85 percent shelf-life

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:01Z
Check the source to verify that this is the current version before use.

remaining at time of receipt by the Government. These and other requirements, if necessary, are in DoDM 4140.27 Volumes 1 and 2. The shelf-life codes are in the Federal Logistics Information System Total Item Record. Additive information for shelf-life management may be obtained from DoDM 4140.27 Volumes 1 and 2, or the designated shelf-life Points of Contact (POC). The POC should be contacted in the following order: (1) the Inventory Control Points that manage the item and (2) the DoD Service and Agency administrators for the DoD Shelf-Life Program. Appropriate POCs for the DoD Shelf-Life Program can be contacted through the DoD Shelf-Life Management website: https://www.shelflife.dla.mil/.

7.6 Changes from previous issues. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

MILITARY INTERESTS:

Custodians:
Army – AR
Air Force – 68
DLA – GS

Reviewer:
Army – AT

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FAS

Preparing Activity:
DLA – GS3

(Project 9150-2024-009)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:01Z
Check the source to verify that this is the current version before use.