
MILITARY SPECIFICATION SHEET

# CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING; AND ACCESSORIES: RECEPTACLE FLANGE MOUNT, CRIMP-TYPE CONTACTS, CLASS A, F AND E (SERIES 2)

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-81511

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

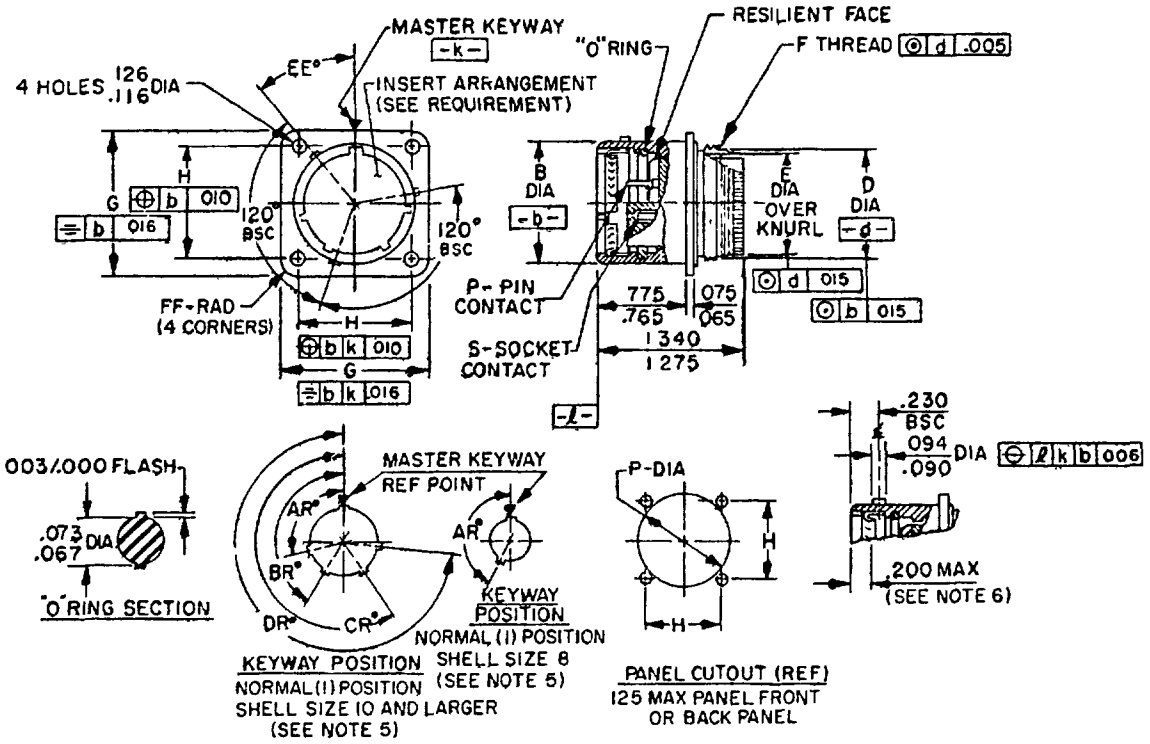


| INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|
| .003 | .08 | .067 | 1.70 | .126 | 3.20 |
| .005 | .13 | .073 | 1.85 | .200 | 5.08 |
| .006 | .15 | .075 | 1.91 | .230 | 5.84 |
| .010 | .25 | .090 | 2.29 | .765 | 19.43 |
| .015 | .38 | .094 | 2.39 | .775 | 19.69 |
| .016 | .41 | .116 | 2.95 | 1.275 | 32.39 |
| .065 | 1.65 | .125 | 3.18 | 1.340 | 34.04 |



FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

TABLE I.

| Shell size | B dia | D dia | E dia | F thread | G | H | P dia | AR° BSC | BR° BSC | CR° BSC | DR° BSC | FF Rad | EE° BSC Position 1 | 2 | 3 | 4 | 5 | 6 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 8 | .553 (14.05) .547 (13.89) | .430 (10.92) .424 (10.77) | .422 (10.72) .407 (10.34) | ½-28UNEF-2A | .820 (20.83) .804 (20.42) | .599 (15.21) .589 (14.96) | .640 (16.26) .630 (16.00) | 128° | — | — | — | .120 (3.05) .100 (2.54) | 40 | 40 | 40 | 40 | 40 | 40 |
| 10 | .678 (17.22) .672 (17.07) | .555 (14.10) .549 (13 94) | .548 (13.92) .533 (13 54) | 5/8-28UN-2A | .945 (24.00) .929 (23.60) | .724 (18.39) .714 (18.14) | .765 (19.43) .755 (19.18) | 105° | 140° | 215° | 265° | .120 (3.05) .100 (2.54) | 60 | 46 | 46 | 60 | 89 | 60 |
| 14 | .928 (23.57) .922 (23.42) | .805 (20.45) .799 (20.29) | .798 (20.27) .783 (19 89) | 7/8-28UN-2A | 1.133 (28.78) 1.117 (28.37) | .911 (23.14) .901 (22.89) | 1.015 (25.78) 1.005 (25.53) | 105° | 140° | 215° | 265° | .120 (3.05) .100 (2.54) | 60 | 46 | 46 | 60 | 89 | 60 |
| 16 | 1.054 (26.77) 1.048 (26.62) | .930 (23.62) .924 (23.47) | .924 (23.47) .909 (23.09) | 1-28UN-2A | 1.258 (31.95) 1.247 (31.55) | .974 (24.74) .964 (24.49) | 1.140 (28.96) 1.130 (28.70) | 105° | 140° | 215° | 265° | .150 (3.81) .130 (3.30) | 50 | 50 | 50 | 50 | 50 | 50 |
| 18 | 1.178 (29.92) 1.172 (29.77) | 1.055 (26.80) 1.049 (26.64) | 1.048 (26.62) 1.033 (26 24) | 1-1/8-28UN-2A | 1.351 (34.32) 1.335 (33.91) | 1.067 (27.10) 1.057 (26.85) | 1.265 (32.13) 1.255 (31.88) | 105° | 140° | 215° | 265° | .150 (3.81) .130 (3.30) | 50 | 50 | 50 | 50 | 50 | 50 |

NOTES
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm
4. Dimensions are after plating.
5. Normal mating keyway position shown. For alternate keyway positions see MIL-C-81511, figure 4.
6. Distance from front of shell to the point at which a gage pin, having the same basic diameter as plug shell, engages the spring member
7 For shell sizes 20, 22 and 24 use MIL-C-81511/21 connectors



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure and table I

Series 2

Classes A, F and E

Shell size See table II

Insert arrangement See supplement for MS sheet corresponding to desired shell size.

Contacts: Style P or S, crimp type.

Shell polarization 1 thru 6 key position

Weight See table II

Marking Part number on shell

Mating counterpart Plug connectors specified in MIL-C-81511/6 and '34

Insertion and removal tool. As specified in MS3323 MS3342 and MS3344

Part number: The part number shall consist of M81511/01 together with the applicable codes for class, shell size, insert arrangement, contact style, and key positions. Information concerning the formulation of the part number can be found in MIL-C-81511

TABLE II

| Shell size | Weight (REF) 1/ (pounds) |
|---|---|
| 18 (code F) | 071 |
| 16 (code E) | .064 |
| 14 (code D) | .050 |
| 10 (code B) | 030 |
| 8 (code A) | 023 |

1/ Removable crimp contacts not included in weight
(See contact drawings for weight of pin and socket contact )

Custodians
Army - EL
Navy - AS
Air Force - 17

Review activities
Army - MI, MU, AV, WC
Navy - SH, EC, OS
Air Force - 11, 80
DSA - ES

User activities:
Army - ME, AT
Navy - MC
Air Force -

Preparing activity
Navy - AS

(Project No. 5935-1732-1)



Source: https://assist.dla.mil -- Downloaded: 202640-23T05:33Z
Check the source to verify that this is the currentversion before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS. This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-C-81511/1E - CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING; AND ACCESSORIES: RECEPTACLE, FLANGE MOUNT, CRIMP-TYPE CONTACTS, CLASS A, F AND E (SERIES 2)

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:33Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

Weapons Engineering Standardization Office (Code X)
Naval Air Engineering Center
Philadelphia, Pennsylvania 19112

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-23T05:33Z
Check the source to verify that this is the current version before use.