
MIL-C-81511/20D
30 October 1970
SUPERSEDING
MIL-C-81511/20C
5 June 1970

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING; AND ACCESSORIES: NUT, SLOTTED, HEXAGON, CONNECTOR MOUNTING, FOR SERIES 1 AND 2 CONNECTORS

The complete requirements for procuring the nut described herein shall consist of this document and the latest issue of Specification MIL-C-81511.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

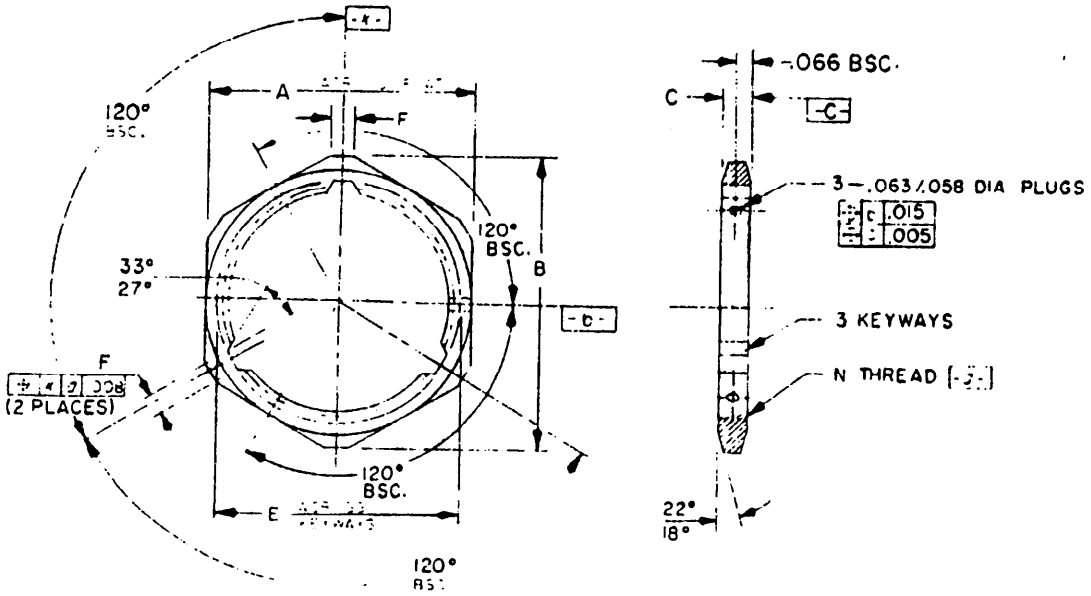

INCHES	MM
.005	.13
.008	.20
.015	.38
.058	1.47
.063	1.60
.066	1.68

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.

Part number	Temp. rating (°C)	Shell size (REF)	A across flats	B	C	E	F	N thread	Weight (pounds) (REF)
M81511/20-08-1	150	8	.882 (22.40)	.977 (24.82)	.140 (3.56)	.662 (16.81)	.122 (3.10)	5/8-20UN-2B	.0038
M81511/20-08-2	175-200		.870 (22.10)	.960 (24.38)	.125 (3.18)	.650 (16.51)	.110 (2.79)		
M81511/20-10-1	150	10	.944 (23.98)	1.084 (27.53)	.140 (3.56)	.783 (19.89)	.132 (3.35)	3/4-20UNEF-2B	.0044
M81511/20-10-2	175-200		.932 (23.67)	1.067 (27.10)	.125 (3.18)	.771 (19.58)	.120 (3.05)		
M81511/20-14-1	150	14	1.194 (30.33)	1.373 (34.87)	.140 (3.56)	1.033 (26.24)	.132 (3.35)	1 1/4-20UNEF-2B	.0057
M81511/20-14-2	175-200		1.182 (30.02)	1.356 (34.44)	.125 (3.18)	1.021 (25.93)	.120 (3.05)		
M81511/20-16-1	150	16	1.319 (33.50)	1.517 (38.53)	.140 (3.56)	1.159 (29.44)	.132 (3.35)	1 1/4-18-20UN-2B	.0071
M81511/20-16-2	175-200		1.307 (33.20)	1.500 (38.10)	.125 (3.18)	1.147 (29.13)	.120 (3.05)		
M81511/20-18-1	150	18	1.444 (36.68)	1.662 (42.21)	.140 (3.56)	1.283 (32.59)	.132 (3.35)	1 1/4-20UN-2B	.0079
M81511/20-18-2	175-200		1.432 (36.37)	1.645 (41.78)	.125 (3.18)	1.271 (32.28)	.120 (3.05)		
M81511/20-20-1	150	20	1.632 (41.45)	1.772 (45.01)	.140 (3.56)	1.407 (35.74)	.132 (3.35)	1 3/8-20UN-2B	.0091
M81511/20-20-2	175-200		1.620 (41.15)	1.755 (44.58)	.125 (3.18)	1.395 (35.43)	.120 (3.05)		
M81511/20-22-1	150	22	1.694 (43.03)	1.950 (49.53)	.140 (3.56)	1.532 (38.91)	.132 (3.35)	1 1/2-20UN-2B	.0102
M81511/20-22-2	175-200		1.682 (42.72)	1.933 (49.10)	.125 (3.18)	1.520 (38.66)	.120 (3.05)		
M81511/20-24-1	150	24	1.882 (47.80)	2.086 (52.98)	.140 (3.56)	1.657 (42.09)	.132 (3.35)	1 5/8-20UN-2B	.0123
M81511/20-24-2	175-200		1.870 (47.50)	2.065 (52.45)	.125 (3.18)	1.645 (41.78)	.120 (3.05)		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Dimensions apply after plating.
5. This nut is used with MIL-C-81511-3, 4, '23 24, '27, '28, '32 and '37 receptacles.

REQUIREMENTS:

Material: Nut, Aluminum; Plugs, Polytetrafluoroethylene

Finish: 150° C Cadmium plate over nickel, olive drab in color
175 - 200° C Dull chromium plate over nickel

Custodians:
Army - EL
Navy - AS
Air Force - 17

Review activities:
Army - MI, MU, AV, WC
Navy - SH, EC, OS
Air Force - 11, 80
DSA - ES

User activities:
Army - ME, AT
Navy - MC
Air Force -

Preparing activity:
Navy - AS

(Project No. 5935-1732-14)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.