
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING; AND ACCESSORIES: RECEPTACLE, CABLE CONNECTING, CRIMP-TYPE CONTACTS, CLASS A, F AND E (SERIES 1)

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-81511.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

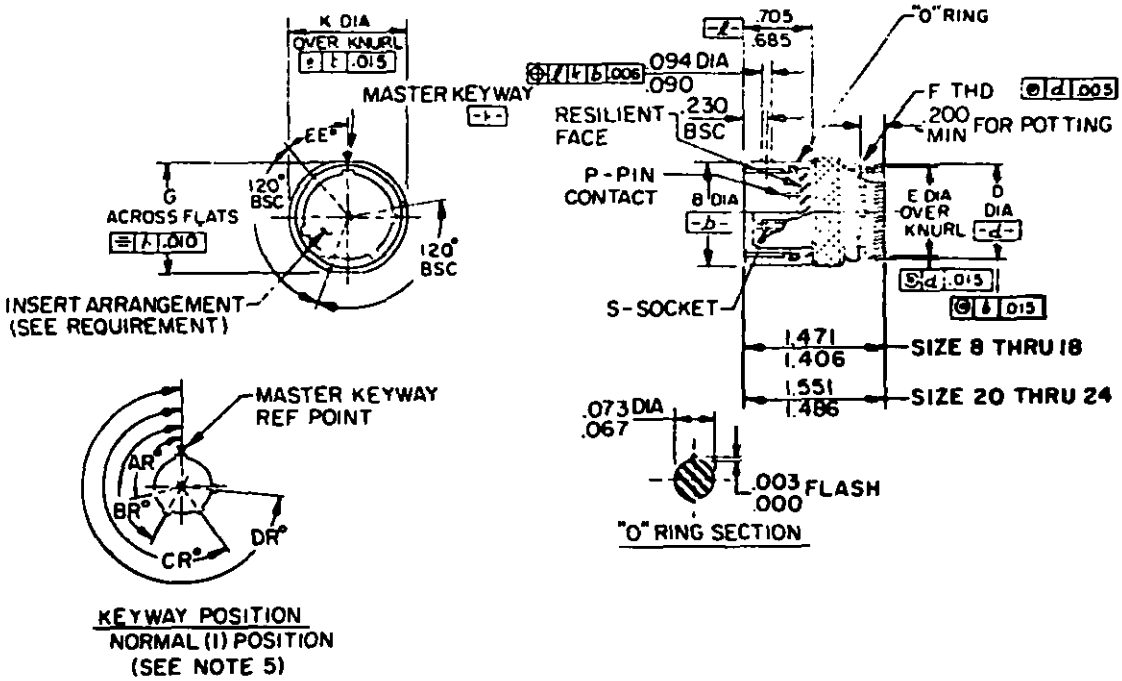

INCHES	MM	INCHES	MM
.003	.08	.200	5.08
.005	.13	.230	5.84
.006	.15	.685	17.40
.010	.25	.705	17.91
.015	.38	1.406	35.71
.067	1.70	1.436	36.47
.073	1.85	1.471	37.36
.090	2.29	1.531	38.89
.094	2.39		

★U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/6695

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.

Shell size	B dia	D dia	E dia	F thread	G across flats	K dia	AR BSC	BR BSC	CR BSC	DR BSC	EE BSC Position 1	2	3	4	5	6
8	.553 (14.05) .547 (13.89)	.430 (10.92) .424 (10.77)	.422 (10.72) .407 (10.34)	½-28UNEF-2A	.565 (14.35) .553 (14.05)	.780 (19.81) .760 (19.30)	105	140	215	265	60	46	43	60	69	43
10	.678 (17.22) .672 (17.07)	.555 (14.10) .549 (13.94)	.548 (13.92) .533 (13.54)	5/8-28UN-2A	.690 (17.53) .678 (17.22)	.900 (22.86) .880 (22.35)	95	141	208	236	53	87	51	77	87	87
14	.928 (23.57) .922 (23.42)	.805 (20.45) .799 (20.29)	.798 (20.27) .783 (19.89)	7/8-28UN-2A	.940 (23.88) .928 (23.57)	1.150 (29.21) 1.130 (28.70)	95	141	208	236	53	87	51	77	87	87
16	1.054 (26.77) 1.048 (26.62)	.930 (23.62) .924 (23.47)	.924 (23.47) .909 (23.09)	1-28UN-2A	1.066 (27.08) 1.054 (26.77)	1.280 (32.51) 1.260 (32.00)	80	142	196	293	98	98	98	98	98	98
18	1.178 (29.92) 1.172 (29.77)	1.055 (26.80) 1.049 (26.64)	1.048 (26.62) 1.033 (26.24)	1-1/8-28UN-2A	1.190 (30.23) 1.178 (29.92)	1.400 (35.56) 1.380 (35.05)	80	142	196	293	98	98	98	98	98	98
20	1.303 (33.10) 1.297 (32.94)	1.180 (29.97) 1.174 (29.82)	1.173 (29.79) 1.158 (29.41)	1 ¼-28UN-2A	1.315 (33.40) 1.305 (33.15)	1.525 (38.74) 1.505 (38.23)	80	142	196	293	98	98	98	98	98	98
22	1.428 (36.27) 1.422 (36.12)	1.305 (33.15) 1.299 (32.99)	1.298 (32.97) 1.283 (32.59)	1 3/8-28UN-2A	1.440 (36.58) 1.430 (36.32)	1.650 (41.91) 1.630 (41.40)	80	142	196	293	98	98	98	98	98	98
24	1.553 (39.45) 1.547 (39.29)	1.430 (36.32) 1.424 (36.17)	1.423 (36.14) 1.408 (35.76)	1½-28UN-2A	1.565 (39.75) 1.555 (39.50)	1.775 (45.09) 1.755 (44.58)	80	142	196	293	98	98	98	98	98	98

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch 25.4 mm.
4. Dimensions are after plating.
5. Normal mating keyway position shown. For alternate keyway positions, see MIL-C-81511, figure 8.

Source: https://assist.dla.mil -- Downloaded: 202610-23T05:34Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:

Dimensions and configuration: See figure and table I.

Series: 1

Classes: A, F, and E.

Shell size: See table II.

Insert arrangement: See supplement for MS sheet corresponding to desired shell size.

Contacts: Style P or S, crimp type.

Shell polarization: 1 thru 6, key position.

Weight: See table II.

Marking: Part number on shell.

Mating counterpart: Plug connectors specified in MIL-C-81511 26 and 38.

Insertion and removal tool: As specified in MS3323, MS3342, and MS3344.

Part number: The part number shall consist of M81511 25 together with the applicable codes for class, shell size, insert arrangement, contact style, and key positions. Information concerning the formulation of the part number can be found in MIL-C-81511.

TABLE II.

Shell size	Weight (REF) 1/ (pounds)
24 (code J)	.128
22 (code H)	.115
20 (code G)	.098
18 (code F)	.083
16 (code E)	.066
14 (code D)	.058
10 (code B)	.036
8 (code A)	.028

1/ Removable crimp contacts not included in weight.
(See contact drawings for weight of pin and socket contact.)

Custodians:
Army - EL
Navy - AS
Air Force - 17

Review activities:
Army - MI, MU, AV, WC
Navy - SH, EC, OS
Air Force - 11, 80
DSA - ES

User activities:
Army - ME, AT
Navy - MC
Air Force -

Preparing activity:
Navy - AS

(Project No. 5935-1732-19)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.