
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING: AND ACCESSORIES: PLUG, CRIMP-TYPE CONTACTS, CLASS A, F AND E (SERIES 1)

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification MIL-C-81511.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

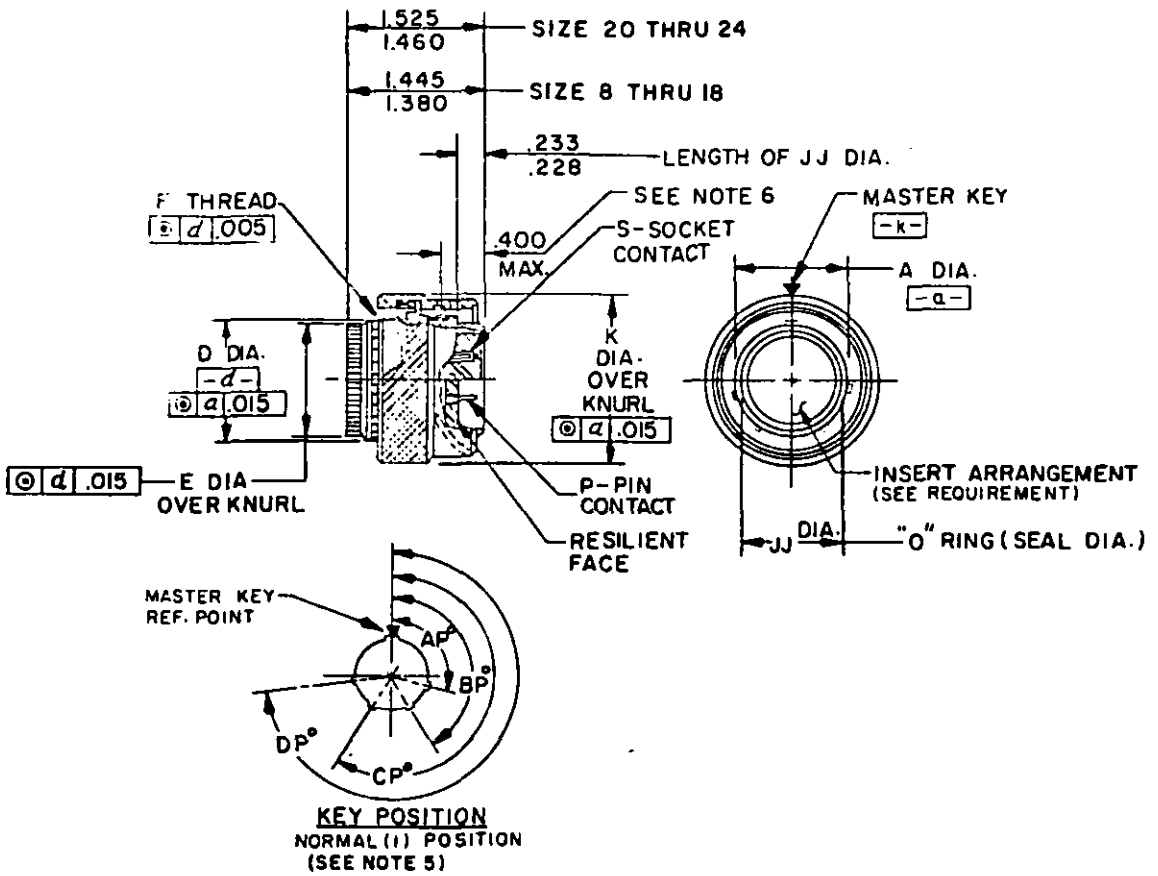

KEY POSITION
NORMAL (1) POSITION
(SEE NOTE 5)

INCHES	MM	INCHES	MM
.005	.13	1.380	35.05
.015	.38	1.445	36.70
.228	5.79	1.460	37.08
.233	5.92	1.525	38.74
.400	10.16		

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.

TABLE I.

Shell size	A dia	D dia	E dia	F thread	K dia	AP° BSC	BP BSC	CP° BSC	DP° BSC	JJ dia
8	.4015 (10.20) .3955 (10.05)	.430 (10.92) .424 (10.77)	.422 (10.72) .407 (10.34)	½-28UNEF-2A	.850 (21.59) .830 (21.08)	105°	140°	215°	265°	.382 (9.70) .373 (9.47)
10	.5265 (13.37) .5205 (13.22)	.555 (14.10) .549 (13.94)	.548 (13.92) .533 (13.54)	5/8-28UN-2A	.975 (24.77) .955 (24.26)	95°	141°	208°	236°	.507 (12.88) .498 (12.65)
14	.7765 (19.72) .7705 (19.57)	.805 (20.45) .799 (20.29)	.798 (20.27) .783 (19.89)	7/8-28UN-2A	1.225 (31.12) 1.205 (30.61)	95	141	208	236	.757 (19.23) .746 (18.95)
16	.9025 (22.92) .8965 (22.77)	.930 (23.62) .924 (23.47)	.924 (23.47) .909 (23.03)	1-28UN-2A	1.350 (34.29) 1.330 (33.78)	80	142	196	293	.883 (22.43) .872 (22.15)
18	1.0265 (26.07) 1.0205 (25.92)	1.055 (26.80) 1.049 (26.64)	1.048 (26.62) 1.033 (26.24)	1-1/8-28UN-2A	1.475 (37.47) 1.455 (36.96)	80	142	196	293	1.007 (25.58) .996 (25.30)
20	1.1515 (29.25) 1.1455 (29.10)	1.180 (29.97) 1.174 (29.82)	1.173 (29.79) 1.158 (29.41)	1 1/4-28UN-2A	1.624 (41.25) 1.604 (40.74)	80	142	196	293	1.132 (28.75) 1.121 (28.47)
22	1.2765 (32.42) 1.2705 (32.27)	1.305 (33.15) 1.299 (32.99)	1.298 (32.97) 1.283 (32.59)	1 3/8-28UN-2A	1.749 (44.42) 1.729 (43.92)	80	142	196	293	1.257 (31.93) 1.246 (31.65)
24	1.4015 (35.60) 1.3955 (35.45)	1.430 (36.32) 1.424 (36.17)	1.423 (36.14) 1.408 (35.76)	1 ½-28UN-2A	1.874 (47.60) 1.854 (47.09)	80	142	196	293	1.382 (35.10) 1.371 (34.82)

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Dimensions are after plating.
5. Normal key positions are shown. For alternate key positions, see MIL-C-81511, figure 8
6. Distance from front of shell to the point at which a gage ring, having the same basic diameter as receptacle shell, engages the spring member.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure and table I.

Series: 1

Classes: A, F, and E.

Shell size: See table II.

Insert arrangement: See supplement for MS sheet corresponding to desired shell size.

Contacts: Style P or S, crimp type.

Shell polarization: 1 thru 6, key position.

Weight: See table II.

Marking: Part number on shell or coupling ring.

Mating counterpart: Items specified in MIL-C-81511'21, /22, '23, /24, /25, /27, '30, /31, /32, and /33.

Insertion and removal tool: As specified in MS3323, MS3342, and MS3344.

Part number: The part number shall consist of M81511/26 together with the applicable codes for class, shell size, insert arrangement, contact style, and key positions. Information concerning the formulation of the part number can be found in MIL-C-81511.

TABLE II.

Shell size	Weight (REF) 1/ (pounds)
24 (code J)	.140
22 (code H)	.122
20 (code G)	.108
18 (code F)	.089
16 (code E)	.071
14 (code D)	.062
10 (code B)	.040
8 (code A)	.031

1/ Removable crimp contacts not included in weight.
(See contact drawings for weight of pin and socket contact.)

Custodians:
Army - EL
Navy - AS
Air Force - 17

Preparing activity:
Navy - AS

Review activities:
Army - MI, MU, AV, WC
Navy - SH, EC, OS
Air Force - 11, 80
DSA - ES

(Project No. 5935-1732-20)

User activities:
Army - ME, AT
Navy - MC
Air Force -

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.