MIL-C-81511/46A(NAVY)
7 January 1977
SUPERSEDING
MIL-C-0081511/46(NAVY)
18 October 1971

MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT, ENVIRONMENT RESISTING: PLUG, INDIVIDUAL, RELEASE, CRIMP-TYPE CONTACTS, CLASS A, F AND W (SERIES 3)


Ⓐ

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the connectors described herein shall consist of this document and the latest issue of Specification MIL-C-81511.

THIS SPECIFICATION INACTIVE FOR NEW DESIGN AFTER 30 APRIL 1975. SEE MIL-STD-1353.

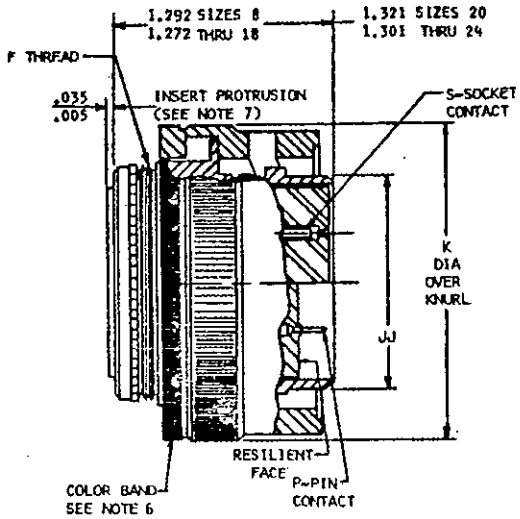

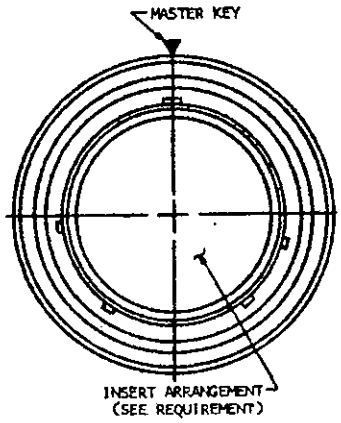

INCHES	MM	INCHES	MM
.005	.13	1.272	32.31
.015	.38	1.292	32.82
.228	5.79	1.301	33.05
.233	5.92	1.321	33.55
.400	10.16	.035	.89



KEY POSITION
NORMAL (1) POSITION
(SEE NOTE 5)

Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.

TABLE I.

SHELL SIZE	F THREAD	K DIA	AP° BSC	BP° BSC	CP° BSC	DP° BSC	JJ DIA
8	1/2-28 UNEF-2A	.850 (21.59) .830 (21.08)	105°	140°	215°	265°	.382 (9.70) .373 (9.47)
10	5/8-28 UN-2A	.975 (24.77) .955 (24.26)	95°	141°	208°	236°	.507 (12.88) .498 (12.65)
14	7/8-28 UN-2A	1.225 (31.12) 1.205 (30.61)	95°	141°	208°	236°	.757 (19.23) .746 (18.95)
16	1-28 UN-2A	1.350 (34.29) 1.330 (33.78)	80°	142°	196°	293°	.883 (22.43) .872 (22.15)
18	1 1/8-28 UN-2A	1.475 (37.47) 1.455 (36.96)	80°	142°	196°	293°	1.007 (25.58) .996 (25.30)
20	1 1/4-28 UN-2A	1.624 (41.25) 1.604 (40.74)	80°	142°	196°	293°	1.132 (28.75) 1.121 (28.47)
22	1 3/8-28 UN-2A	1.749 (44.42) 1.729 (43.92)	80°	142°	196°	293°	1.257 (31.93) 1.246 (31.65)
24	1 1/2-28 UN-2A	1.874 (47.60) 1.854 (47.09)	80°	142°	196°	293°	1.382 (35.10) 1.371 (34.82)

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. MILLIMETERS ARE IN PARENTHESES.
3. METRIC EQUIVALENTS (TO THE NEAREST .01 MM) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 MM.
4. DIMENSIONS ARE AFTER PLATING.
5. NORMAL KEY POSITIONS ARE SHOWN. FOR ALTERNATE KEY POSITIONS, SEE MIL-C-81511, FIGURE 8.
6. COLOR BAND: COLOR BLUE .150 MAX. WIDE.
7. ARRANGEMENTS CONTAINING SIZE 12 CONTACTS, INSERT PROTRUSION .070/.020.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure and table I.

Series: 3.

Ⓐ Classes: A, F and W.

Shell size: See table II.

Insert arrangement: See supplement for MS sheet corresponding to desired shell size.

Contacts: Style P or S, crimp type.

Shell polarization: 1 thru 6, key position.

Weight: See table II.

Marking: Part number on shell or coupling ring.

Mating counterpart: Items specified in MIL-C-81511/21, /22, /23, /24, /25, /27, /30, /41, /42, /43, /44, /45, /47, /48 and /49.

Insertion and removal tool: As specified in MS3160.

Part number: The part number shall consist of M81511/46 together with the applicable codes for class, shell size, insert arrangement, contact style, and key positions. Information concerning the formulation of the part number can be found in MIL-C-81511.

TABLE II. Shell size and weight.

Shell size	Weight (ref) 1/ (pounds)
24 (Code J) 22 (Code H) 20 (Code G) 18 (Code F) 16 (Code E) 14 (Code D) 10 (Code B) 8 (Code A)	To be determined

1/ Removable crimp contacts not included in weight. (See contact drawing for weight of pin and socket contact.)

Custodian:
Navy - AS

Review activities:
Navy - EC, OS, SH
DSA - ES

User activity:
Navy - MC

Preparing activity:
Navy - AS

Agent:
DSA - ES

(Project 5935-N023-3)

★ U.S. GOVERNMENT PRINTING OFFICE: 1977—703-020/1859

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:34Z
Check the source to verify that this is the current version before use.