MILITARY SPECIFICATION SHEET

ELECTRON TUBE, KLYSTRON
TYPE 6312

This amendment forms a part of Military Specification Sheet MIL-E-1/669D, dated 11 November 1974, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

PHYSICAL CHARACTERISTICS, add: "RF insulator and bushings: See figure 3".

PAGE 5

After figure 2, add the following new figure:

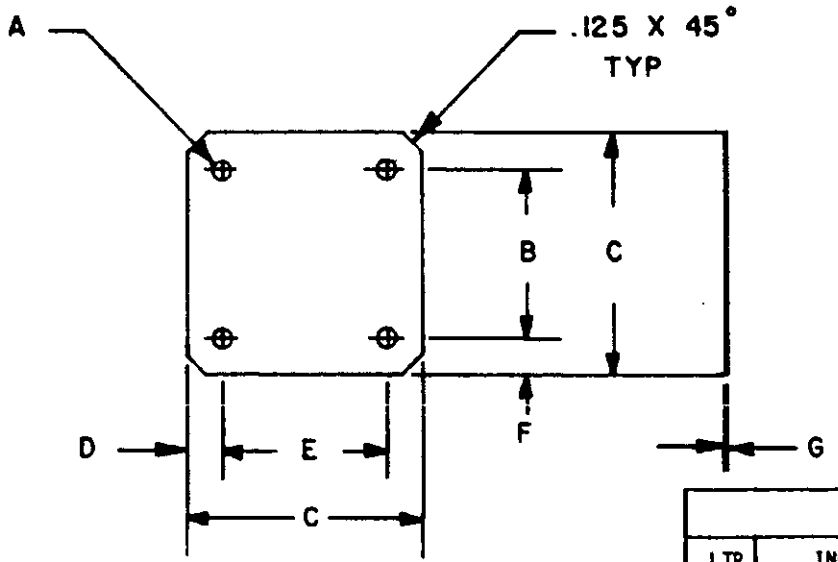

R F WINDOW INSULATOR

DIMENSIONS				
LTR	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.182	.192	4.62	4.88
B	1.203	1.234	30.56	31.34
C	1.703	1.734	43.26	44.04
D	.203	.234	5.16	5.94
E	1.266	1.297	32.16	32.94
F	.234	.266	5.94	6.76
G	.014	.016	.36	.41

NOTES:
1. The material for the insulator and bushings shall be teflon per MIL-P-19468.
2. The insulator and four bushings shall be supplied as a separate installation kit packaged with the electron tube specified herein.
3. Unless otherwise specified, all dimensions shall be checked in accordance with Quality Conformance Inspection, part 2.
4. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 3. R F window insulator and insulator bushings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:32Z
Check the source to verify that this is the current version before use.

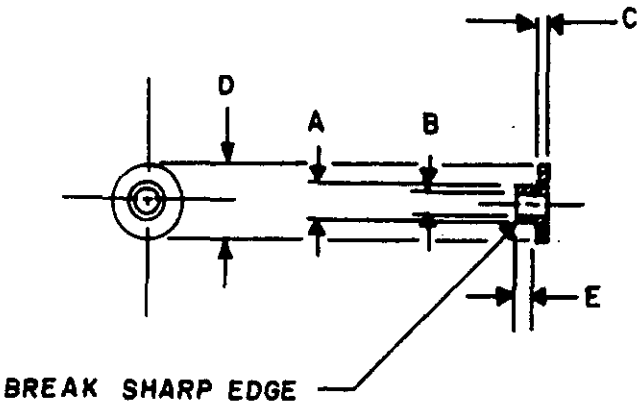

DIMENSIONS				
LTR	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.208	.212	5.28	5.38
B	.164	.168	4.17	4.27
C	.057	.067	1.45	1.70
D	.422	.453	10.72	11.51
E	.110	.120	2.79	3.05

INSULATOR BUSHING

FIGURE 3. R F window insulator and insulator bushings - Continued.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR
Navy - AS, OS, MC, CG
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5960-3284)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:32Z
Check the source to verify that this is the current version before use.