NOT MEASUREMENT SENSITIVE

MIL-B-14632/3C
12 January 1995
SUPERSEDING
MIL-B-14632/3B
14 September 1990

MILITARY SPECIFICATION

BADGE, QUALIFICATION, DISTINGUISHED MILITARY STUDENT, ROTC, ARMY AND AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-14632.

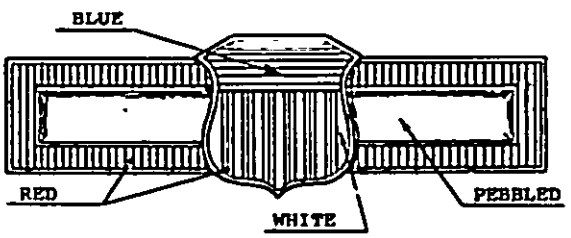

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Nickel Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 17.

DIMENSIONS:
HEIGHT (Overall): 1/2 inch (1.27 cm) (REF)
DIAMETER: 1-3/4 inches (4.45 cm) (REF)
THICKNESS (At Edge): 0.060 inch ± 0.005 inch (0.152 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-18T03:40Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled colors shall be as indicated. The colors shall conform to the TIOH chip numbers listed below or the standard sample:

COLOR	CHIP NUMBER
Red	1
Blue	20
White	28

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Attaching device shall be prong and clutch type. Prongs shall be located on the horizontal center line, equidistant from each end and 1 inch ± 1/32 inch (2.54 cm ± 0.08 cm) apart.

Custodian:
Army - IH
Air Force - 45

Review Activity:
Air Force - 32, 82, 99
DLA - CT

Preparing Activity:
Army - IH

(Project No. 8455-0793)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:40Z
Check the source to verify that this is the current version before use.