MIL-C-14633B
Amendment 2
30 September 1984
SUPERSEDING
MIL-C-14633B
INT AMENDMENT 1 (IH)
28 March 1984

MILITARY SPECIFICATION

CASES, DECORATION, PRESENTATION

This amendment forms a part of Military Specification MIL-C-14633B, dated 16 November 1981 and is approved for use by all Departments and Agencies of the Department of Defense.

Page 2

Type VIII - Delete the title in its entirety and substitute: "Type VIII - All Military Department decoration not listed which rank above the Air Medal in the order of precedence."

Add the following in the proper sequence:

"Type XVI - All Military Department decorations not listed which rank below the Meritorious Service Medal in the order of precedence."

Paragraph 2.1 - Under "STANDARDS" delete "FEDERAL, FED-STD-191 -- Textile; Test Methods" under "DRAWINGS" add the following:

"4-4-85A - Pads for Cases, Decoration, Presentation, Class 1 and Class 2
4-4-93 - Pads for Cases, Decoration, Presentation, Class 1A and Class 2A
4-4-99 - Case Decoration Molded Plastic
4-4-99A - Pads for Case Decoration Molded Plastic."

Page 3

Line 4 - Delete "and 3" and insert "3, 4, and 5.

Insert the following in the proper sequence:

"2.3 Conflict of Requirements. - In the event of a conflict between the requirements of this document and the references cited herein, the document shall govern."

Page 3

Paragraph 3.1.1 - Add the following to the paragraph "for all cases except Type XVI. A sample of the Type XVI case shall be furnished for color matching purposes only."

Page 4

Paragraph 3.3.4 - Add the following to the beginning of the first sentence: "Except for the type XVI (molded plastic) case," Add to the end of paragraph: "The hinge for the type XVI case shall be a 1-3/4 spring loaded "C" type steel hinge with a black jetalized finish."

/FSC 8455/

Source: https://assist.dla.mil -- Downloaded: 20261O-18T03:41Z
Check the source to verify that this is the current version before use.

Add the following in the proper sequence:

"Paragraph 3.3.11 - Plastic. The material for the Type XVI plastic case shall be a suitable, high impact, high heat, Polystyrene. The color shall be a dark navy blue to match pantone color #296.

Paragraph 3.4 - At the beginning of the paragraph delete "Cases" and insert the following: "Except for type XVI cases."

Page 5

Paragraph 3.4.3.1 - Delete in its entirety and substitute: "Paragraph 3.4.3.1 - Type 1, class 1 and 1A pads; Type VI class 1 and 1A pads, Type VII, class 1 and 1A pads. - Type I, class 1 and 1A pads, type VI, class 1 and class 1A pads and type VII class 1A pads shall be fabricated from 14-ply bristol board and shall conform to the details and dimensions of drawing 4-4-85A and 4-4-93, as applicable. The face and edge and minimum of 3/8 on all side of the back of the pad shall be covered with gray plush or flocking. After the applicable attachments have been securely anchored, the reverse side of the pad shall be covered with paper specified in 3.3.3. The tab attachment except for the lapel button tab shall be made of steel specified in 3.3.1. The lapel button tab attachment shall be made from steel specified in 3.3.1 or aluminum, specified in 3.3.10. Steel tabs shall be .015 inch plus or minus .002 inch thick and aluminum tabs shall be .023 ±.002 inch thick. The left tab shall be made from white satin ribbon 3/8 inch wide doubled over with the selvage along each edge.

Page 6

Paragraph 3.4.3.2 - Delete in its entirety and substitute: "3.4.3.2 All pads except type I class 1 and 1A pads; type VI class 1 and 1A pads; and type VII class 1 and 1A pads - Pads shall be fabricated in accordance with 4-4-93 and 4-4-85A as applicable. The pads shall consist of a 1/8 inch thick vinyl impregnated urethane pad overlaid with .012 gray omni flocked vinyl and laminated to a piece of .020 inch thick rigid white vinyl. The flocked overlay shall be in two pieces with both pieces heat sealed to the rigid vinyl. The lower section of the pad shall contain a pocket for each medal required. The lift tab shall be an integral part of the pad."

Add the following in the proper sequence:

3.4.4 - Type XVI case. - The type XVI case shall be molded from polystyrene specified in 3.3.11 in accordance with drawing 4-4-99. The walls for both upper and lower sections shall have a typical thickness of .070 inch. Exterior surface shall have a morocco textured finish. The top surfaces of the fillagree bar, United States of America, and the exterior of the cover shall be hot leaf stamped in silk vinyl or imitation gold. The hinge shall be covered with white satin cloth glued to the upper and lower lids 3.4.4.1. The interior lid shall be lined with .063 inch thick gray chipboard. The chipboard shall be flat in shape

Source: https://assist.dla.mil -- Downloaded: 20260-18T03:41Z
Check the source to verify that this is the current version before use.

wall of the chipboard shall be covered or wrapped with sufficient brushed, white silk vinyl or satin cloth to create a pillowy effect when the walls are positioned at a 45 degree angle and the form glued to the lid of the case. The lower lid shall be unlined.

3.4.4.2 Pads - The pad shall be fabricated as specified in drawing 4-4-99A. The pads shall consist of a 1/8 inch thick vinyl impregnated urethane pad overlaid with .012 cadet gray omni flocked vinyl and laminated to a piece of .020 inch thick rigid white vinyl. The flocked overlay shall be two pieces with both pieces heat sealed to the rigid vinyl. The lower 1-1/2 inch section shall contain a pocket to place the medal in during shipment. The lift tab is an integral part of the pad.

3.4.4.3 Marking - The manufacturer shall mold his name in the interior bottom of the case. The letters shall be raised and be clearly readable once the interior pad is lifted.

Page 7

Paragraph 4.3.1.1 - Delete the 2nd, 6th, 9th, 10th, 13th, and 14th listings and insert the following.

"Paper or chipboard	Material identification and weight, finish and thickness	3.3.3 and 3.4.4.1
Vinyl material	Material identification, thickness minus 10 degrees F cold crack resistance, grain retention	3.3.7.2 and 3.4.4.2
Polyurethane pad	Material identification and thickness	3.4 and 3.4.4.2
Striking edge	Material identification (Type I to Type XV)	3.4
Pad	Material identification and plies	3.4.2 and 3.4.4.2"

Insert the following at the end of the list.

Polystyrene	Material identification and color	3.3.11"

Paragraph 4.3.2 - Add the following after the last listing.

"Pad fabrication and heat sealing	3.4.4.2 and Drawing 4-4-85A, 4-4-93, and 4-4-99A"

Page 10

Paragraph 5.1.1 - Delete in its entirety and substitute - "5.1.1 Level A - A polyurethane pad, 3 inches square by 1 inch thick, shall be placed in each case and the case closed. A one inch wide snug-

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

fitting paper board sleeve shall be fitted over the closed case and the case shall be packaged in snug-fitting reverse tuck folding box formed from .036 inch thick, brown, kraft board with pilfer-proof lock tabs on each end."

Page 11

Add in the proper sequence.

"6.5 Type XVI cases (molded plastic case). - These cases are only authorized for use with decorations that rank below the Meritorious Service Medal, in the order of precedence."

Add the following drawings to the end of the document in the proper sequence.

"4-4-85A - Pads for Cases, Decoration, Presentation, Class 1 and Class 2
4-4-93 - Pads for Cases, Decoration, Presentation, Class 1A and Class 2A
4-4-99 - Case Decoration Molded Plastic
4-4-99A - Pads for Case Decoration Molded Plastic."

Preparing Activity:
The Institute of Heraldry,
United States Army

	CUSTODIANS:	REVIEW ACTIVITIES:	USER ACTIVITIES:
Army	IH		
Air Force	99	82	45
Navy		NU	CG
DLA		CT	

Project No. 8455 - Ø1Ø1

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-18T03:41Z
Check the source to verify that this is the current version before use.

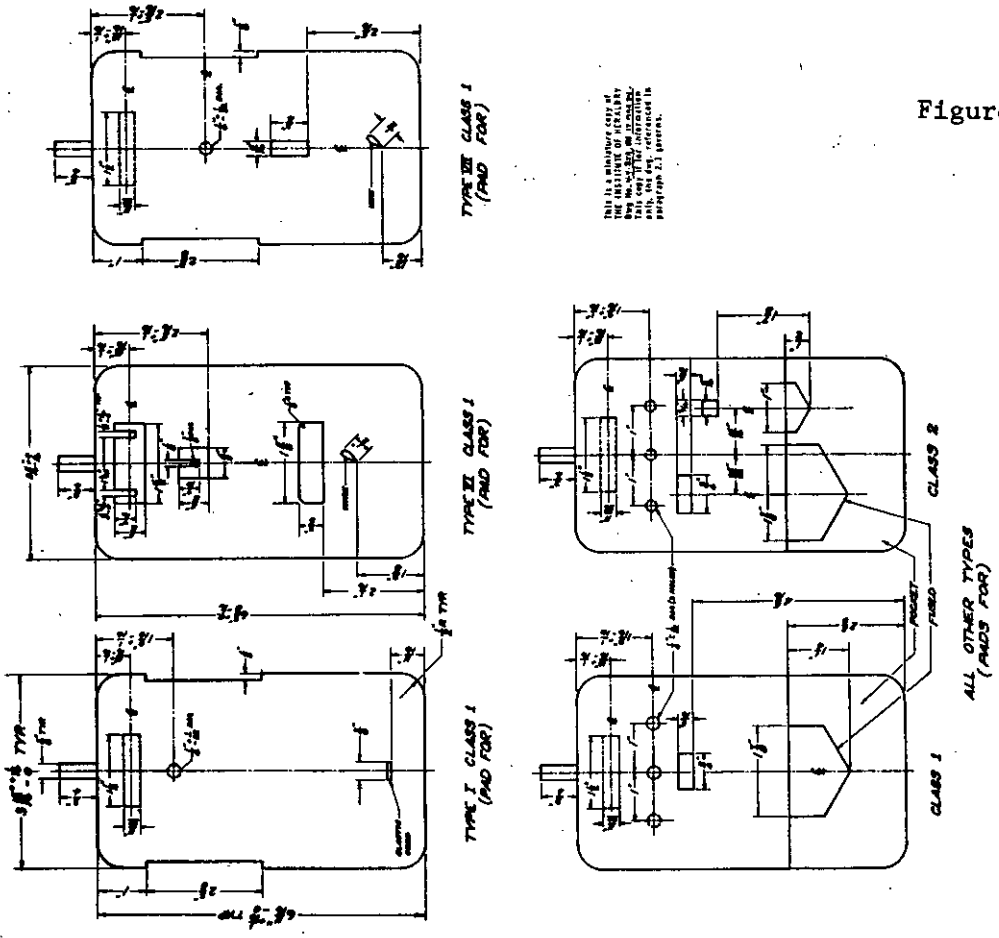


Figure 2

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:41Z
Check the source to verify that this is the current version before use.

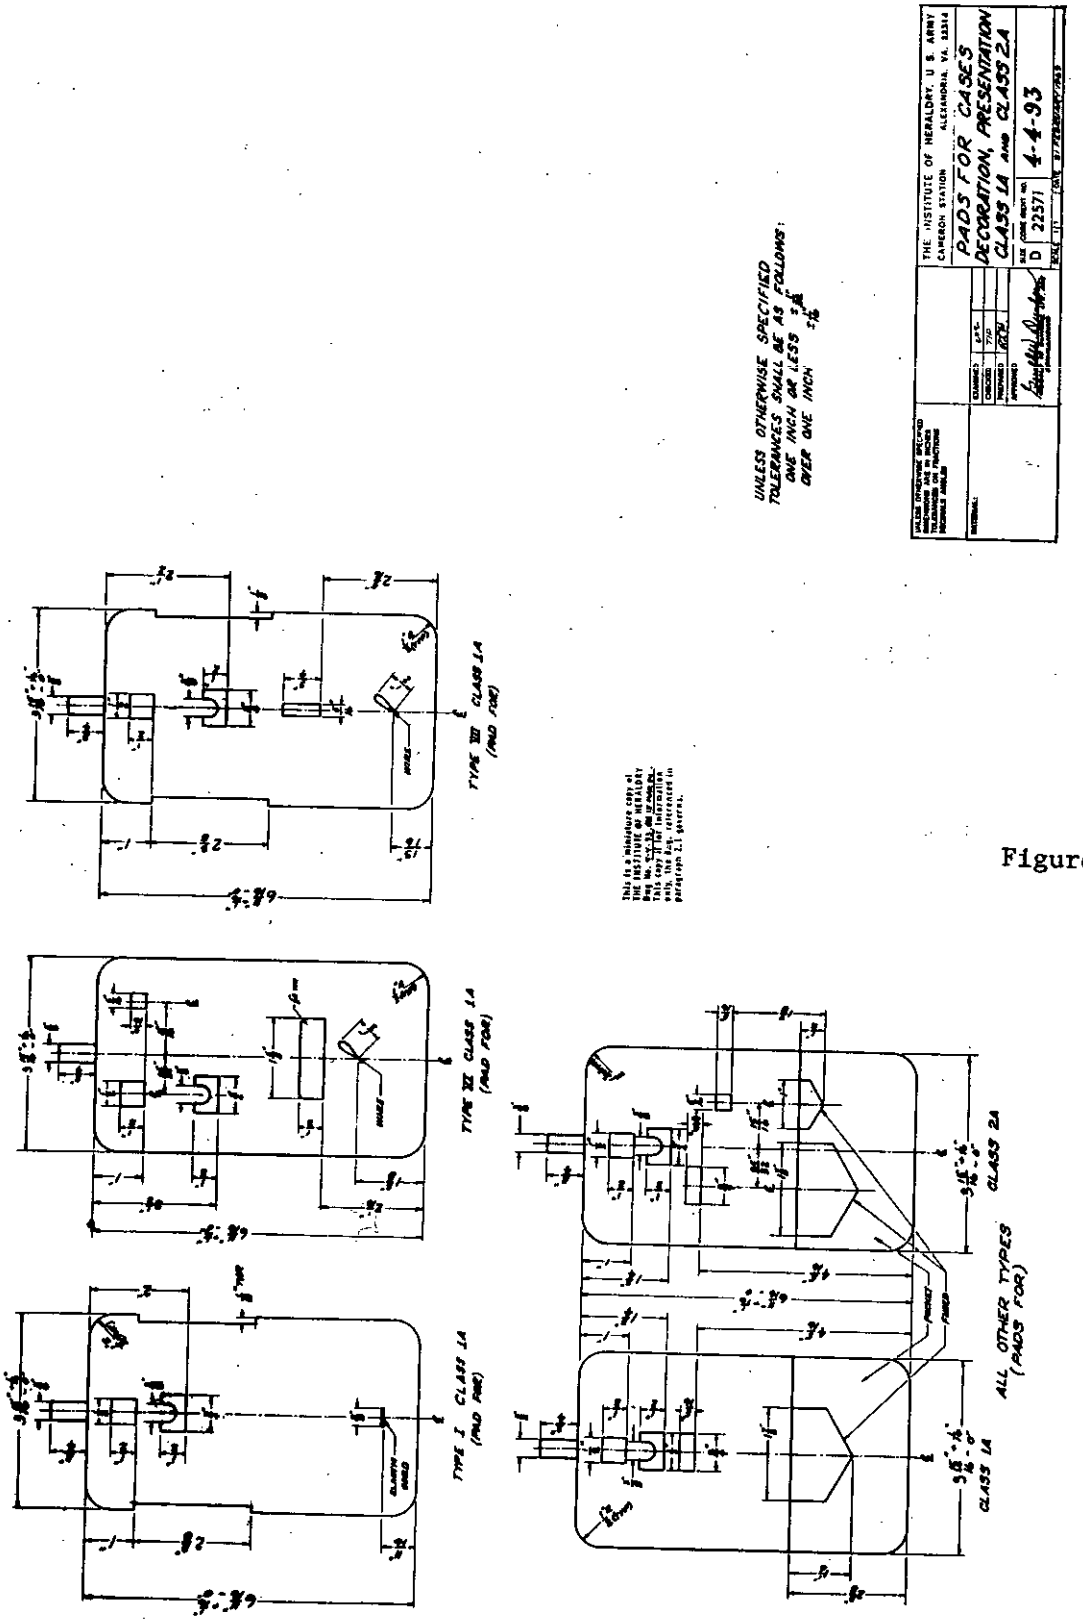


Figure 3

Source: https://assist.dla.mil -- Downloaded: 20260-18T03:41Z
Check the source to verify that this is the current version before use.


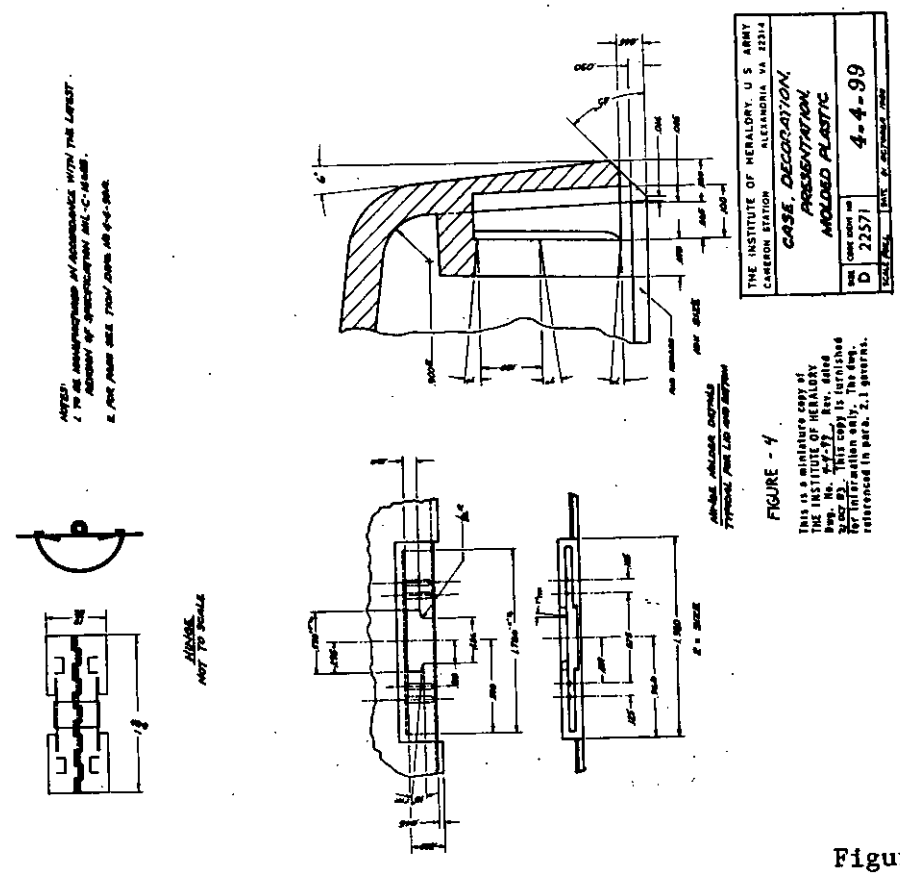


Figure 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

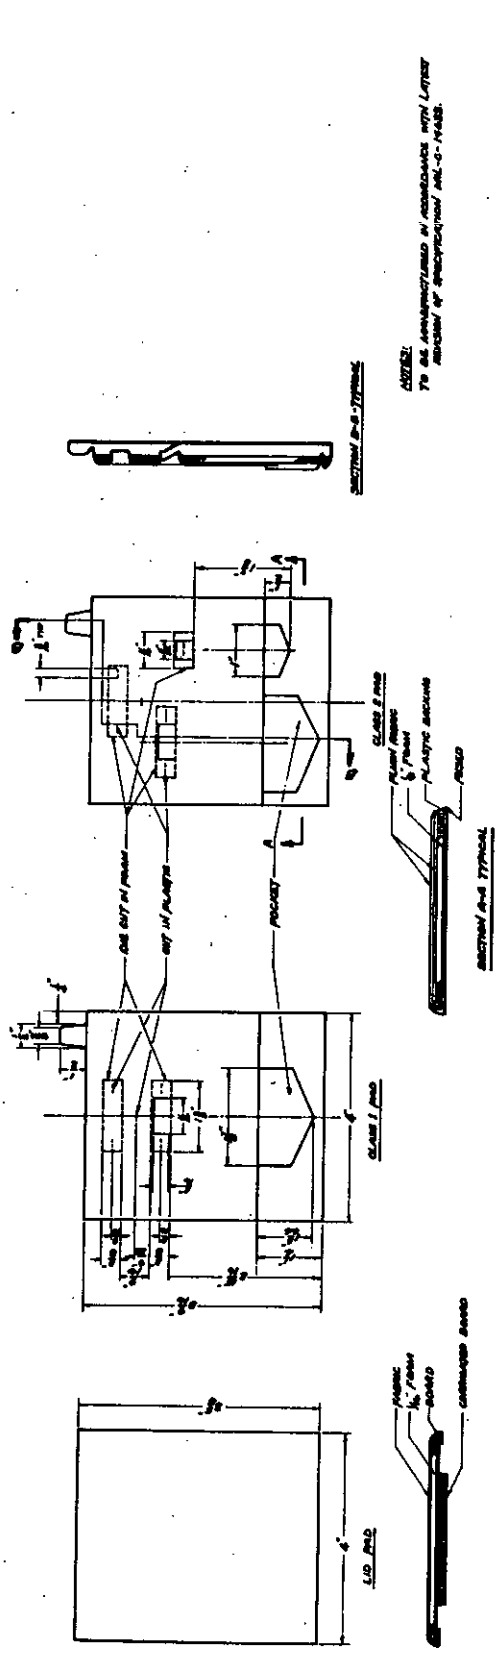

THE INSTITUTE OF HERALDRY, U.S. ARMY
CAMERON STATION ALEXANDRIA, VA. 22314

PADS FOR
CASE, DECORATION,
MOLDED PLASTIC

SIZE D | DRAWING NO. 22371 | 4-4-98A

SCALE NEAT | SHEET 1 OF 1 SHEET(S)

FIGURE -5
This is a miniature copy of THE INSTITUTE OF HERALDRY Dwg. No. 4-4-98A, Rev. dated 91 OCT 83. This copy is furnished for information only. The dwg. referenced in para. 2.1 governs.

Figure 5

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:41Z
Check the source to verify that this is the current version before use.