NOT MEASUREMENT SENSITIVE

MIL-C-14633D
21 December 1994
SUPERSEDING
MIL-C-14633C
5 February 1992

MILITARY SPECIFICATION

CASES, DECORATION, PRESENTATION

This specification is approved for use by all Departments and agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers presentation cases for decorations awarded within the Department of Defense.

1.2 Classification. Cases covered by this specification shall be of the following types and classes (see 6.4).

Type I - Medal of Honor
  Class 1 - U.S. Military Personnel
  Class 1A - U.S. Military Personnel (with extra tabs)

Type II - Distinguished Service Cross
  Class 1 - U.S. Army Personnel
  Class 1A - U.S. Army Personnel (with extra tabs)
  Class 2 - Civilian & Foreign Military Personnel
  Class 2A - Civilian & Foreign Military Personnel (with extra tabs)

Type III - Navy Cross
  Class 1 - Navy & Marine Corps Personnel
  Class 1A - Navy & Marine Corps Personnel (with extra tabs)

Type IV - Air Force Cross
  Class 1 - Air Force Personnel
  Class 1A - Air Force Personnel (with extra tabs)
  Class 2 - Civilian & Foreign Military Personnel
  Class 2A - Civilian & Foreign Military Personnel (with extra tabs)

Type V - Distinguished Service Medal
  Class 2 - U.S. Military, Civilian & Foreign Military Personnel

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in preparing this document should be addressed to: Director, The Institute of Heraldry, U.S. Army, 9325 Gunston Road, Room S112, Fort Belvoir, VA 22060-5579, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

Class 2A - U.S. Military, Civilian & Foreign Military Personnel (with extra tabs)

Type VI - Legion of Merit, Chief Commander
Class 1 - Regular
Class 1A - With extra tabs

Type VII - Legion of Merit, Commander
Class 1 - Regular
Class 1A - With extra tabs

Type VIII - All Military department decorations not listed which rank above the Air Medal in the order of precedence
Class 1 - U.S. Military Personnel
Class 1A - U.S. Military Personnel (with extra tabs)
Class 2 - Civilian & Foreign Military Personnel
Class 2A - Civilian & Foreign Military Personnel (with extra tabs)

Type IX - The Presidential Citizens Medal
Class 2 - All Personnel

Type X - Defense Distinguished Service Medal
Class 2 - All Personnel

Type XI - Congressional Space Medal of Honor
Class 2 - All Personnel

Type XII - National Intelligence Distinguished Service Medal
Class 2 - All Personnel

Type XIII - National Intelligence Medal for Achievement
Class 2 - All Personnel

Type XIV - Defense Superior Service Medal
Class 2 - All Personnel

Type XV - All Civilian Agency Decorations not listed
Class 2 - All Personnel

Type XVI - All military department decorations not listed which rank below the Meritorious Service Medal in the order of precedence

Type XVII - Award of the President of the United States for Distinguished Federal Civilian Service

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

QQ-A-250/5 - Aluminum Alloy Alclad 2024, Plate and Sheet
PPP-B-636 - Boxes, Shipping, Fiberboard
PPP-B-676 - Boxes, Set-up

STANDARDS

FEDERAL

FED-STD-595 - Colors Used in Government Procurement

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from: Department of Defense Single Stock Point, DODSSP - Customer Service, Standardization Document Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

THE INSTITUTE OF HERALDRY

4-4-85 - Cases, Decoration, Presentation, Assembly and Details
4-4-85A - Pads for Cases, Decoration, Presentation, Class 1 and Class 2
4-4-93 - Pads for Cases, Decoration, Presentation, Class 1A and Class 2A
4-4-99 - Case, Decoration, Presentation, Molded Plastic
4-4-99A - Pads for case, Decoration, Molded Plastic
4-4-100 - Case and Pad for Type XVII, Presidential Award for Distinguished Federal Civilian Service

(Copies of specifications, standards, drawings and specification sheets required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

(Figures 1, 2, 3, 4, 5 and 6 are miniature reproductions of the referenced drawings and are attached for information only.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

United States Army Color Card, The Official Colors for Branches, Agencies, etc., 1993 Edition.

(Application for copies of the color card should be addressed to the Merit Ribbon Company, 30 Davids Drive, Hauppauge, NY 11788.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM-D-3951 - Standard Practice for Commercial Packaging

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other information services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.2 and 6.5).

3.2 Material. Materials shall conform to the referenced specifications and the requirements specified herein.

3.2.1 Steel. Steel for the case shell and attachment tabs shall be any commercial grade of sheet steel suitable for this purpose.

3.2.2 Cord, elastic. When elastic cord is required for the case, the cord shall be any type commercial grade, woven elastic cord, 1/16 inch (0.16 cm) in diameter and dyed Yellow Cable No. 65002 of the United States Army Color Card.

3.2.3 Chipboard. Chipboard for lining the back of the pads and the interior top and bottom of the case shall be 120 pound white chipboard, 1/32 inch (0.08 cm) in thickness.

3.2.4 Hinge. Except for the Type XVI (molded plastic) case and Type XVII case, the hinge for the case shall be a piano type brass plates steel hinge 2-7/8 inches, plus or minus 1/8 inch (7.3 cm $\pm$ 0.32 cm) in length. The overall width of the hinge shall be 5/8 inch, plus or minus 1/64 inch (1.59 cm $\pm$ 0.04 cm). The thickness of the leaf shall be a minimum of 1/64 inch (0.04 cm). The hinge shall be fitted with two spring steel clips insuring closure of the case unless an upward force is exerted on the lid. The hinge for the Type XVI case shall be a 1-3/4 inch (4.45 cm) spring loaded "C" type steel with a black jetalized finish. The hinge for

Source: https://assist.dla.mil -- Downloaded: 202640-18T03:41Z
Check the source to verify that this is the currentversion before use.

the Type XVII case shall be a 6-1/4 inch (15.88 cm) in length by 19/32 inch (1.51 cm) high having four spring loaded "C" type steel clips with a black jetalized finish. The clips shall be spaced as shown on Drawing 4-4-100 (Figure 6).

3.2.5 Gold for plating. Gold for plating shall be 24 karat.

3.2.6 Wire for loop attachments. The wire for the loop attachments shall be any type gold plated brass wire, 0.031 inch, plus or minus 0.005 inch (0.078 cm ± 0.012 cm) in diameter. The exposed length of the loop shall be 1/2 inch ± 1/8 inch (1.27 cm ± 0.32 cm).

3.2.7 Covering. Except for the Type XVI molded plastic case, all cases shall be covered with a navy blue expanded supported smooth vinyl material.

3.2.7.1 Vinyl. The vinyl shall be 0.010 inch (0.025 cm) thick and have a minus 10 degree F. cold crack resistance.

3.2.7.2 Color. The vinyl shall be navy blue and match chip number 15044 of FED-STD-595.

3.2.8 Mylar leaf. The leaf pattern and lettering shall be accomplished with imitation gold mylar leaf.

3.2.9 Aluminum. The aluminum for the tabs shall conform to QQ-A-250/5, condition O.

3.2.10 Plastic. The plastic for the Type XVI case shall be a suitable, high impact, high heat polystyrene. The color shall be navy blue and match chip number 15044 of FED-STD-595.

3.2.11 Lacquer. The lacquer shall be a pale, clear, synthetic lacquer. The use of pigmented lacquer shall not be permitted.

3.3 Construction. Cases shall be constructed in accordance with Drawing 4-4-85, 4-4-99 or 4-4-100 as applicable. All dimensions given are finished dimensions. The cases shall consist of a lid section and a lower section. With the exception of Type XVI cases (see 3.3.4), the lid and lower section shall be made from 0.015 inch ± 0.002 inch (0.038 cm ± 0.005 cm) steel specified in 3.2.1. With the exception of Type XVI cases, the exterior surfaces and interior walls of both sections shall be covered with vinyl specified in 3.2.7. Except for the portion of the edges covered by the hinge, both sections of Type XVII cases shall have a brass striking edge. The edge may be made from any type brass or brass plated steel, have a mirror-like polished finish and be coated with lacquer specified in 3.2.11 prior to assembly. The edge shall be formed from brass 0.008 inch ± 0.002 inch (0.020 cm ± 0.005 cm) thick. The ends of the striking edge shall be butted with 1/4 inch (0.64 cm) of the ends of the hinge.

3.3.1 Lid Section.

3.3.1.1 Type I through Type XV. The top outside surface of the lid shall contain the leaf pattern, the words "UNITED STATES OF AMERICA" and, when applicable, the decoration title as shown on Drawing 4-4-85 (See Figure 1). The lettering and design shall be imprinted using mylar leaf specified in 3.2.8. Letters (type and size) and placement of the lettering and pattern shall be in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

style shown on Drawing 4-4-85 (See Figure 1) and specified herein. A polyurethane pad 3/32 inch (0.24 cm) thick shall be glued to the exterior top of the lid shell. The interior of the lid shall have a white satin covered die-cut chipboard form 7-3/16 inches (18.26 cm) in length by 4-1/2 inches (11.43 cm) in width securely glued to the metal shell. The chipboard form shall have line-cuts on the reverse side 5/16 inch (0.79 cm) from each outside edge with each corner notched with a 45 degree cut. The face and walls of the form shall be covered with sufficient satin cloth to create a pillowy effect when the walls are positioned at a 45 degree angle and the form glued to the lid of the case.

3.3.1.2 Type XVII. The top outside surface of the lid shall contain the leaf pattern and the words "AWARD OF THE PRESIDENT OF THE UNITED STATES FOR DISTINGUISHED FEDERAL CIVILIAN SERVICE" as shown on Drawing 4-4-100 (Figure 6). The lettering and pattern shall be imprinted using mylar leaf specified in 3.2.8. Letters (type and size) and placement of the lettering and pattern shall be in the style shown on Drawing 4-4-100 (Figure 6). A polyurethane pad 3/32 inch (0.24 cm) thick shall be glued to the exterior top of the lid shell. The interior of the lid shall have a satin covered die-cut chipboard form 8-5/8 inches (21.91 cm) in length by 5-13/16 inches (14.76 cm) in width securely glued to the metal shell. The chipboard form shall have line-cuts on the reverse side 5/16 inch (0.79 cm) from each outside edge with each corner notched with a 45 degree cut. The face and walls of the form shall be covered with sufficient satin cloth to create a pillowy effect when the walls are positioned at a 45 degree angle and the form glued to the lid of the case.

3.3.1.3 Lettering. Except for Type XVII cases, the words "UNITED STATES OF AMERICA" shall appear on all style cases and all letters shall be accomplished using upper case, Copper Plate, 10 Point Gothic.

3.3.1.3.1 Styles 1 and 6. No additional lettering required.

3.3.1.3.2 Styles 2, 3 and 7. Except for Type XVII cases, lettering for style 2, 3, and 7 cases shall be accomplished using Bodoni Componile type face, 36 point caps for the first letter in each word and 24 point caps for all other letters.

3.3.1.3.3 Styles 4, 5 and 8. Lettering for style 4, 5 and 8 cases shall be accomplished using Wiess Roman Bold type face, 30 point caps for the first letter in each word and 18 point caps for all other letters except the word "Chief Commander" and "Commander" on the Type VI and VII cases shall be accomplished using upper case, Copper Plate, 14 point Gothic.

3.3.1.3.4 Type XVII. Lettering shall be as shown on Drawing 4-4-100 (Figure 6).

3.3.1.4 Leaf pattern. Except for Type XVII cases, the leaf pattern shall be as shown on Drawing 4-4-85 (Figure 1).

3.3.2 Lower section. Except for the hinge, the interior walls shall be covered with a dust shield. The dust shield shall be an integral part of the molded bottom and shall be glued to the bottom as shown on drawing 4-4-85 (Figure 1). The insert shall be molded from 0.015 inch (0.292 cm) thick impact quality styrene with a white cotton flock face. The contractor shall mold his name or trademark in the lower third of the insert. The letters shall not exceed 3/8 inch (0.95 cm) in height. At the hinged end of the case, the free ends of the dust shield and the

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

hinge shall be covered with satin cloth. The satin cloth shall have the sides neatly pinked or fused to prevent raveling.

3.3.3 Pads.

3.3.3.1 Type I, Class 1 and 1A pads; Type VI, Class 1 and 1A pads; Type VII, Class 1 and 1A pads. Type I, Class 1 and 1A pads: Type VI, Class 1 and 1A pads and Type VII, Class 1 and 1A pads shall be fabricated from 14-ply bristol board and shall conform to the details and dimensions of Drawing 4-4-85A (Figure 2) and 4-4-93 (Figure 3), as applicable. The face, edge and a minimum of 3/8 inch (0.95 cm) on all sides of the back of the pad shall be covered with gray plush or flocking. After the applicable attachments have been securely anchored, the reverse side of the pad shall be covered with chipboard specified in 3.2.3. The tab attachments shall be made of steel specified in 3.2.1 or aluminum specified in 3.2.9. Steel tabs shall be 0.015 inch ± 0.002 inch (0.038 cm ± 0.007 cm) thick. Aluminum tabs shall be 0.023 inch ± 0.002 inch (0.058 cm ± 0.007 cm) thick. The lift tab shall be made from white satin ribbon, 3/8 inch (0.95 cm) wide, doubled over with the selvage along each edge.

3.3.3.2 All pads except Type I, Class 1 and 1A pads; Type VI, Class 1 and 1A pads; Type VII, Class 1 and 1A pads and Type XVII pads. Pads shall be fabricated in accordance with Drawing 4-4-85A (Figure 2) and 4-4-93 (Figure 3), as applicable. The pads shall consists of a 1/8 inch (0.32 cm) thick vinyl impregnated urethane pad overlaid with 0.012 inch (0.030 cm) gray omni flocked vinyl and laminated to a piece of 0.020 inch (0.050 cm) thick rigid white vinyl. The flocked overlay shall be in two pieces with both pieces heat sealed to the rigid vinyl. The lower section of the pad shall contain a pocket for each medal required. The lift tab shall be an integral part of the pad.

3.3.3.3 Type XVII pads. Pads shall be fabricated from 14-ply bristol board and shall conform to the details and dimensions of Drawing 4-4-100 (Figure 6). The face, edge and a minimum of 3/8 inch (0.95 cm) on all sides of the back of the pad shall be covered with white plush. After the applicable attachments have been securely anchored, the reverse side of the pad shall be covered with chipboard specified in 3.2.3.

3.3.4 Type XVI case. The Type XVI case shall be molded from polystyrene specified in 3.3.10 in accordance with Drawing 4-4-99 (Figure 4). The walls for both upper and lower sections shall have a typical thickness of 0.070 inch (0.177 cm). The exterior surface shall have a morocco textured finish. The top surfaces of the filigree bar, the words UNITED STATES OF AMERICA and the exterior of the cover shall be hot leaf stamped in silk vinyl or imitation gold. The hinge shall be covered with white satin cloth glued to the upper and lower lids.

3.3.4.1 Interior lid. The interior lid shall have a white satin cloth or brushed white silk vinyl covered die-cut chipboard form 3-5/8 inches (9.21 cm) in length by 4 inches (10.16 cm) in width securely place in the plastic shell. The chipboard form shall have line-cuts on the reverse side 7/16 inch (1.11 cm) from each outside edge with each corner notched with a 45 degree cut. The face and walls of the form shall be covered with sufficient white satin cloth or brushed white silk vinyl to create a pillowy effect when the lid is positioned at a 45 degree angle. The lower lid shall be unlined.

3.3.4.2 Pads. The pads shall be fabricated as specified in Drawing 4-4-99A (Figure 5). The pad shall consist of a 1/8 inch (0.32 cm) thick vinyl impregnated

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

urethane pad overlaid with 0.012 inch (0.030 cm) cadet gray omni flocked vinyl and laminated to a piece of 0.020 inch (0.050 cm) thick rigid white vinyl. The flocked overlay shall be two pieces with both pieces heat sealed to the rigid vinyl. The lower 1-1/2 inch (3.81 cm) section shall contain a pocket to place the medal in during shipment. The lift tab is an integral part of the pad.

3.3.4.3 Marking. The manufacturer shall mold his name in the interior bottom of the case. The letters shall be raised and be clearly readable once the interior pad is lifted.

3.4 Workmanship. Cases shall be clean, well made and shall meet the acceptable quality levels established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection as part of manufacturing operations is an acceptable practice to ascertain conformance to requirements; however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 First article inspection. When a first article is required, inspection testing shall be made on a completely finished case for all provisions of this specification applicable to the end product examination and tests (see 6.5).

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Certification of compliance. Components listed below may be accepted on the basis of a contractor's certification of compliance for the requirements specified in applicable paragraphs of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

TABLE I. CERTIFICATION OF COMPLIANCE.

Component	Characteristics	Rqm't para
Cord, elastic	Material identification, diameter and color	3.2.2
Chipboard	Material identification and weight, finish and thickness	3.2.3. and 3.3.4.1
Attachment loop wire	Material identification and karat of plating	3.2.6
Vinyl material	Material identification, thickness, minus 10 degrees F cold crack resistance, grain retention, color	3.2.7.1 and 3.2.7.2
Mylar leaf	Material identification	3.2.8
Polystyrene	Material identification and color	3.2.10
Lacquer	Material identification	3.2.11
Polyurethane pad	Material identification and thickness	3.3.1.1 and 3.3.1.2
Molded insert	Material identification, thickness and facing	3.3.2
Lift tab	Material identification	3.3.3.1
Pad	Material identification and plies	3.3.3.1 thru 3.3.3.3
Tabs	Material identification and thickness	3.3.3.1

4.3.2 Process examination. Examination shall be made during the manufacturing process for the requirements listed below to establish that no deviation is made from indicated requirements. Whenever a nonconformance is noted, correction shall be made to affected items and the process.

Requirements or operation	Rqm't para
Polyurethane pad is glued to the exterior top of the lid shell	3.4
Die-cut cardboard form securely glued to metal shell interior of the lid section	3.3.4.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

Wire loops, metal tab attachments, lift tabs and elastic cords securely anchored to reverse side of pad.	3.3.3.1
Sides and back of pad are covered with a minimum of 3/8 inch (0.95 cm) of gray plush or flocking	3.3.3.1

4.3.3 Inspection of the end item.

4.3.3.1 Visual examination of case. Examination shall be made at a distance of 16 to 22 inches (40.64 cm to 55.88 cm) under normal daylight or its equivalent. The defects found during examination shall be classified in accordance with 4.3.3.1.1 and 4.3.3.1.2. The unit of product for these examinations shall be one completely fabricated case.

TABLE II. DEFECTS.

Examine	Defect	Classification		
		Major	(*)	Minor
Exterior surface	Color and finish does not match the standard or approved sample	x	-	-
	Not covered as specified	x	-	-
	Pattern or lettering missing	x	-	-
	Not correct pattern or lettering	-	*	-
	Lettering incorrect size or position	-	*	-
	Covering not taut, i.e., any wrinkle(s), bubble(s), or crease	x	-	-
	Visible imperfection in cover, i.e., spotted or stained, cut, torn, abraded or otherwise damaged	-	*	-
	Pattern or lettering not clear or not free of voids or skips, not well defined	-	*	-
Interior surfaces	Plush, flocking or satin does not match the standard or approved sample for color, finish or texture	x	-	-
	Visible imperfection in plush, or flocking, elastic cord or satin, i.e., stained, discolored, cut, torn, frayed or otherwise damaged	-	*	-
	Elastic cord not correct color	-	-	x
	Satin cloth does not have pinked or fused sides	-	-	x
Workmanship	Hinge not as specified	x	-	-
	Lid (when closed) is not aligned with the bottom of the case	x	-	-
	Case is punctured, malformed, broken,			

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

TABLE II. DEFECTS (Continued)

Examine	Defect	Classification		
		Major	(*)	Minor
	indented or otherwise damaged	x	-	-
	Lid does not close completely over components	x	-	-
	Lid does not spring closed when released from a 30 degree angle	x	-	-
	indented or otherwise damaged	x	-	-
	Metal edge contains sharp edge, burr or is dented, bent or otherwise damaged	-	*	-
	Hinge not covered on the inside with satin cloth	x	-	-
	Lid recess for dust shield not at 45 degree angle	-	-	x
	Attachment(s), lift tab(s), wire loop(s) or cord not securely anchored	-	*	-
	Ends of striking edge not butted flush with ends of the hinge	-	-	x
	The face and walls of the interior lid does not have a pillowy effect	-	*	-
	Incorrect pad or no pad	x	-	-
	Pad not covered as specified	-	*	-
	Molded insert missing	x	-	-
	Molded insert not securely glued to shell ..	-	*	-
	One or more die-cut areas missing from pad .	x	-	-
	Die-cut area(s) not proper size or not in the proper location	-	*	-
Marking	Marking not placed as required	-	*	-
	Missing, illegible or incorrect	-	-	x

4.3.3.1.1 Examination for defects in finish, design, material, construction, workmanship and marking. Defects designated by an asterisk (*) shall be classified as major when seriously affecting appearance or serviceability and minor when affecting appearance or serviceability but not seriously.

4.3.3.1.2 Examination of cases for defects in dimensions. Any dimension that is not within the specified tolerance shall be classified as a defect.

4.3.3.1.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery, with the exception that it need not be sealed. Defects of closure listed below shall be examined on a shipping container fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT
Markings, exterior and Interior	Missing, incorrect, illegible or improper size, and location sequence or method of application.
Materials	Component missing, damaged or otherwise defective, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, inadequate stapling.
	Bulging or distortion of containers.
Content	Number in container is more or less than required.
Weight	Net weight exceeds the requirements.

5. PREPARATION FOR DELIVERY

5.1 Preservation. Preservation shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. A polyurethane pad, 3 inches (7.62 cm) square by 1 inch (2.54 cm) thick, shall be placed in each case and the case closed. A one inch (2.54 cm) wide snug-fitting paperboard sleeve shall be fitted over the closed case and the case shall be packaged in a snug-fitted set-up paperboard box conforming to Type I, Variety 1, Class A, Style 4 of PPP-B-676. Box closure shall be in accordance with the appendix of the container specification.

5.1.2 Commercial. Cases shall be preserved and packaged in accordance with the applicable requirements of ASTM-D-3951.

5.2. Packing. Packing shall be level A, B or commercial as specified (see 6.2).

5.2.1 Level A. Cases of one type only packaged as specified in 5.1 shall be packed in a snug-fitting fiberboard shipping container conforming to Class Weather Resistant, Type V3c or V3s of PPP-B-636. Closure and reinforcement shall be in accordance with the appendix of the applicable specification.

5.2.2 Level B. Cases of one type only packaged as specified in 5.1 shall be packed in a snug-fitting fiberboard shipping container conforming to Class Domestic, Grade 275 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification.

5.2.3 Commercial. Cases packaged as specified in 5.1 shall be packed in accordance with the applicable requirements of ASTM-D-3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order (see 6.2), unit packages and shipping containers shall be marked in accordance with MIL-STD-129 or ASTM-D-3951 as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Cases covered by this specification are intended to be used as presentation cases for decorations awarded by the U.S. Government.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (See 2.1) the

c. When first article is required. (See 3.1).

d. Selection of application levels of packaging and packing (See 5.1 and 5.2).

e. When special marking is required (See 5.3)

6.3 Class 1A and Class 2A Pads. The class 1A and the class 2A pads were developed to accept button back lapel buttons and service ribbons with a pin and catch type attaching device and should be specified only when components of this type are being furnished by the Government furnished property. When components are being furnished by the contractor only class 1 or class 2 pads, as applicable, shall be specified.

6.4 Type XVI cases (molded plastic case). These cases are only authorized for use with decorations that rank below the Meritorious Service Medal, in order of precedence.

6.5 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item should be a preproduction sample, a first production sample or a standard production item from the contractor's current inventory as specified in 3.1. The first article should consist of one completed item. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or tests, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.6 Subject term (key word) listing.

Decoration case
Medal case
Molded Plastic case
Presentation case

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

Pillow Effect

6.6 *Changes from previous issue.* Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - IH
Air Force - 45
Navy - NU
Coast Guard - CG

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
DLA - CT

(Project No. 8455-0777)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

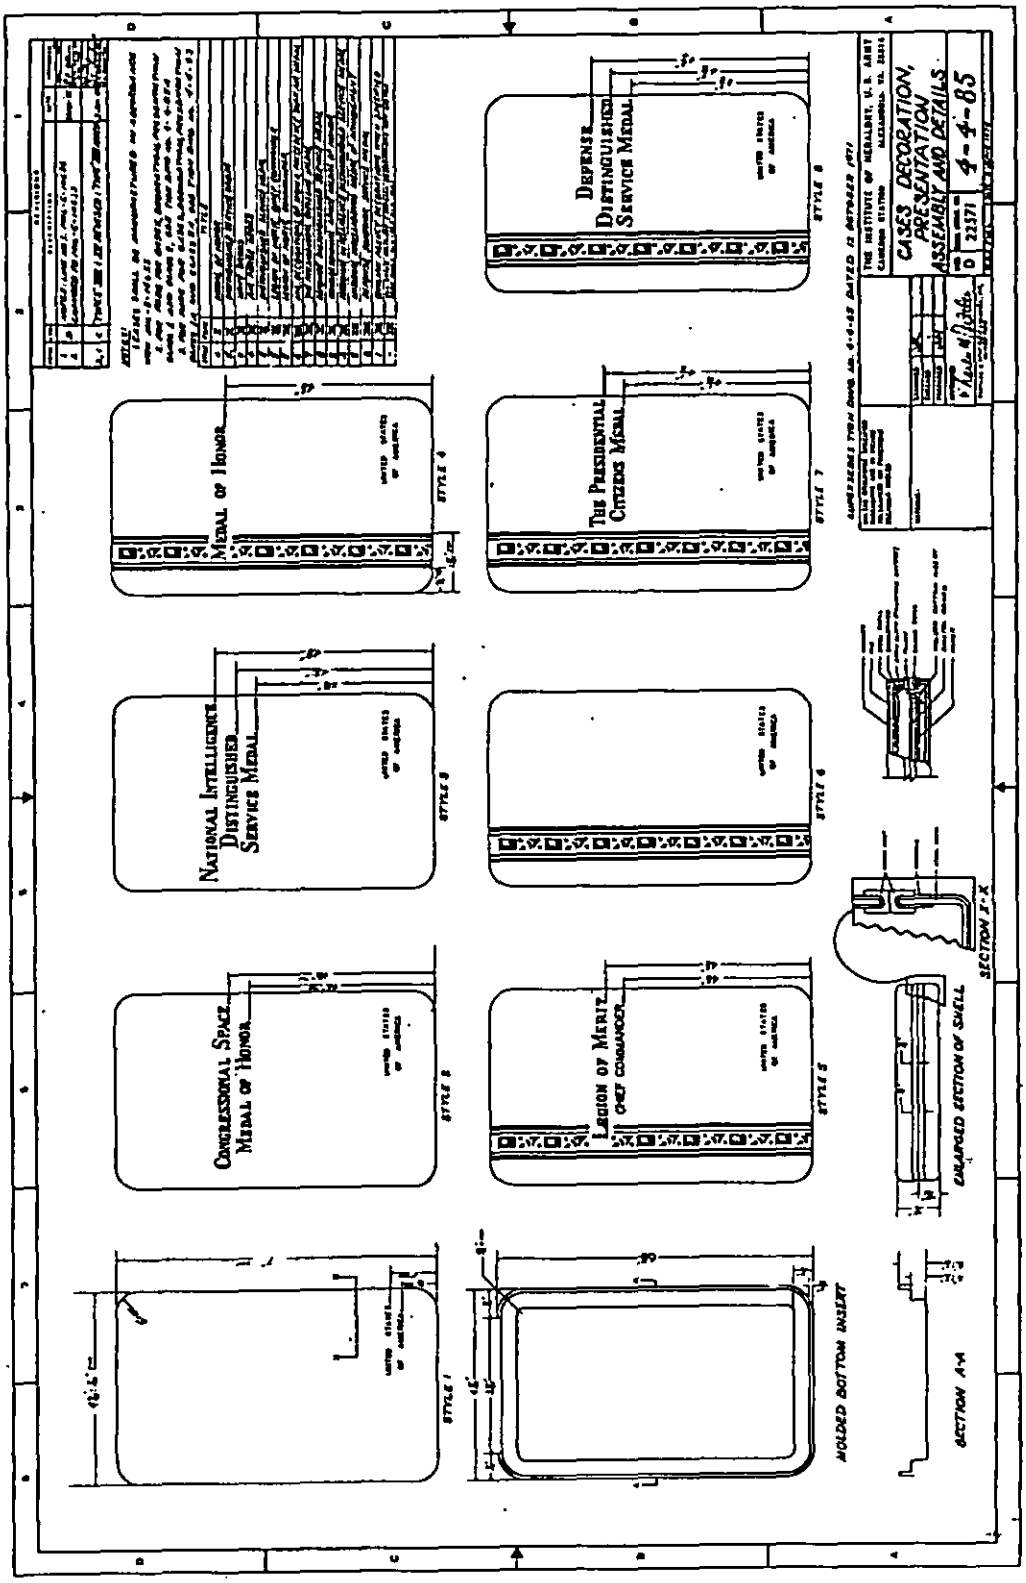


FIGURE 1 - Cases, Decoration, Presentation, Assembly and Details

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

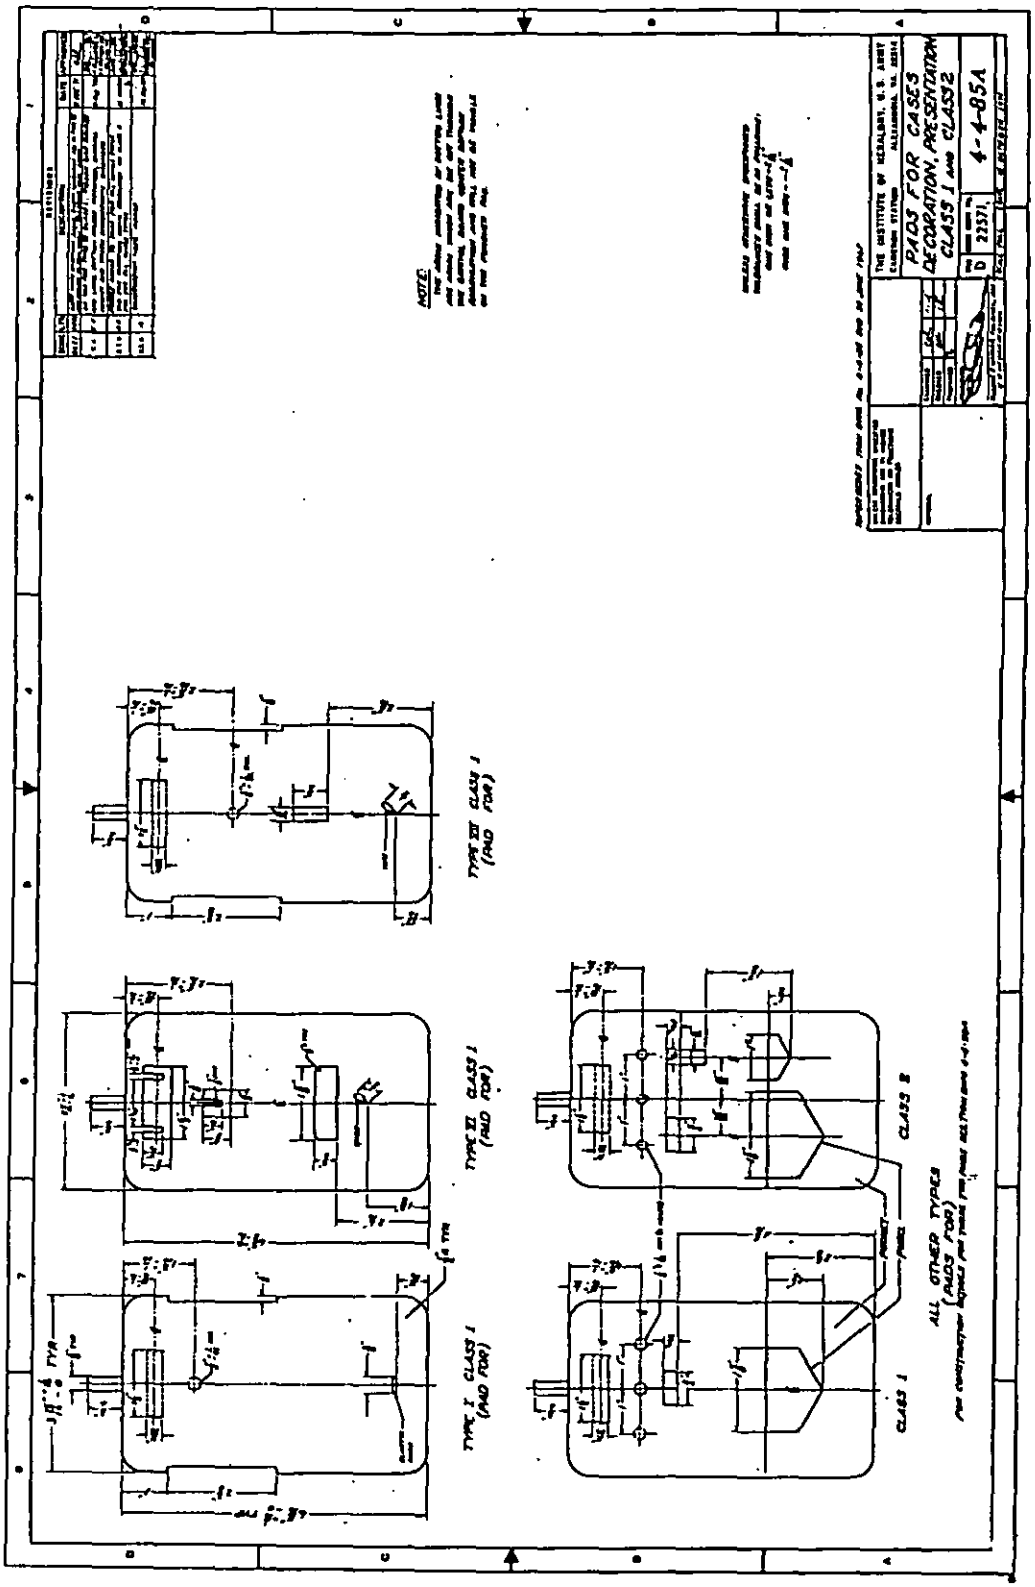


FIGURE 2 - Pads for Cases, Decoration, Presentation, Class 1 and Class 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

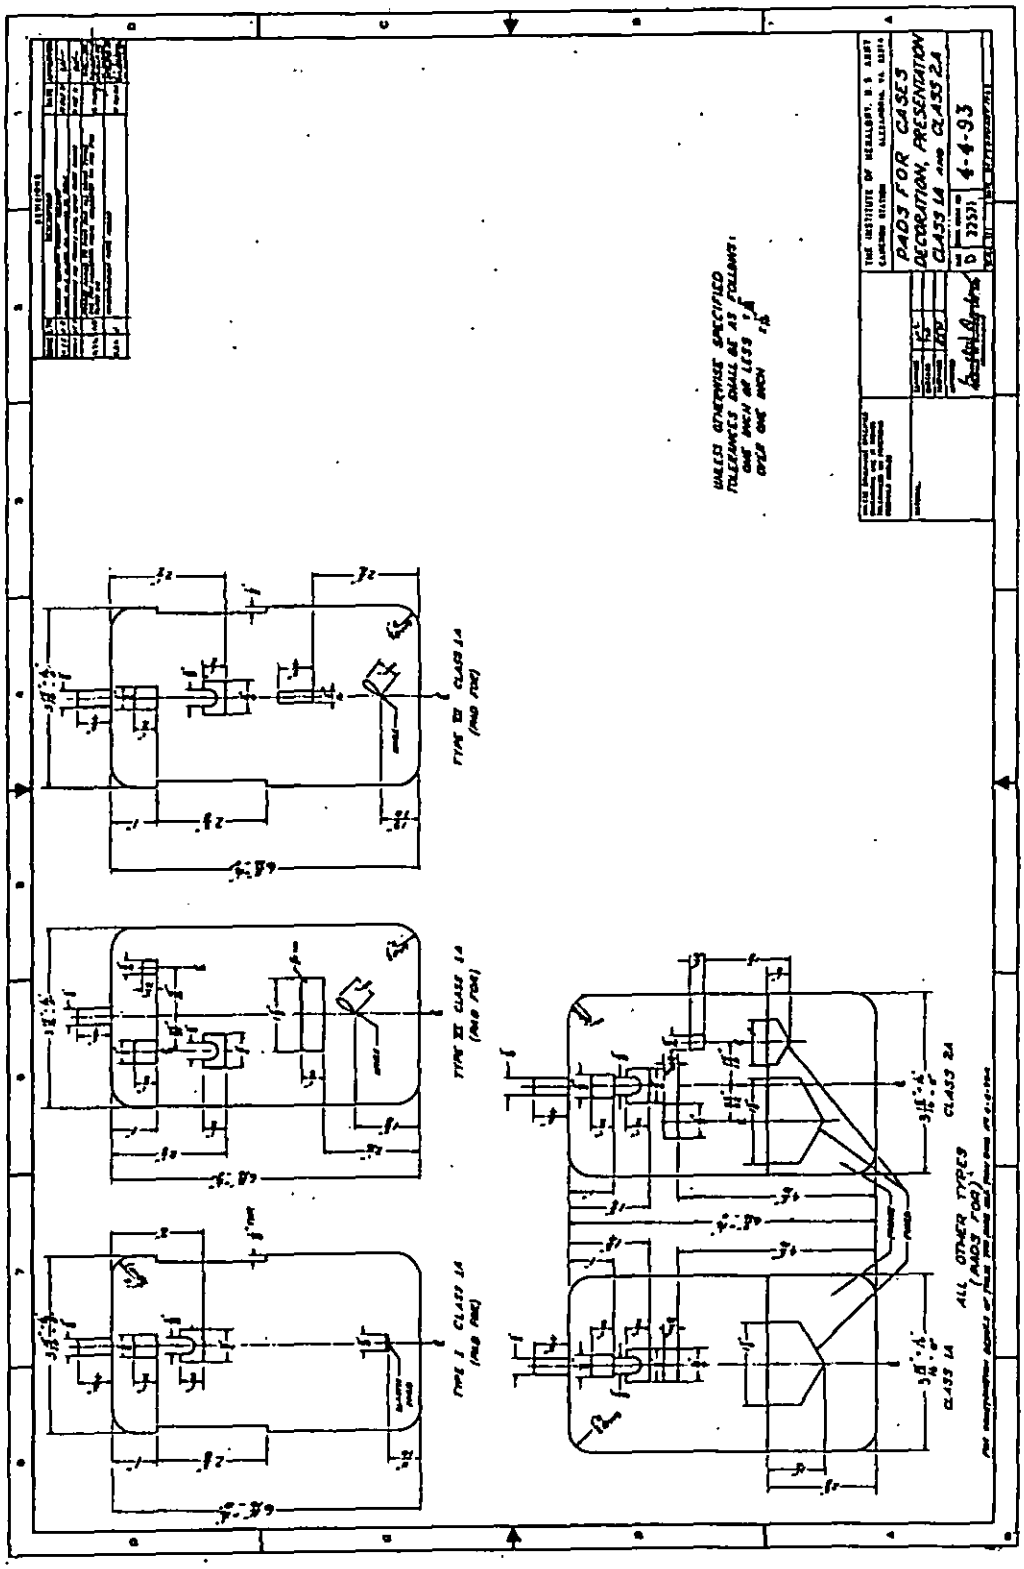


FIGURE 3 - Pads for Cases, Decoration, Presentation, Class 1A and Class 2A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

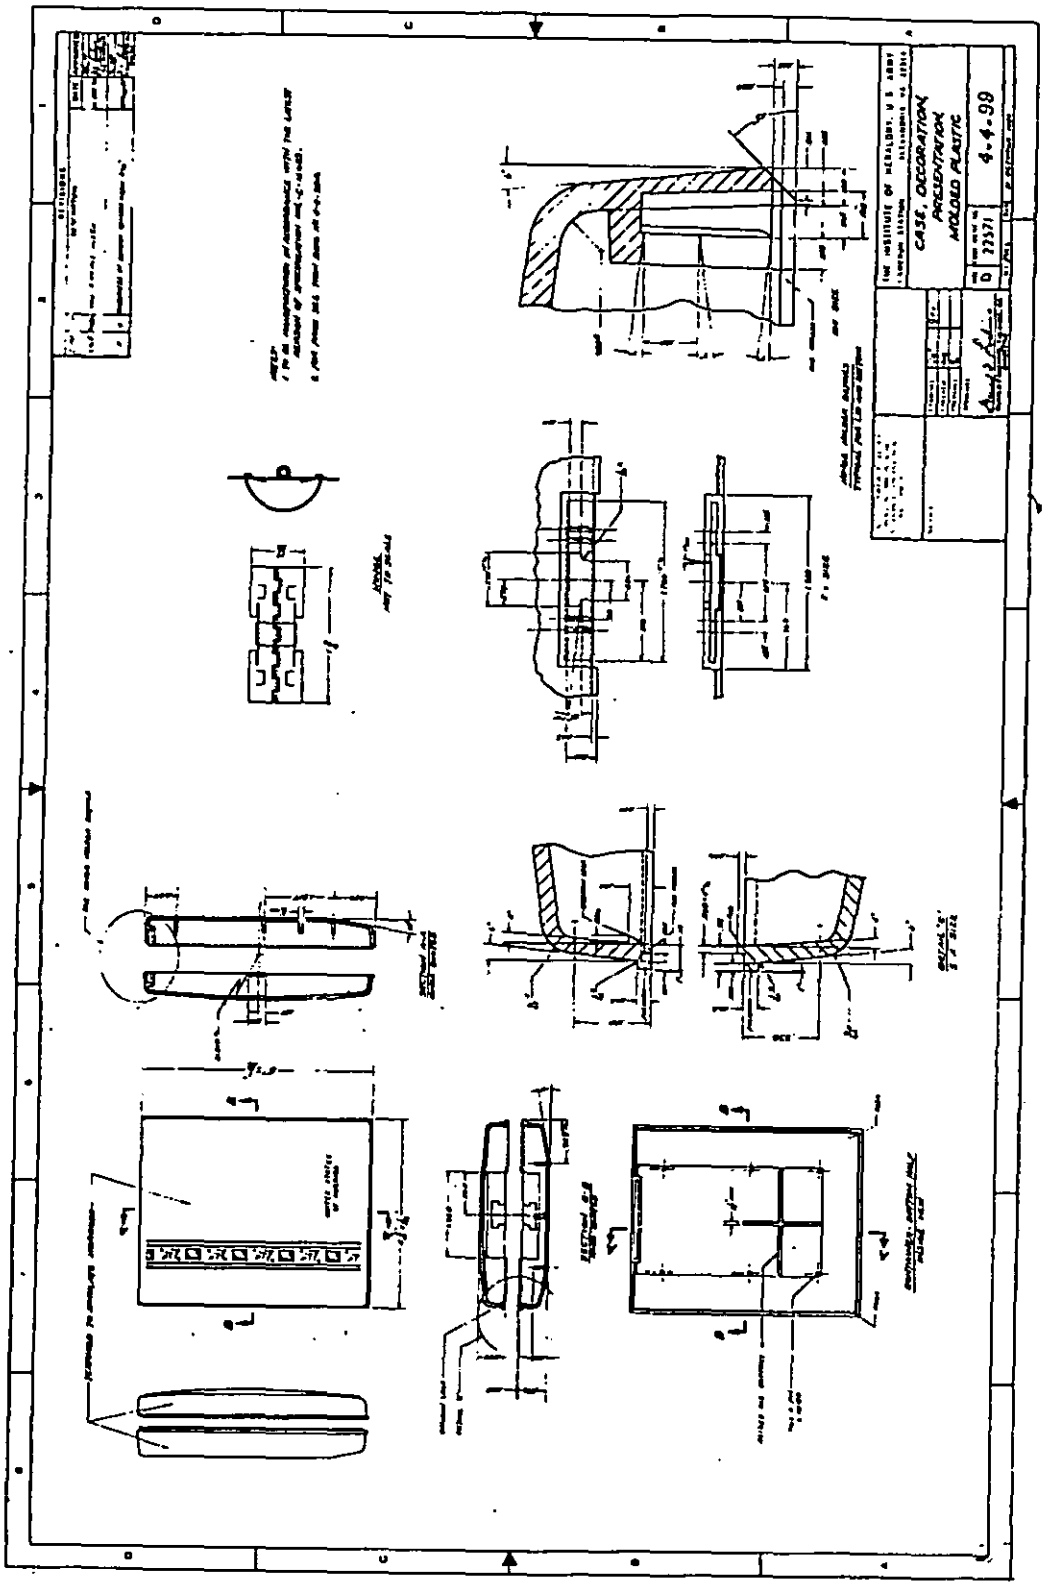


FIGURE 4 - Case, Decoration, Molded Plastic

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

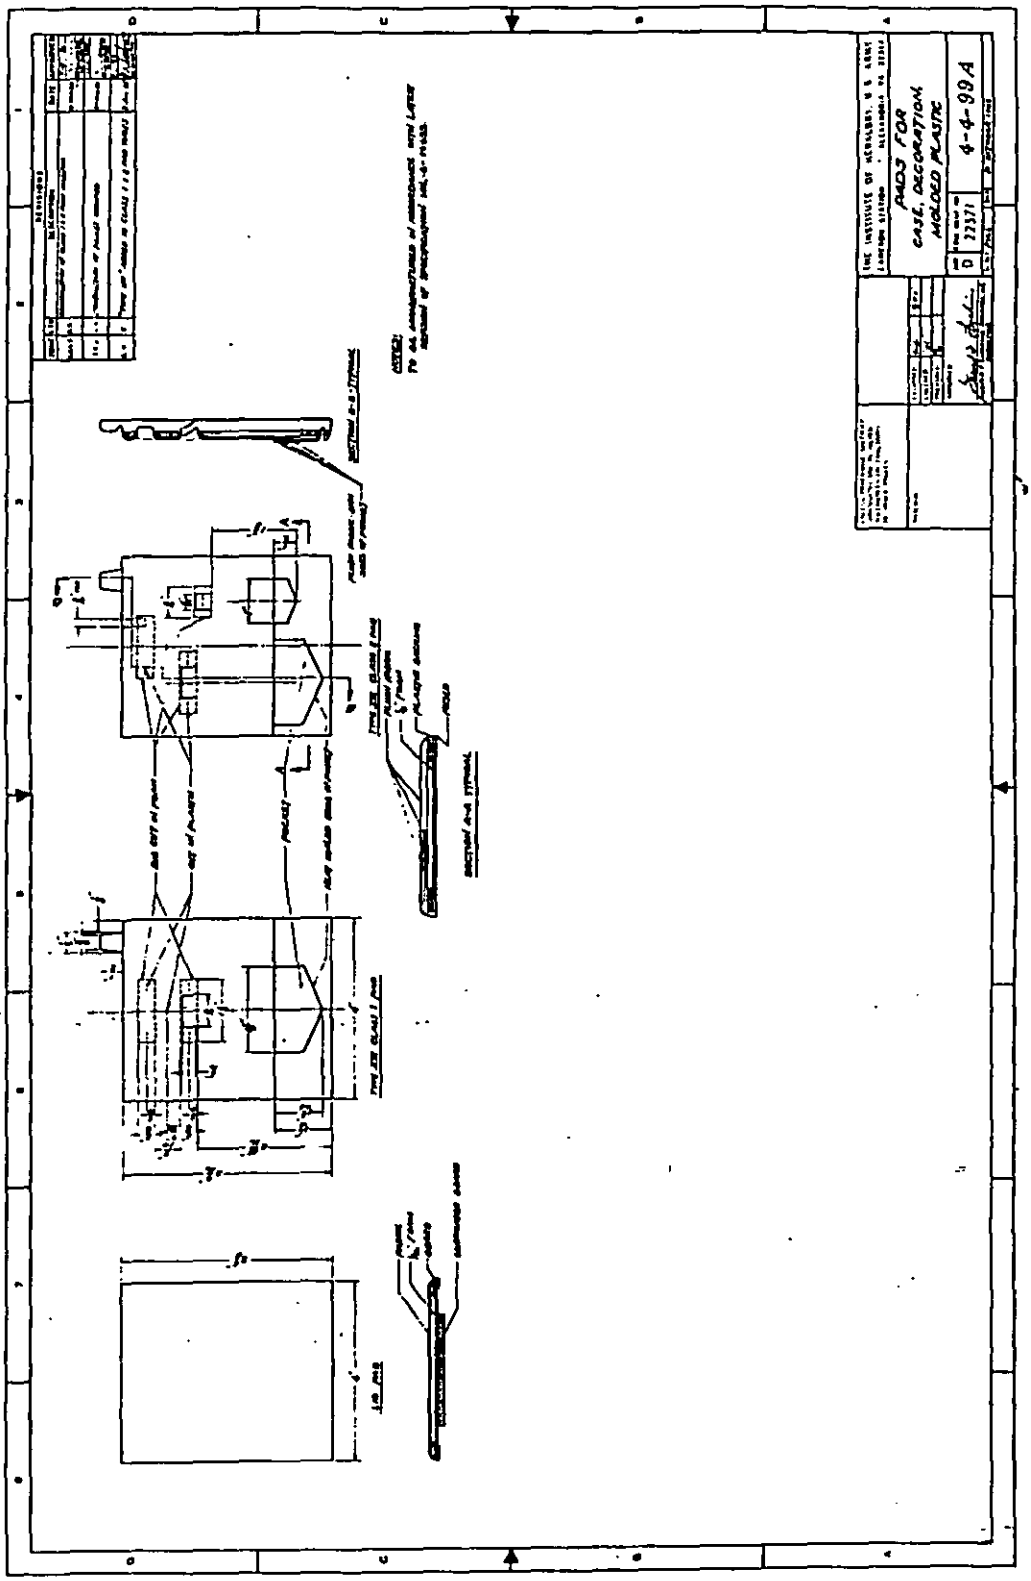


FIGURE 5 - Pads For Case Decoration, Molded Plastic

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

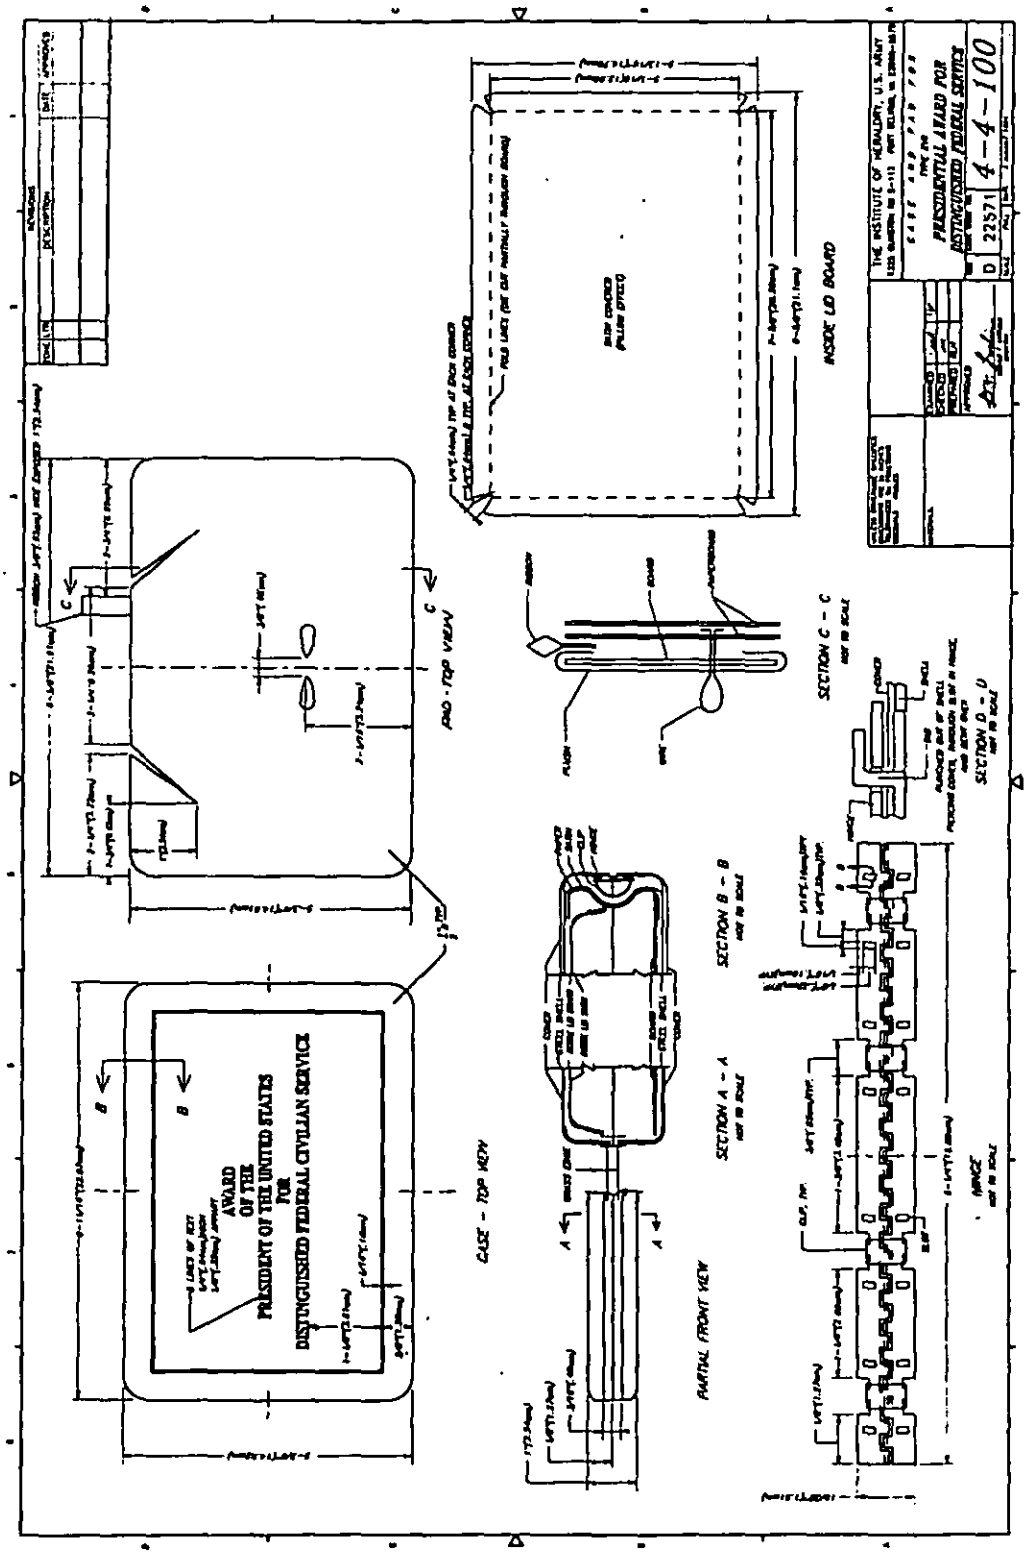


FIGURE 6 - Case and Pad for Type XVII, Presidential Award For Distinguished Federal Civilian Service

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-C-14633D	2. DOCUMENT DATE (YYMMDD) 941221

3. DOCUMENT TITLE
CASES, DECORATION, PRESENTATION

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME The Institute of Heraldry, U.S. Army	b. TELEPHONE (Include Area Code) (1) Commercial (703) 806-4990 (2) AUTOVON DSN 656-4990
c. ADDRESS (Include Zip Code) Technical & Production Division 9325 Gunston Road, Room S112 Fort Belvoir, VA 22060-5579	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-01-18T03:41Z
Check the source to verify that this is the current version before use.