INCH-POUND

MIL-DTL-14633F
28 October 2021
SUPERSEDING
MIL-DTL-14633E
17 June 2020

DETAIL SPECIFICATION

CASES, DECORATION, PRESENTATION

This specification is approved for use by all
Departments and agencies of the Department of Defense

1. SCOPE

1.1 Scope. This specification covers presentation cases for decorations awarded within the Department of Defense.

1.2 Classification. Cases covered by this specification will be of the following types and classes (see 6.4).

Type I - Civilian Agency Decorations

Type II - Civilian Agency Decorations (With Text) Distinguished and higher

Type III - Military Department Decorations (With Filligrie Bar)

Type IV - Military Department Decorations (With Filligrie Bar and Text) Distinguished and higher

Type V - All military department decorations which rank below the Meritorious Service Medal in the order of precedence

Type VI - Award of the President of the United States for Distinguished Federal Civilian Service

Comments, suggestions, or questions on this document should be addressed to The Institute of Heraldry, ATTN: Technical and Production Division, 9325 Gunston Road, Room S-108, Fort Belvoir, VA 22060-5579 or email to usarmy.belvoir.hqda.mil.tioh-webmaster@mail.mil. You may verify the currency of this specification using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specification, standard and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents cited in the solicitation or contract.

FEDERAL SPECIFICATION
PPP-B-676 - Boxes, Set-up

FEDERAL STANDARD
MIL-STD-129 - Marking for Shipment and Storage

DEPARTMENT OF DEFENSE STANDARD
MIL-STD-1916 - DOD Preferred Methods for Acceptance of Product

(Copies of these documents are available online at https://quicksearch.dla.mil).

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS
THE INSTITUTE OF HERALDRY
4-4-85 - Cases, Decoration, Presentation, Assembly and Details
4-4-85A - Pads for Cases, Decoration, Presentation, Class 1 and Class 5
4-4-85B - Pads for Cases, Decoration, Presentation, Type 6 and 9
4-4-85C - Decorations, Presentation and Detail, Mylar Leaf
4-4-99 - Case, Decoration, Presentation, Molded Plastic
4-4-99A - Pads for case, Decoration, Molded Plastic TYPE VI
4-4-100 - Case and Pad for Type VI, Presidential Award for Distinguished Federal Civilian Service.

Figure 8 - Comparison Chart for Old to New Decoration Cases.

(Copies of standards, drawings and Chip sets are available from The Institute of Heraldry, ATTN: Technical and Production Division, 9325 Gunston Road, Room S-108, Fort Belvoir, VA 22060-5579 or usarmy.belvoir.hqda.mi.tioh-webmaster@mail.mil.)

(Figures 1, 2, 3, 4, 5, 6, and 7 are miniature reproductions of the referenced drawings and are attached for information only.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents are those cited in the solicitation (see 6.2).

SAE INTERNATIONAL
SAE-AMS-STD-595 - Colors Used in Government Procurement
SAE-AMS-QQ-A-250/5 - Aluminum Alloy ALCLAD 2024

(Copies for these document are available online at https://sae.org)

IRA GREEN INC.
United States Army Color Card The Official Colors for Branches, Agencies, etc., 1993 Edition.

(Application for copies of the color card should be addressed to the Ira Green Company, Georgia Avenue, Providence, RI 02905 or http://www.iragreen.com).

AMERICAN AND EFIRD, LLC
DoD Standard Shades for Heraldic Yarns, 2012 Edition

(Copies for these document are available online at www.salesRA@amefird.com)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other information services.)

2.3 Order of precedence. Unless otherwise noted herein or in the contract. In the event of a conflict between the text of this document and the references cited herein (except for related specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard sample. Unless otherwise specified (see 6.4), a standard sample of the applicable decoration case shall be furnished for matching color and finish. Samples may be obtained from the contacting officer upon request. Variations from this specification may appear in the standard sample; however, in such cases the specification will govern.

3.2 First article. Unless otherwise specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.2 and 6.5).

3.3 Material. Materials will conform to the referenced specifications and the requirements specified herein.

3.3.1 Steel. Steel for the case shell and attachment tabs will be any commercial grade of sheet steel suitable for this purpose.

3.3.2 Cord, elastic. When elastic cord is required for the case, the cord will be any type commercial grade, woven elastic cord, 1/16 inch in diameter and dyed Yellow Cable No. 67108 of the DoD Standard Shades for Heraldic Yarns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

3.3.3 Chipboard. Chipboard for lining the back of the pads and the interior top and bottom of the case will be 120 pound white chipboard, 1/32 inch in thickness.

3.3.4 Hinge. Except for the Type V (molded plastic) case and Type VI case, the hinge for the case will be a piano type brass plates steel hinge 2-7/8 inches, plus or minus 1/8 inch in length. The overall width of the hinge will be 5/8 inch, plus or minus 1/64 inch. The thickness of the leaf will be a minimum of 1/64 inch. The hinge will be fitted with two spring steel clips insuring closure of the case unless an upward force is exerted on the lid. The hinge for the Type V case will be a 1-3/4 inch spring loaded "C" type steel with a black jetalized finish. The hinge for the Type VI case will be a 6-1/4 inch in length by 19/32 inch high having four spring loaded "C" type steel clips with a black jetalized finish. The clips will be spaced as shown on Drawing 4-4-100 (Figure 7).

3.3.5 Gold for plating. Gold for plating will be 24 karat.

3.3.6 Wire for loop attachments. The wire for the loop attachments will be any type gold plated brass wire, 0.031 inch, plus or minus 0.005 inch in diameter. The exposed length of the loop will be 1/2 inch + 1/8 inch.

3.3.7 Covering. Except for the Type V molded plastic case, all cases will be covered with a navy blue expanded supported smooth polypropylene material.

3.3.7.1 Polypropylene Material. The polypropylene material will be 0.010 inch thick and have a minus 10 degree F. cold crack resistance.

3.3.7.2 Color. The polypropylene material will be navy blue and match chip number 15044 of SAE-AMS-STD-595.

3.3.8 Mylar leaf. The Filligrie Bar and lettering will be accomplished with imitation gold mylar leaf.

3.3.9 Aluminum. The aluminum for the tabs will conform to SAE-AMS-QQ-A-250/5, condition 0.

3.3.10 Plastic. The plastic for the Type V case will be a suitable, high impact, high heat polystyrene. The color shall be navy blue and match chip number 15044 of SAE-AMS-STD-595.

3.3.11 Lacquer. The lacquer will be a pale, clear, synthetic lacquer. The use of pigmented lacquer will not be permitted.

3.4 Construction. Cases will be constructed in accordance with Drawing 4-4-85, 4-4-99 or 4-4-100 as applicable. All dimensions given are finished dimensions. The cases will consist of a lid section and a lower section. With the exception of Type V cases (see 3.3.4), the lid and lower section will be made from 0.015 inch + 0.002 inch steel specified in 3.3.1. With the exception of Type V cases, the exterior surfaces and interior walls of both sections shall be covered with vinyl specified in 3.3.7.1. Except for the portion of the edges covered by the hinge, both sections of Type VI cases will have a brass striking edge. The edge may be made from any type brass or brass plated steel, have a mirror-like polished finish and be coated with lacquer specified in 3.3.11 prior to assembly. The edge will be

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

formed from brass 0.008 inch + 0.002 inch thick. The ends of the striking edge will be butted with 1/4 inch of the ends of the hinge.

3.4.1 Lid Section.
3.4.1.1 Type I through Type IV.

Type I. The top outside surface of the lid will contain the words "UNITED STATES OF AMERICA". The lettering shall be imprinted using mylar leaf specified in 3.3.8. Letters shall be as specified in 3.4.1.8. Placement of the lettering will be as shown on Drawing 4-4-85 (See Figure 1). A polyurethane pad 3/32 inch thick will be glued to the reverse side of the polypropylene material. The interior of the lid will have a white satin covered die-cut chipboard form 7-3/16 inches in length by 4-1/2 inches in width securely glued to the metal shell. The chipboard form will have line-cuts on the reverse side 5/16 inch from each outside edge with each corner notched with a 45 degree cut. The face and walls of the form will be covered with sufficient satin cloth to create a pillow effect when the walls are positioned at a 45 degree angle and the form glued to the lid of the case.

Type II. The top outside surface of the lid will contain the words "UNITED STATES OF AMERICA". The lettering shall be imprinted using mylar leaf specified in 3.3.8. Letter (type and size) will be as specified in 3.4.1.8. The decoration title in the specification slash sheet will be imprinted using mylar leaf specified in 3.3.8. Unless otherwise stated, the letters will be as specified in 3.4.1.9. Placement of the lettering will be as shown on Drawing 4-4-85 (See Figure 1). A polyurethane pad 3/32 inch thick will be glued to the reverse side of the polypropylene material. The interior of the lid shall have a white satin covered die-cut chipboard form 7-3/16 inches in length by 4-1/2 inches in width securely glued to the metal shell. The chipboard form shall have line-cuts on the reverse side 5/16 inch from each outside edge with each corner notched with a 45 degree cut. The face and walls of the form will be covered with sufficient satin cloth to create a pillow effect when the walls are positioned at a 45 degree angle and the form glued to the lid of the case.

Type III. The top outside surface of the lid will contain the words "UNITED STATES OF AMERICA". The lettering and Filligrie Bar shall be imprinted using mylar leaf specified in 3.3.8. Decoration name letters will be as specified in 3.4.1.3. Placement of the lettering and Filligrie Bar shall be as shown on drawing 4-4-85 (See Figure 1). The Filligrie Bar will be as shown on drawing. 4-4-85C (See Figure 4). A polyurethane pad 3/32 inch thick will be glued to the reverse side of the polypropylene material. The interior of the lid will have a white satin covered die-cut chipboard form 7-3/16 inches in length by 4-1/2 inches in width securely glued to the metal shell. The chipboard form shall have line-cuts on the reverse side 5/16 inch from each outside edge with each corner notched with a 45 degree cut. The face and walls of the form will be covered with sufficient satin cloth to create a pillow effect when the walls are positioned at a 45 degree angle and the form glued to the lid of the case.

Type IV. The top outside surface of the lid shall contain the words "UNITED STATES OF AMERICA". The lettering and Filligrie Bar will be imprinted using mylar leaf specified in 3.3.8. Letter (type and size) will be as specified in 3.4.1.8. The decoration title in the specification slash sheet shall imprinted using mylar leaf specified in 3.3.8. Unless otherwise stated, the letters will be as specified in 3.4.1.9. Placement of the lettering and leaf pattern will be as shown on Drawing 4-4-85 (See Figure 1). The Filigree Bar will be as shown on drawing 4-4-85C (See Figure 4). A polyurethane pad 3/32 inch thick will be glued to the reverse side of the polypropylene material. The interior of the lid will have a

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

white satin covered die-cut chipboard form 7-3/16 inches in length by 4-1/2 inches in width securely glued to the metal shell. The chipboard form will have line-cuts on the reverse side 5/16 inch from each outside edge with each corner notched with a 45 degree cut. The face and walls of the form will be covered with sufficient satin cloth to create a pillow effect when the walls are positioned at a 45 degree angle and the form glued to the lid of the case.

3.4.1.2 Lower section Type I through IV. Except for the hinge, the interior walls will be covered with a dust shield. The dust shield will be an integral part of the molded bottom and shall be glued to the bottom as shown on drawing 4-4-85 (Figure 1). The insert will be molded from 0.015 inch thick impact quality styrene with a white cotton flock face. The contractor will mold their name or trademark in the lower third of the insert. The letters shall not exceed 3/8 inch in height. At the hinged end of the case, the free ends of the dust shield and the hinge will be covered with satin cloth. The satin cloth will have the sides neatly pinked or fused to prevent raveling.

3.4.1.3 Type V. The Type V case shall be molded from plastic specified in 3.3.10 in accordance with Drawing 4-4-99 (Figure 5). The walls for both upper and lower sections shall have a typical thickness of 0.070 inch. The exterior surface will have a morocco textured finish. The top surfaces of the filigree bar, the words “UNITED STATES OF AMERICA” and the exterior of the cover will be hot leaf stamped in silk vinyl or imitation gold. The interior lid of the case will be covered with white satin cloth glued to the upper and lower lids.

3.4.1.4 Interior lid. The interior lid will have a white satin cloth or brushed white silk vinyl covered die-cut chipboard form 3-5/8 inches in length by 4 inches in width securely place in the plastic shell. The chipboard form shall have line-cuts on the reverse side 7/16 inch from each outside edge with each corner notched with a 45 degree cut. The face and walls of the form will be covered with sufficient white satin cloth or brushed white silk vinyl to create a pillow effect when the lid is positioned at a 45 degree angle. The lower lid will be unlined.

3.4.1.5 Type VI case. The top outside surface of the lid will contain the Filigree Bar and the words "AWARD OF THE PRESIDENT OF THE UNITED STATES FOR DISTINGUISHED FEDERAL CIVILIAN SERVICE" as shown on Drawing 4-4-100 (Figure 7). The lettering and Filligrie Bar will be imprinted using mylar leaf specified in 3.3.8. Letters (type and size) and placement of the lettering and pattern will be in the style shown on drawing 4-4-100 (Figure7). A polyurethane pad 3/32 inch thick will be glued to the exterior top of the lid shell. The interior of the lid will have a satin covered die-cut chipboard form 8-5/8 inches in length by 5-13/16 inches in width securely glued to the metal shell. The chipboard form will have line-cuts on the reverse side 5/16 inch from each outside edge with each corner notched with a 45 degree cut. The face and walls of the form shall be covered with sufficient satin cloth to create a pillow effect when the walls are positioned at a 45 degree angle and the form glued to the lid of the case.

3.4.1.6 Type VI. Lettering will be as shown on Drawing 4-4-100 (Figure 7).

3.4.1.7 Filligrie Bar. Except for Type VI cases, the Filligrie Bar will be as shown on drawing 4-4-85C (Figure 4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

3.4.1.8 Lettering. Except for Type VI cases, the words "UNITED STATES OF AMERICA" will appear on all style cases and all letters will be accomplished using upper case, Copper Plate, 10 Point Gothic.

3.4.1.9 Decoration title lettering. Type II and Type IV cases will be accomplished using Weiss Roman Bold type face, 30 point caps for the first letter in each word and 18 point caps for all other letters.

3.4.2 Pads.

3.4.2.1 Class 1 through 5 pads. Pads will be fabricated from 14-ply bristol board and will conform to the details and dimensions of Drawing 4-4-85A (Figure 2). The face, edge and a minimum of 3/8 inch on all sides of the back of the pad shall be covered with cadet gray plush or flocking. After the applicable attachments have been securely anchored, the reverse side of the pad will be covered with chipboard specified in 3.2.3. The tab attachments shall be made of steel specified in 3.2.1 or aluminum specified in 3.2.9. Steel tabs will be 0.015 inch + 0.002 inch thick. Aluminum tabs will be 0.023 inch + 0.002 inch thick. The lift tab will be made from white satin ribbon, 3/8 inch wide, doubled over with the selvage along each edge.

3.4.2.2 Class 6 through 9 pads. Pads will be fabricated in accordance with drawing 4-4-85B (Figure 3). The pads will consists of a vacuum formed vinyl impregnated urethane. The lower section of the pad will contain a recessed circular pocket for each medal required. The medal will be covered with a clear plastic cap as applicable.

3.4.2.3 Class 10 and 11 Pads. The pads will be fabricated as specified in drawing 4-4-99A (Figure 6). The pads will consists of a vacuum formed vinyl impregnated urethane. The lower section of the pad will contain a recessed circular pocket for each medal required. The medal will be covered with a clear plastic cap as applicable.

3.4.2.4 Type VI pad. Pad will be fabricated from 14-ply bristol board and will conform to the details and dimensions of Drawing 4-4-100 (Figure 7). The face, edge and a minimum of 3/8 inch on all sides of the back of the pad will be covered with white plush. After the applicable attachments have been securely anchored, the reverse side of the pad will be covered with chipboard specified in 3.2.3.

3.4.2.5 Marking. The manufacturer will mold their name in the interior bottom of the case. The letters will be clearly readable once the interior pad is lifted.

3.5 Workmanship. Cases will be clean, well made and meet the acceptable quality levels established by this specification and as specified in 4.3.3.1.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

4.2 Inspection conditions. Unless otherwise specified, all inspection shall be performed in accordance with the test conditions specified in 4.4 and 4.5.

4.3 First article inspection. Inspection and testing of the first article (see 3.2) shall be made of a completely finished item for all provisions of this specification applicable to the end product examination and tests.

4.4 Conformance inspection. Sampling for inspection and acceptance shall be in accordance with the provisions set forth in MIL-STD-1916, except where otherwise indicated.

4.4.1 Testing of components. Inspection shall be performed on components and materials listed in Table I for the test characteristics shown therein. Material listed in Table II may be accepted on a contractor's certificate of compliance for requirements specified in applicable paragraphs of this specification. The government reserves the right to test samples of the gold and silver (without additional charge) to verify the contractor's certification.

TABLE I. **Testing of components.**

COMPONENT	**CHARACTERISTICS**	**RQM'T ¶**	**TEST METHOD**	RESULTS REPORTED AS
Cord, elastic	Material identification, diameter and color	3.2.2	standard commercial	nearest 0.1%
Chipboard	Material identification and weight, finish and thickness	3.2.3 and 3.3.4.1	standard commercial	pass/fail
Attachment loop wire	Material identification and karat of plating	3.2.6	standard commercial	nearest 0.1%
Polypropylene material	Material identification, thickness minus 10 degrees F cold crack resistance, grain retention, color	3.2.7.1 and 3.2.7.2	standard commercial	pass/fail
Mylar leaf	Material identification	3.2.8	standard commercial	pass/fail
Polystyrene	Material identification and color	3.2.10	standard commercial	pass/fail
Lacquer	Material identification	3.2.11	standard commercial	pass/fail
Polyurethane pad	Material identification and thickness	3.3.1.1 and 3.3.1.2	standard commercial	pass/fail
Molded insert	Material identification, thickness and facing	3.3.2	standard commercial	pass/fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

Lift tab	Material identification	3.3.3.1	standard commercial	pass/fail
Pad	Material identification and plies	3.3.3.1 thru 3.3.3.3	standard commercial	pass/fail
Tabs	Material identification and thickness	3.3.3.1	standard commercial	pass/fail

4.3.2 Process examination. Examination shall be made during the manufacturing process for the requirements listed below to establish that no deviation is made from indicated requirements. Whenever a nonconformance is noted, correction shall be made to affected items and the process.

Requirements or operation	**Rqm't ¶**
Polyurethane pad is glued to the exterior top of the lid shell	3.4
Die-cut cardboard form securely glued to metal shell interior of the lid section	3.3.4.1
Wire loops, metal tab attachments, lift tabs and elastic cords securely anchored to reverse side of pad	3.3.3.1
Sides and back of pad are covered with a minimum of 3/8 inch (0.95 cm) of gray plush or flocking	3.3.3.1

4.3.3 Inspection of the end item.

4.3.3.1 Visual examination of case. Examination shall be made at a distance of 16 to 22 inches under normal daylight or its equivalent. The defects found during examination shall be classified in accordance with 4.3.3.1.1 and 4.3.3.1.2. The unit of product for these examinations shall be one completely fabricated case.

TABLE II. DEFECTS.

Examine	Defect	Classification Major (*)	Minor
Exterior surface	Color and finish does not match the standard or approved sample	x	-
	Not covered as specified	x	-
	Pattern or lettering missing	x	-
	Not correct pattern or lettering	-	*
	Lettering incorrect size or position	-	*
	Covering not taut, i.e., any wrinkle(s), bubble(s), or crease	x	-
	Visible imperfection in cover, i.e., spotted or stained, cut, torn, abraded or otherwise damaged.....	-	*

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

	Pattern or lettering not clear or not free of voids or skips, not well defined	-	*	-
Interior surface	Plush, flocking or satin does not match the standard or approved sample for color, finish or texture	x	-	-
	Visible imperfection in plush, or flocking, elastic cord or satin, i.e., stained, discolored, cut, torn, frayed or otherwise damaged.....	-	*	-
	Elastic cord not correct color	-	-	x
	Satin cloth does not have pinked or fused sides	-	-	x
Workmanship	Hinge not as specified	x	-	-
	Lid (when closed) is not aligned with the bottom of the case	x	-	-
	Case is punctured, malformed, broken, indented or otherwise damaged	x	-	-
	Lid does not close completely over components.....	x	-	-
	Lid does not spring closed when released from a 30 degree angle	x	-	-
	indented or otherwise damaged	x	-	-
	Metal edge contains sharp edge, burr or is dented, bent or otherwise damaged	-	*	-
	Hinge not covered on the inside with satin cloth	x	-	-
	Lid recess for dust shield not at 45 degree angle	-	-	x
	Attachment(s), lift tab(s), wire loop(s) or cord not securely anchored	-	*	-
	Ends of striking edge not butted flush with ends of the hinge	-	-	x
	The face and walls of the interior lid does not have a pillowy effect	-	*	-
	Incorrect pad or no pad.....	x	-	-
	Pad not covered as specified	-	*	-
	Molded insert missing	x	-	-
	Molded insert not securely glued to shell…	-	*	-
	One or more die-cut areas missing from pad…	x	-	-
	Die-cut area(s) not proper size or not in the proper location	-	*	-
Marking	Marking not placed as required	-	*	-
	Missing, illegible or incorrect	-	-	x

4.3.3.1.1 Examination for defects in finish, design, material, construction, workmanship and marking. Defects designated by an asterisk (*) shall be classified as major when seriously affecting appearance or serviceability and minor when affecting appearance or serviceability but not seriously.

4.3.3.1.2 Examination of cases for defects in dimensions. Any dimension that is not within the specified tolerance shall be classified as a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

4.3.3.1.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery, with the exception that it need not be sealed. Defects of closure listed below shall be examined on a shipping container fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot.

EXAMINE	DEFECT
Markings, exterior and Interior	Missing, incorrect, illegible or improper size, location sequence or method of application
Materials	Component missing, damaged or otherwise defective, affecting serviceability
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, inadequate stapling.
	Bulging or distortion of containers
Content	Number in container is more or less than required.
Weight	Net weight exceeds the requirements.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DOD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory)

6.1 Intended use. Cases covered by this specification are intended to be used as presentation cases for decorations awarded by the U.S. Government.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number and date of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

issue of individual documents referenced (See 2.1)
b. When first article is required. (See 3.1).
c. Selection of application levels of packaging and packing
d. When special marking is required (See 5.3)
e. Packaging requirements (See 5.1)

6.3 Type V cases (molded plastic case). These cases are only authorized for use with decorations that rank below the Meritorious Service Medal, in order of precedence.

6.4 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.5 First article. When first article inspection is required, the contracting officer should provide specific guidance to offers whether the item should be a preproduction sample, a first production sample or a standard production item from the contractor's current inventory as specified in 3.1. The first article should consist of one completed item. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or tests, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.6 Subject term (key word) listing.

Decoration case
Medal case
Molded Plastic case
Presentation case
Pillow Effect

6.7 CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

NEW NOMENCLATURE	OLD NOMENCLATURE
Type I - Civilian Agency Decorations	**Type XV - All Civilian Agency Decorations not listed**
	Class 2 - All Personnel
Type II - Civilian Agency Decorations (With Text)	**Type XI - Congressional Space Medal of Honor**
	Class 2 - All Personnel
	Type XII - National Intelligence Distinuished Service Medal
	Class 2 - All Personnel
	Type XIII - National Intelligence Medal for Achievement
	Class 2 - All Personnel
Type III - Military Department Decorations which rank above the Air Medal in the order of precedence	**Type VIII - All Military department decorations not listed which rank above the Air Medal in the order of precedence**
	Class 1 - U.S. Military Personnel
	Class 1A - U.S. Military Personnel (with extra tabs)
	Class 2 - Civilian & Foreign Military Personnel
	Class 2A - Civilian & Foreign Military Personnel (with extra tabs)
Type IV - Military Department Decorations (with text)	**Type I - Medal of Honor**
	Class 1 - U.S. Military Personnel
	Class 1A - U.S. Military Personnel (with extra tabs)
	Type II - Distinguished Service Cross
	Class 1 - U.S. Military Personnel
	Class 1A - U.S. Military Personnel (with extra tabs)
	Class 2 - Civilian & Foreign Military Personnel
	Class 2A - Civilian & Foreign Military Personnel (with extra tabs)
	Type III - Navy Cross
	Class 1 - Navy & Marine Corps Personnel
	Class 1A - Navy & Marine Corps Personnel (with extra tabs)
	Type IV - Air Force Cross
	Class 1 - Air Force Personnel
	Class 1A - Air Force Personnel (with extra tabs)
	Class 2 - Civilian & Foreign Military Personnel
	Class 2A - Civilian & Foreign Military Personnel (with extra tabs)
	Type V - Distinguished Service Medal
	Class 2 - U.S. Military, Civilian & Foreign Military Personnel
	Class 2A - U.S. Military, Civilian & Foreign Military Personnel (with extra tabs)
	Type VI - Legion of Merit, Chief Commander
	Class 1 - Regular
	Class 1A - With extra tabs
	Type VII - Legion of Merit, Commander
	Class 1 - Regular
	Class 1A - With extra tabs
	Type IX - The Presidential Citizens Medal
	Class 2 - All Personnel
	Type X - Defense Distinguished Service Medal
	Class 2 - All Personnel
	Type XIV - Defense Superior Service Medal
	Class 2 - All Personnel
Type V - Military Department Decorations which rank below the Meritorious Service Medal in the order of precedence	**Type XVI - All miilitary department decorations not listed which rank below the Meritorious Service Medal in the order of precedence**
Type VI - Award of the President of the United States for Distinguished Federal Civilian Service	**Type XVII - Award of the Presdident of the United States for Distinguished Federal Civilian Service**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

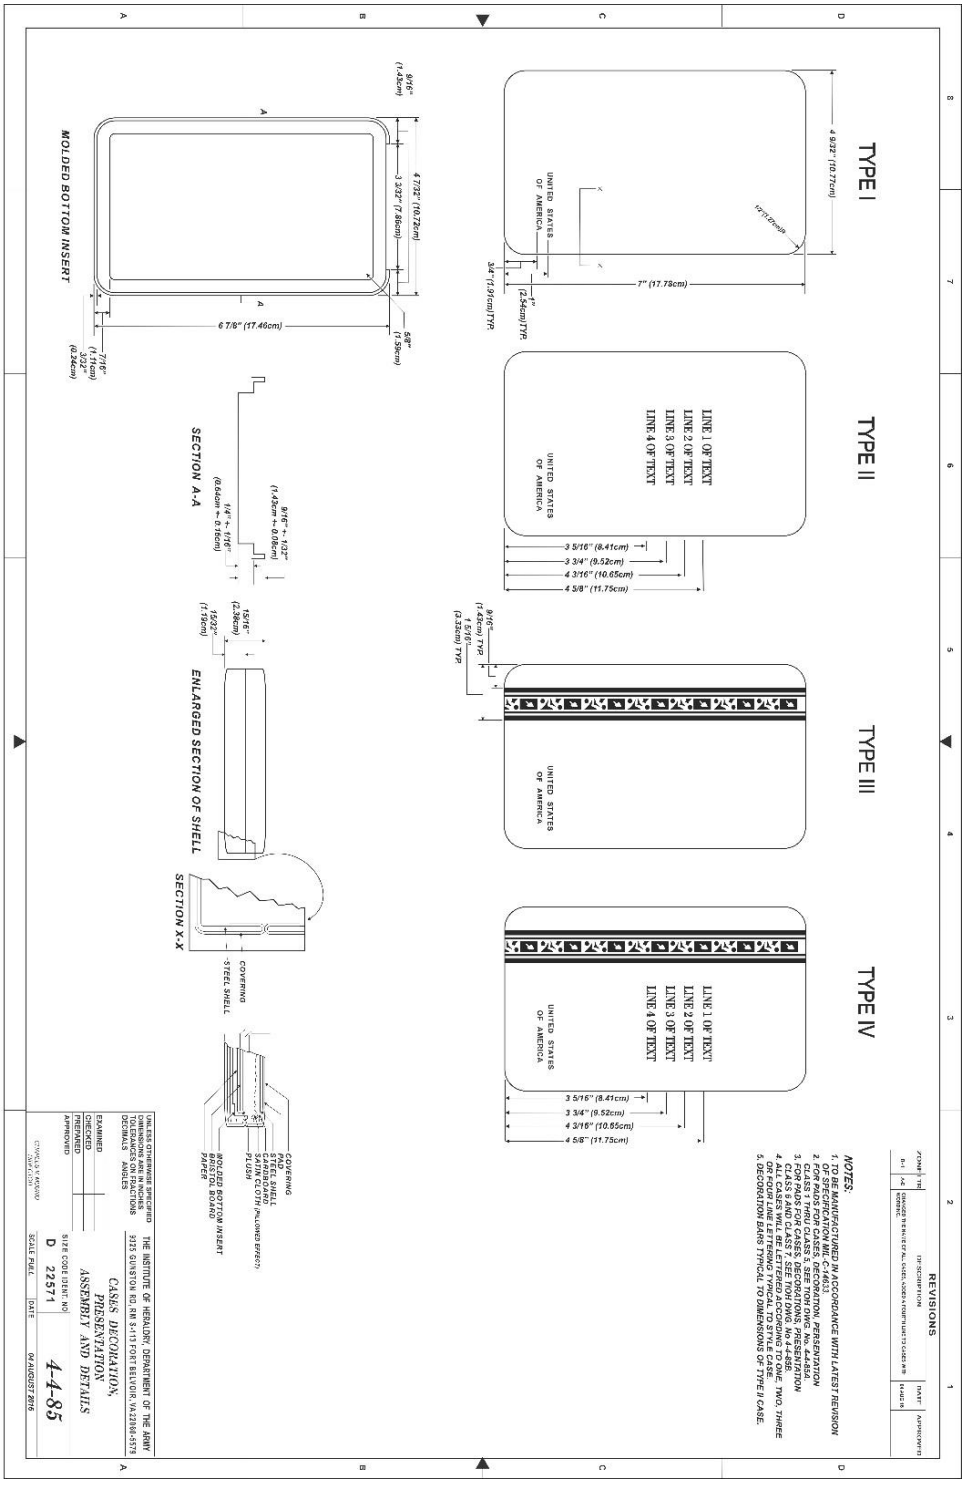


FIGURE 1. **CASES DECORATION, PRESENTATION ASSEMBLY AND DETAILS 4-4-85**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

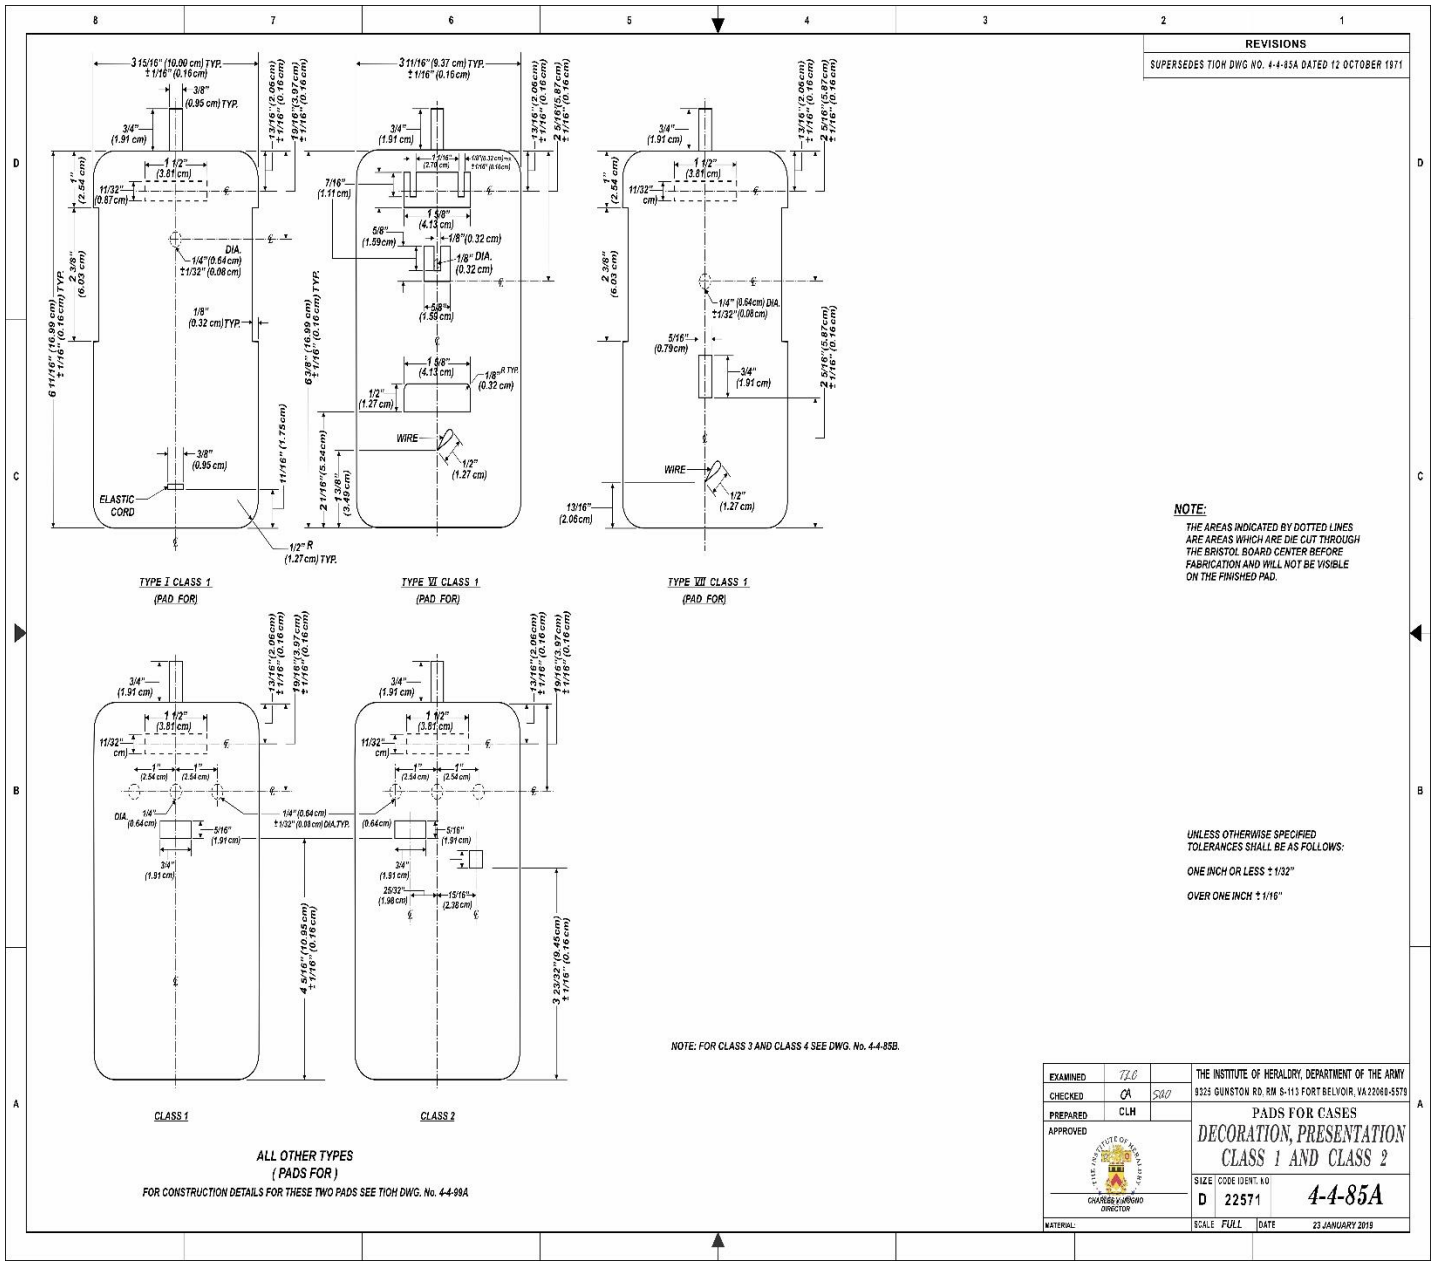


FIGURE 2. **PADS FOR CASES DECORATIONS, PRESENTATION TYPE I through V 4-4-85A**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

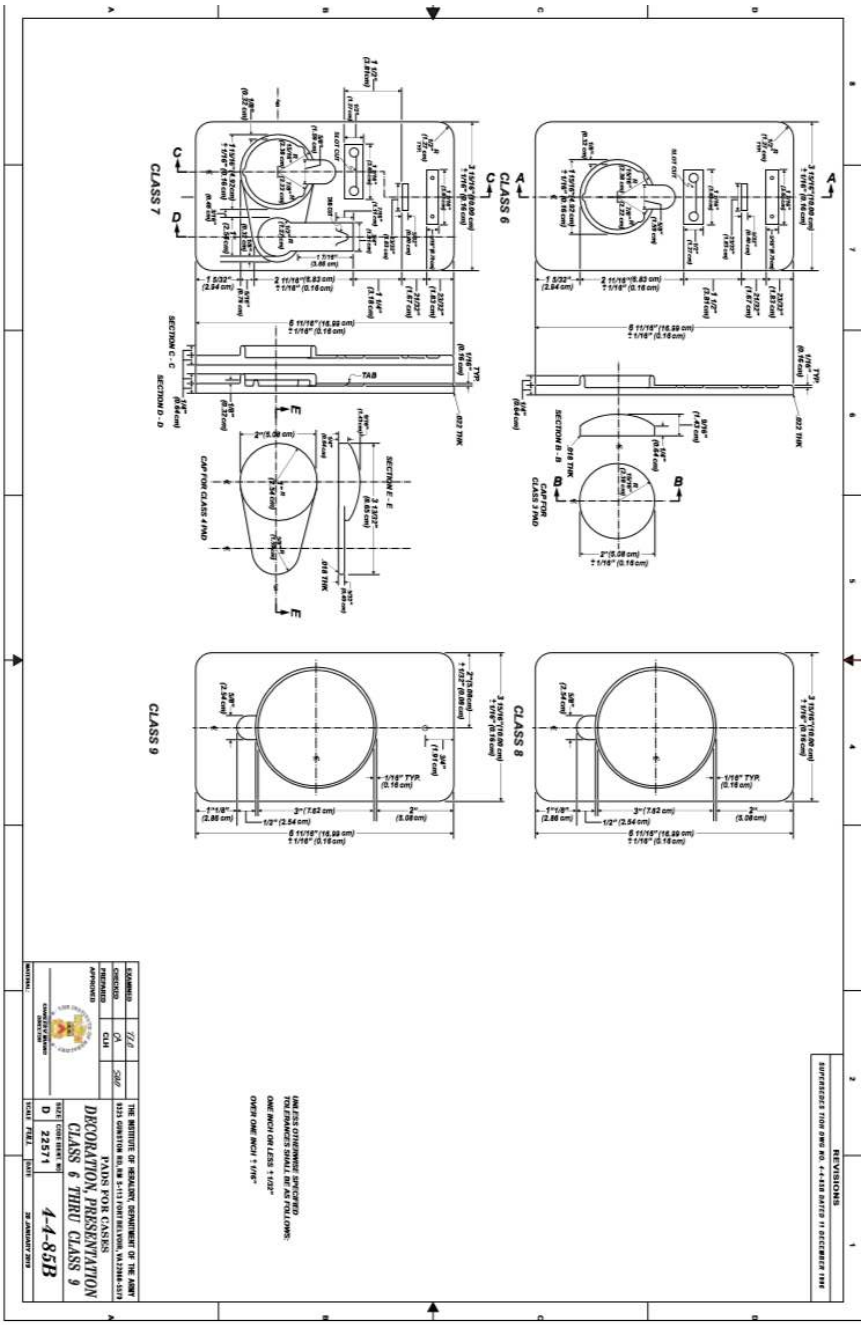


FIGURE 3. **PADS FOR CASES DECORATIONS, PRESENTATION TYPE VI through IX 4-4-85B**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

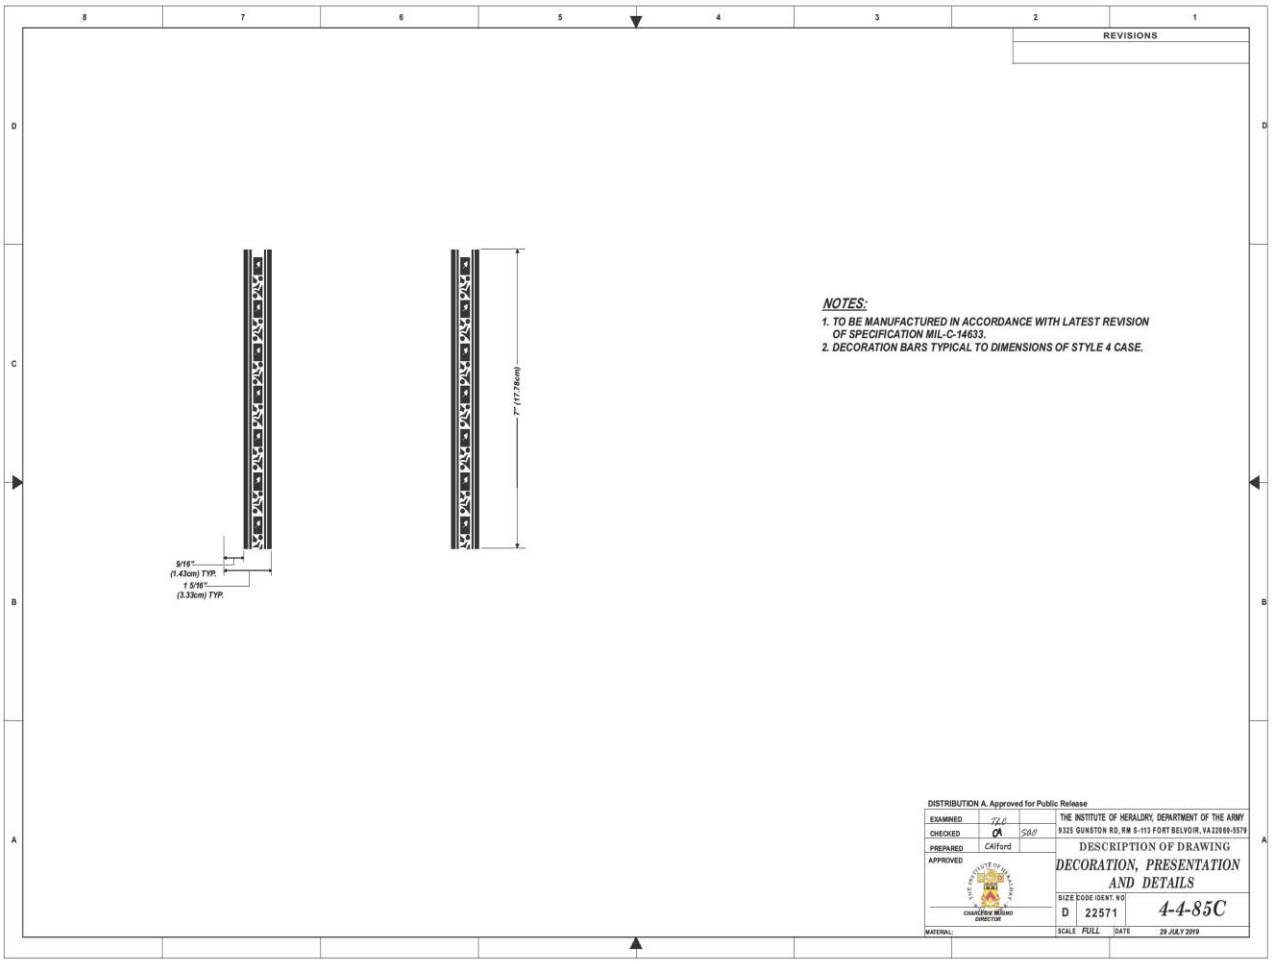


FIGURE 4: **DECORATION, PRESENTATION AND DETAIL FILLIGRIE BAR 4-4-85C**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

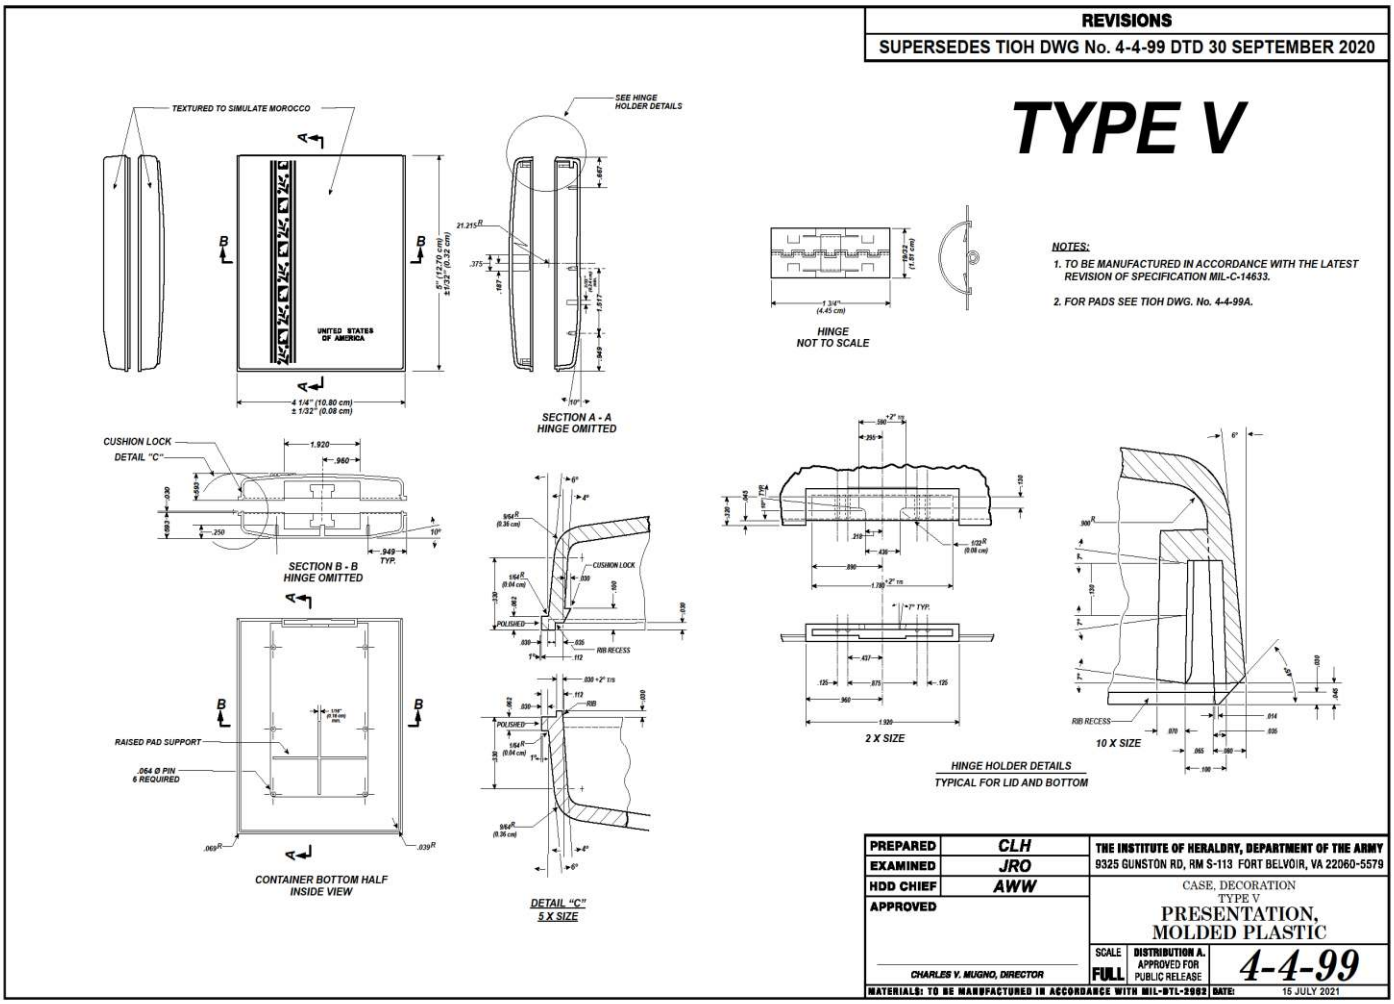


FIGURE 5. **CASE DECORATION, PRESENTATION, MOLDED PLASTIC TYPE VI 4-4-99**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

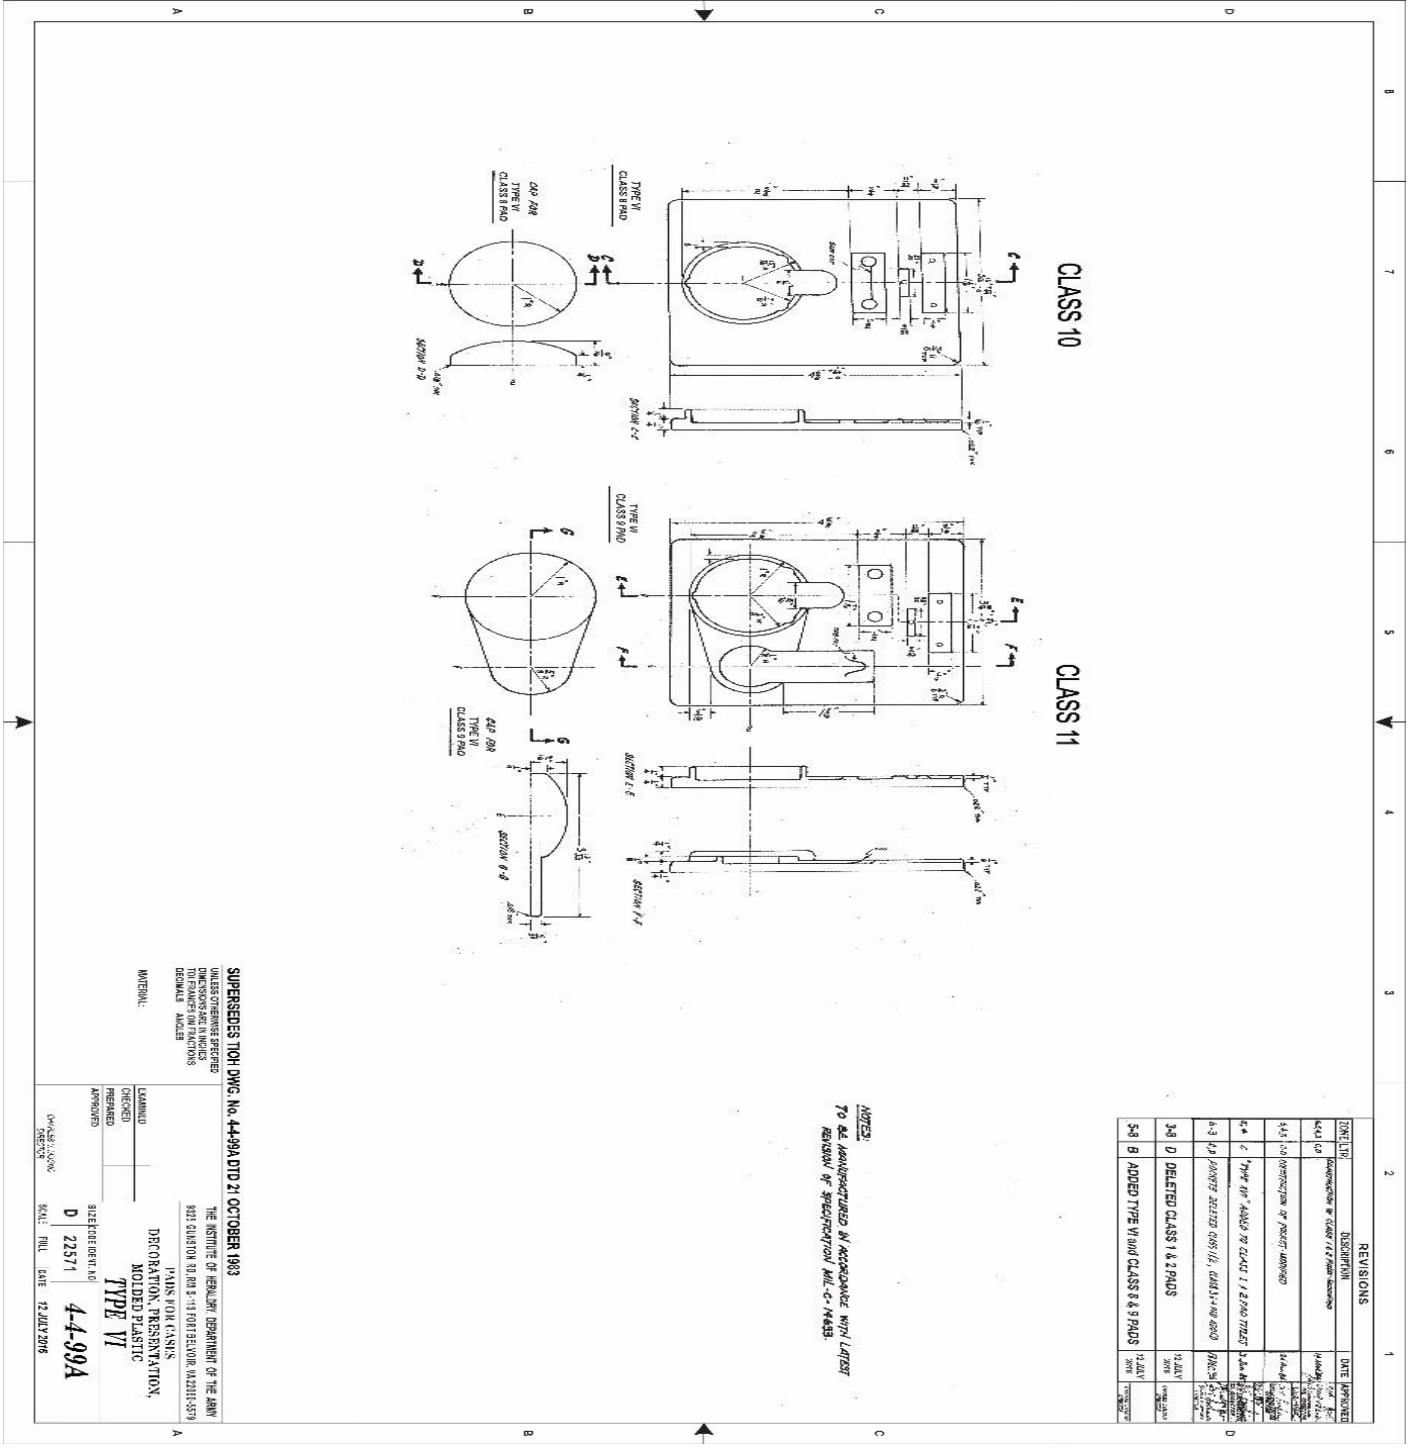


FIGURE 6. **PADS FOR CASE DECORATION, PRESENTATION, MOLDED PLASTIC TYPE VI 4-4-99A**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

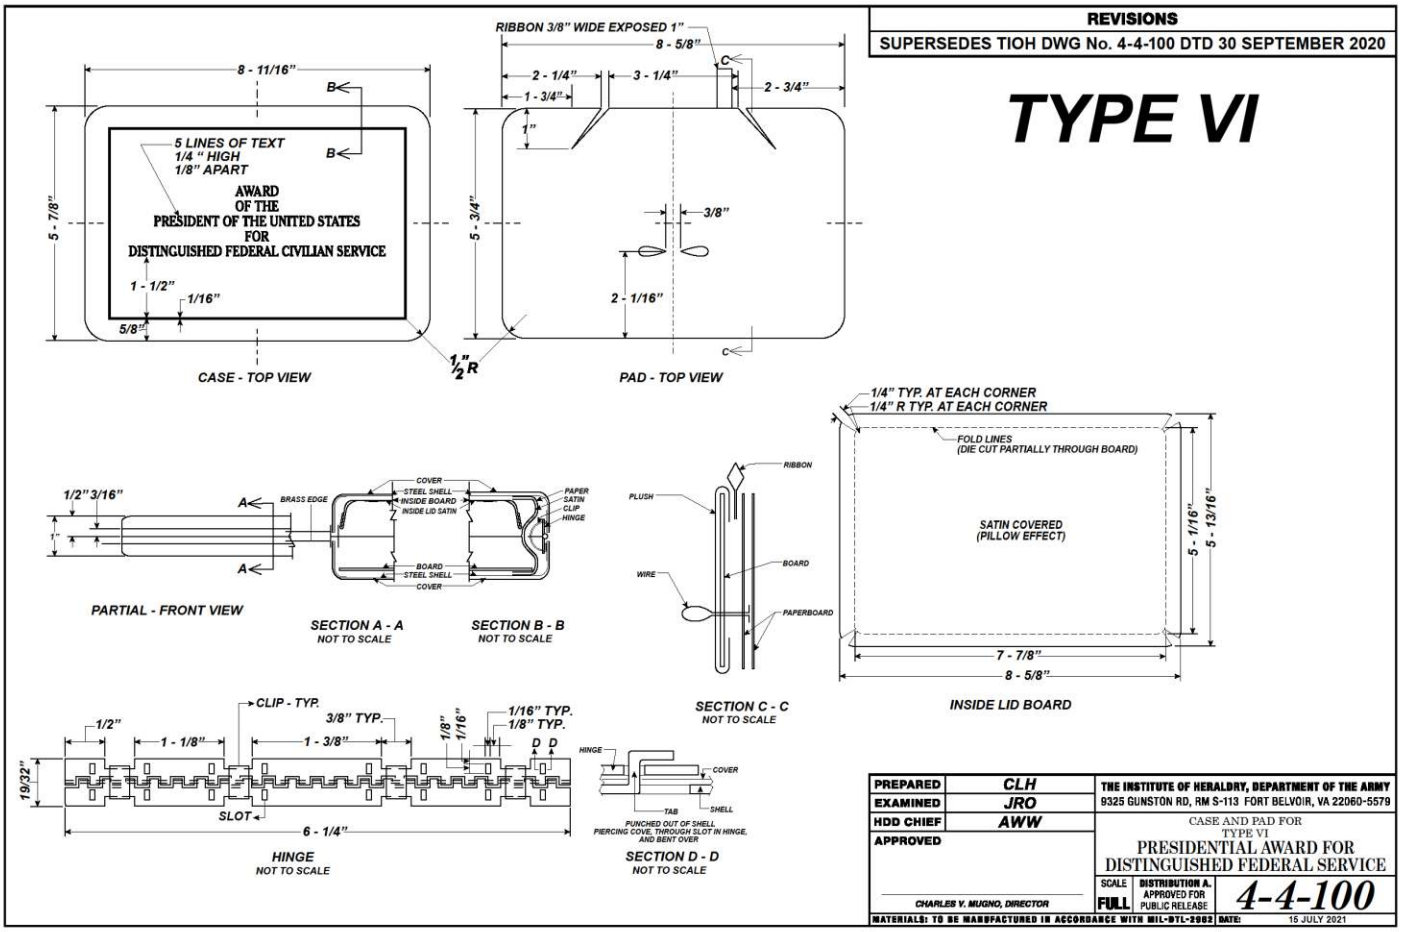


FIGURE 7. **CASE AND PAD FOR TYPE IV PRESIDENTIAL AWARD FOR DISTINGUISHED FEDERAL SERVICE 4-4-100**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

NEW NOMENCLATURE	OLD NOMENCLATURE
Type I - Civilian Agency Decorations	**Type XV - All Civilian Agency Decorations not listed**
	Class 2 - All Personnel
Type II - Civilian Agency Decorations (With Text) Distinguished and higher	**Type XI - Congressional Space Medal of Honor**
	Class 2 - All Personnel
	Type XII - National Intelligence Distinuished Service Medal
	Class 2 - All Personnel
	Type XIII - National Intelligence Medal for Achievement
	Class 2 - All Personnel
Type III - Military Department Decorations which rank above the Air Medal in the order of precedence	**Type VIII - All Military department decorations not listed which rank above the Air Medal in the order of precedence**
	Class 1 - U.S. Military Personnel
	Class 1A - U.S. Military Personnel (with extra tabs)
	Class 2 - Civilian & Foreign Military Personnel
	Class 2A - Civilian & Foreign Military Personnel (with extra tabs)
Type IV - Military Department Decorations (with text) Distinguished and higher	**Type I - Medal of Honor**
	Class 1 - U.S. Military Personnel
	Class 1A - U.S. Military Personnel (with extra tabs)
	Type II - Distinguished Service Cross
	Class 1 - U.S. Military Personnel
	Class 1A - U.S. Military Personnel (with extra tabs)
	Class 2 - Civilian & Foreign Military Personnel
	Class 2A - Civilian & Foreign Military Personnel (with extra tabs)
	Type III - Navy Cross
	Class 1 - Navy & Marine Corps Personnel
	Class 1A - Navy & Marine Corps Personnel (with extra tabs)
	Type IV - Air Force Cross
	Class 1 - Air Force Personnel
	Class 1A - Air Force Personnel (with extra tabs)
	Class 2 - Civilian & Foreign Military Personnel
	Class 2A - Civilian & Foreign Military Personnel (with extra tabs)
	Type V - Distinguished Service Medal
	Class 2 - U.S. Military, Civilian & Foreign Military Personnel
	Class 2A - U.S. Military, Civilian & Foreign Military Personnel (with extra tabs)
	Type VI - Legion of Merit, Chief Commander
	Class 1 - Regular
	Class 1A - With extra tabs
	Type VII - Legion of Merit, Commander
	Class 1 - Regular
	Class 1A - With extra tabs
	Type IX - The Presidential Citizens Medal
	Class 2 - All Personnel
	Type X - Defense Distinguished Service Medal
	Class 2 - All Personnel
	Type XIV - Defense Superior Service Medal
	Class 2 - All Personnel
Type V - Military Department Decorations which rank below the Meritorious Service Medal in the order of precedence	**Type XVI - All miilitary department decorations not listed which rank below the Meritorious Service Medal in the order of precedence**
Type VI - Award of the President of the United States for Distinguished Federal Civilian Service	**Type XVII - Award of the Presdident of the United States for Distinguished Federal Civilian Service**

FIGURE 8. **COMPARISON CHART FOR OLD TO NEW DECORATION CASES.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2021-785)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:41Z
Check the source to verify that this is the current version before use.