| NOT MEASUREMENT SENSITIVE |

MIL-P-14636C
2 October 1992
SUPERSEDING
MIL-P-14636B
6 October 1975

MILITARY SPECIFICATION

PLAQUE, DISPLAY AND WALL, GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers display and wall plaques used by the Department of the Army and the Department of the Air Force.

1.2 Classification. Plaques covered by this specification shall be as specified herein and on the applicable specification sheets (see 2.1, 3.1, 6.2 and supplement 1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

NN-P-71 - Pallets, Material Handling Wood Stringer Construction 2-Way and 4-Way (Partial)
PPP-b-636 - Box, Shipping, Fiberboard

(See Supplement 1 for list of associated Specification sheets)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in preparing this document should be addressed to: Director, The Institute of Heraldry, US Army, Cameron Station, Alexandria, VA 22304-5050, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document.

AMSC N/A FSC 9905
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:42Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-15011 - Pallets, Material Handling, Wood Post Construction, 4-Way Entry

STANDARDS

FEDERAL

FED-STD-595 - Colors

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-147 - Palletized Unit Loads

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from: Standardization Document Order Desk, Building 4D, Section D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

(Copies of specifications, standards, drawings and specification sheets required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Non-Government publications. The following documents form a part of this document to the extend specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM-D-3951 - Standard Practice for Commercial Packaging

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

PANTONE, INCORPORATED

Pantone Matching System

(Application for copies of the Pantone Matching System should be addressed to Pantone, Inc., 55 Knickerbocker Road, Moonachie, N.J. 07074.)

(Non-government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents may also be available in or through libraries or other information services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications or MS standards), the text of this document takes precedence. Nothing in this document however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:42Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable military specification sheet. In the event of any conflict between the requirements of this specification and the military specification sheet, the latter shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subject to first article inspection (see 4.4 and 6.2).

3.3 Standard sample. Unless otherwise specified (see 6.2), the contracting officer shall furnish a standard sample of the plaque which shall be used for matching color and finish only. Variation from this specification may appear in the standard sample; however, in such cases the specification shall govern.

3.4 Materials. Materials shall be as specified herein. Recovered material shall be used to the maximum extent possible.

3.4.1 Plastic. Plastic for the shell shall be a white matte vinyl plastic or styrene. Plastic for the filler shall be any type polyurethane or polystyrene suitable for filling.

3.4.2 Paints. Paints used on the plaques shall be compatible for use on the plastic used. Paints shall be pigmented to the desired shade or color and be weather and mar resistant.

3.5 Design. The design of the plaques shall be an exact replica of the design on the Government furnished cast (see 3.7 and 6.2). The details of the design shall be as specified on the applicable specifications sheet.

3.6 Construction. The plaque shall be constructed in accordance with Figure 1, the applicable specification sheet and the requirements specified herein.

3.6.1 Shell. The shell of the plaque shall be molded or vacuum formed from plastic specified in 3.4.1, having a minimum thickness of 0.020 inch (0.051 cm) or a maximum thickness of 0.040 inch (0.102 cm). The edge depth of the shell shall be 1 inch $\pm$ 1/16 inch (2.54 cm $\pm$ 0.16 cm) and a draft of up to 3/16 inch (0.48 cm) shall be allowed from the front to the back. After molding or vacuum forming is completed, the shell shall be painted using paint specified in 3.4.2. Painted areas shall be as indicated on the applicable specification sheet. At the option of the manufacturer, polyester fiberglass impregnated resin may be used in lieu of the plastic specified above; however, other requirements shall be adhered to. Plaques manufactured using the optional material shall have a commercial type hanging device embedded in the polyester resin material. The requirements for filler and backboard shall not apply if the option is used.

3.6.1.1 Color. The colors of the paint shall be as specified on the applicable specification sheet. Color numbers referenced are from FED-STD-595 or the Pantone Matching System (PMS). Color reference numbers shall not be used to determine degree of gloss. The degree of gloss shall be as specified on the applicable specification sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:42Z
Check the source to verify that this is the current version before use.

3.6.2 Filler. Filler shall be made from polyurethane or polystyrene specified in 3.4.1. The filler shall be foamed in place or fabricated externally and positioned to completely fill all voids between the shell and backboard. As an alternative method of construction, the filler may be a flat polystyrene disc provided the raised portions of the plaques are reinforced with a vacuum formed styrene insert.

3.6.3 Backboard. The backboard shall be fabricated from 1/8 inch ± 1/32 inch (0.32 cm ± 0.08 cm) thick masonite type board. A 3/4 inch + 1/4 inch - 0 (1.91 cm + 0.64 cm - 0) long key hole shall be located on the vertical center line of the board with the top of the key hole located 1-1/2 inch ± 1/4 inch (3.81 cm ± 0.64 cm) below the top of the backboard. After the filler has been inserted in the shell the backboard shall be positioned so the outer finished face is flush with the back edge of the shell and the key hole is located on the vertical center line at the top of the plaque. The backboard shall be glued to the shell around the entire backboard periphery. Filler shall be removed from the area under the key hole to facilitate hanging.

3.7 Government loaned cast. Unless otherwise specified (see 6.2), an actual size plaster cast of the plaque shall be furnished for making the contractor's mold. The cast shall be returned to the Government in good condition at the completion of the contract.

3.8 Marking. In addition to any special marking required by the contract or order (see 5.5 and 6.2), the contractor shall affix his name or trade mark on the back of the finished plaque.

3.9 Workmanship. The plaque shall be clean, well made, and meet the acceptable quality level established by this specification. The paint film shall be uniform in color, continuous, adherent and free from dust, lint or other foreign inclusions. There shall be no bubbles, pits or areas of thin film.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements; however, this does not authorize submission of known defective material, either indicated or actual, not does it commit the Government to accept defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:42Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in 4.5.

4.4 First article sample inspection. Inspection and testing of the first article sample (see 3.2), shall be made of a completely finished plaque for all provisions of this specification applicable to the end product examination and tests.

4.5 Quality conformance inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated (see 6.4).

4.5.1 End item inspection.

4.5.1.1 Visual examination of the plaque. Defects found during the examination shall be classified in accordance with 4.5.1.1.1 and 4.5.1.1.2. The lots shall be inspected in accordance with 4.5.1.1.3. The unit of product for the examinations in 4.5.1.1.1 and 4.5.1.1.2 shall be one completely finished plaque.

4.5.1.1.1 Examination for defects in design, colors, material, construction and workmanship. Examinations shall be made from a distance of 16 to 22 inches under lumination equal to average daylight. The plaques to be examined shall be arranged in a manner to avoid as much reflected light as possible. Defects designated by an asterisk (*) shall be classified as major when seriously affecting appearance or serviceability and minor when affecting appearance or serviceability but not seriously.

TABLE I. DEFECTS

EXAMINE	DEFECT	CLASSIFICATION Major	(*)	Minor
Design	Design altered, i.e., does not conform to Government furnished cast.....	x	-	-
	Any warp, twist or distortion producing an irregular surface, contour or outline.....	x	-	-
	Any detail reduced or obliterated.....	x	-	-
	Detail not completely brought up during the molding operation.....	-	*	-
Material	Not as specified or component missing.....	x	-	-
	The vinyl plastic or styrene does not have white matte finish.....	-	*	-
Painting	Poor match to standard sample, i.e., not shaded to extent indicated or excessively shaded.....	-	*	-
	Paints not proper color.....	x	-	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:42Z
Check the source to verify that this is the current version before use.

TABLE III. DEFECTS (Continued)

EXAMINE	DEFECT	CLASSIFICATION Major	(*)	Minor
	Areas of no film	x	-	-
	Areas of thin film	-	*	-
	Bubbles, lumps or foreign inclusions in the paint	-	*	-
	Skips or overruns	-	*	-
	Peeling or flaking	x	-	-
	Not thoroughly dry; any evidence of tackiness in finished plaque	-	*	-
Construction and Workmanship	Filler or backboard missing	x	-	-
	Filler does not completely fill the area between the backboard and vinyl shell	-	-	x
	Backboard not glued to the shell around the complete periphery	-	-	x
	Open area between the shell and the backboard	-	*	-
	Key hole missing from the backboard	x	-	-
	Backboard mispositioned visually, key hole not located at the top of the plaque	x	-	-
	Filler not removed beneath key hole	-	-	x
	Backboard damaged, dented or split	-	*	-
	Tear, cut, hole, crack or break	x	-	-
	Deep gouge, scratch, crease or wrinkle	-	*	-
	Excess glue on face of plaque	-	*	-
	Finish not in accordance with standard sample	x	-	-
	Any spot, stain or foreign matter which requires a cleaning agent for removal	-	*	-
Marking	Missing, illegible, not located as specified.	-	-	x

4.5.1.1.2 Examination for defects in dimensions. Any dimension which is not within the specified tolerance shall be classified as a defect.

4.5.1.1.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and the acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

	Inspection Level	AQL Major	AQL Total
For defects applicable to 4.5.1.1.1	II	2.5	10.0
For defects applicable to 4.5.1.1.2	S-2	(one class)	4.0

4.5.2. End item testing. Testing of the completely finished plaque shall be performed in accordance with Table I for the characteristics shown therein. The sample unit shall be one plaque. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units. Requirements are applicable to the individual unit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:42Z
Check the source to verify that this is the current version before use.

4.5.3 Examination for count of plaques for intermediate containers. Plaques packaged for shipment shall be examined to determine conformance with package markings and specified quantity. The sample unit for this examination shall be one box (interior package). The lot size shall be the number of intermediate containers. Any box containing less than the specified marked quantity of plaques shall be classified as a defect. The inspection level shall be S-2 and the AQL shall be 2.5 defects per sample unit.

4.5.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

EXAMINE	DEFECT
Marking (exterior & interior)	Omitted, incorrect, illegible, or improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners or container flaps, loose strapping or taping, inadequate strapping. Bulging or distortion of containers.
Weight or Content (exterior & interior)	Number of intermediate containers is more or less than required; gross/net weight exceeds requirements.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or Commercial, as specified (see 6.2).

5.2 Packaging. Each plaque shall be level A, Level C or Commercial, as specified (See 6.2).

5.2.1 Level A. Each plaque shall be wrapped in no less than three thickness of tissue paper having a minimum basis weight of 12 pounds per ream and shall be packaged in a snug-fitting fiberboard box conforming to style OPF, Type CF or SF, Class weather-resistant of PPP-B-636. Closure shall be in accordance with the appendix of the container specification.

5.2.2 Commercial. Plaques packaged as specified in 5.1 shall be packed in accordance with the applicable requirements of ASTM-D-3951.

5.3 Packing. Packing shall be Level A, Level B, Level C or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:42Z
Check the source to verify that this is the current version before use.

5.3.1 Level A. Twenty-four plaques, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to Type CF or SF, Class weather-resistant of PPP-B-636. Closure shall be in accordance with the appendix of the container specification.

5.3.2 Level B. Twenty-four plaques, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to Type CF or SF, Class domestic, Grade 200 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification.

5.3.3 Commercial. Plaques packaged as specified in 5.1 shall be packed in accordance with the applicable requirements of ASTM-D-3951.

5.4 Palletization. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be palletized on a 4-way entry pallet in accordance with load Type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, Type I, Class 1, Style 1, Size A, Wood Group I, II, III or IV of MIL-P-15011, or, 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, Wood Group I, II, III or IV, Grade A of NN-P-71. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.5 Marking. In addition to any special marking required by the contract or order, unit packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Plaques covered by this specification are intended to be used for display purposes.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification.

b. Title, number and date of the applicable specification sheet (See 1.2 and 2.1)

c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (See 2.1).

d. Whether a standard sample is to be furnished (See 3.3).

e. When a first article is not required (See 3.2).

f. When a Government cast will not be furnished (See 3.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:42Z
Check the source to verify that this is the current version before use.

g. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

h. When palletization is required (see 5.3).

6.3 Samples. For access to standard samples, address the contracting activity issuing the invitation for bids.

6.4 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item should be a preproduction sample, a first production sample or a standard production item from the contractor's current inventory as specified in 4.4. The first article should consist of one completed plaque. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or tests, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Government-loaned property. The contracting officer should arrange to loan the property listed in 3.7.

6.6 Subject term (key word) listing.

Cast
Seal

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - IH
Air Force - 11

Review activities:
Army - GL
Air Force - 82, 99
DLA - CT

User activity:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 9905-0319)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:42Z
Check the source to verify that this is the current version before use.

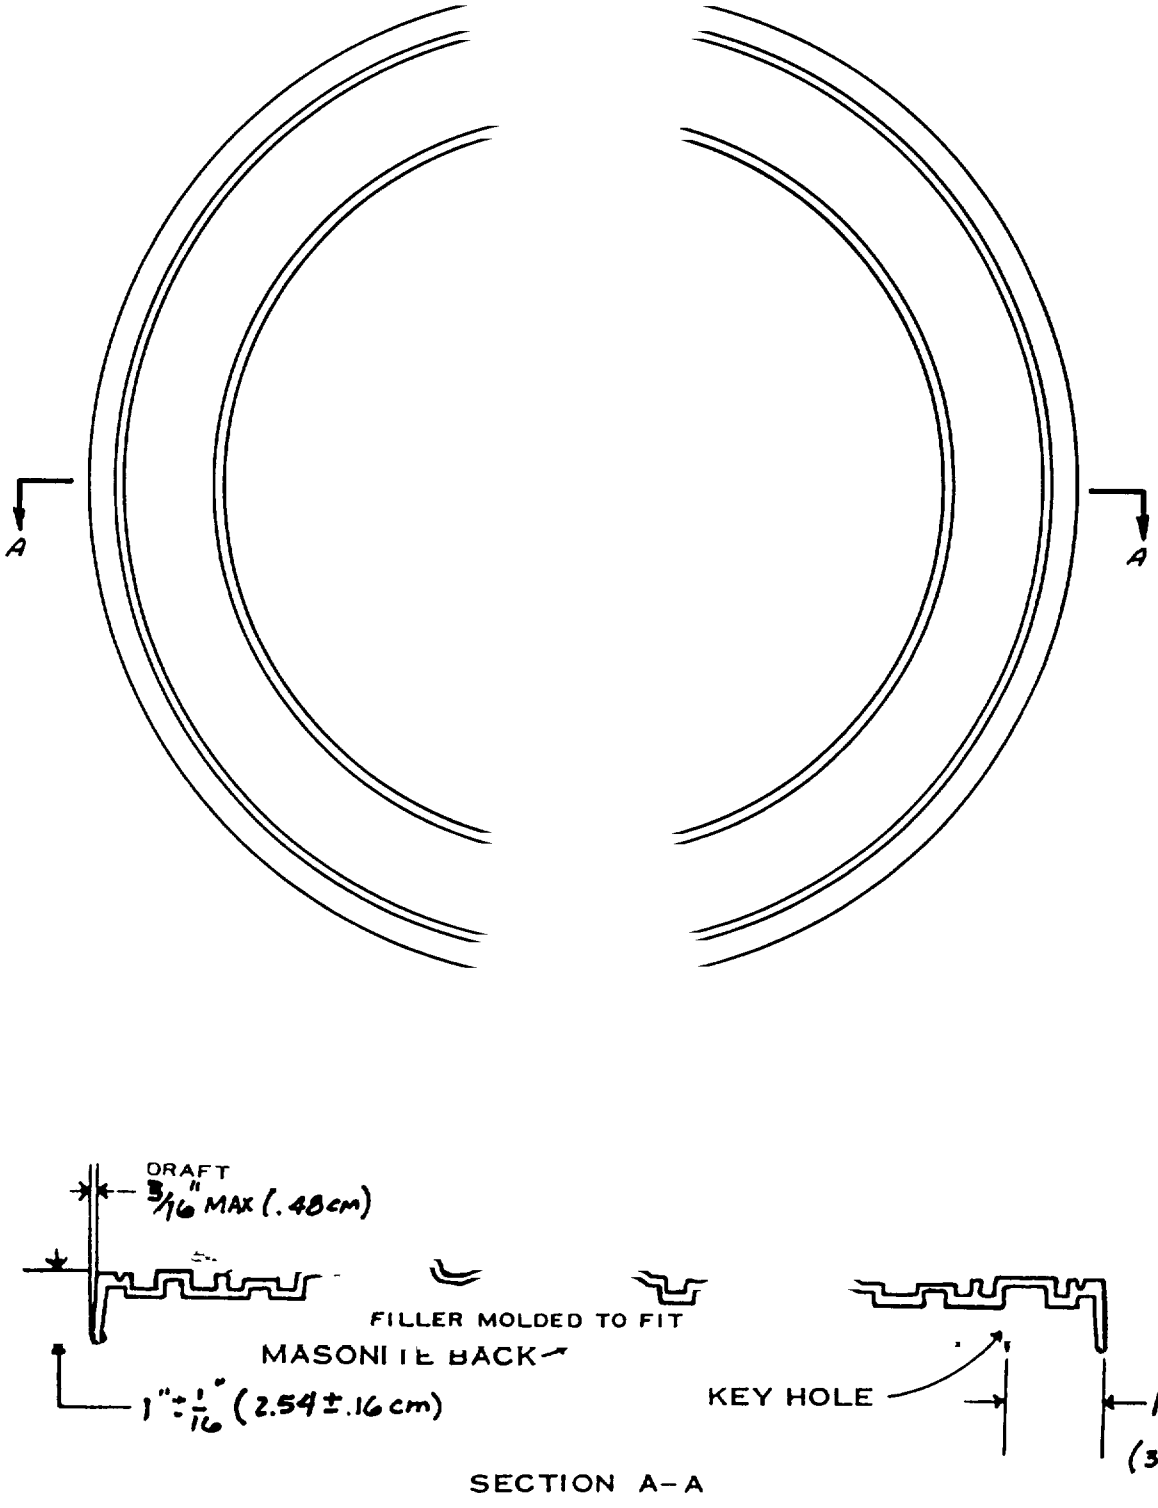


FIGURE 1. Plaque Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE.

1. DOCUMENT NUMBER
MIL-P-14636C

2. DOCUMENT DATE (YYMMDD)
921002

3. DOCUMENT TITLE
PLAQUE, DISPLAY AND WALL, GENERAL SPECIFICATION FOR

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)

b. ORGANIZATION

c. ADDRESS (Include Zip Code)

d. TELEPHONE (Include Area Code)
(1) Commercial
(2) AUTOVON (If applicable)

7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a NAME
The Institute of Heraldry

b TELEPHONE (*Include Area Code*)
(1) Commercial: (202) 274-6636
(2) AUTOVON: 284-6636

c. ADDRESS (*Include Zip Code*)
Bldg 15, Technical & Production Division
Cameron Station
Alexandria, VA 22304-5050

IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT.
Defense Quality and Standardization Office
5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466
Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:42Z
Check the source to verify that this is the current version before use.