INCH-POUND

MS27633B
22 October 2009
SUPERSEDING
MS27633A
29 September 2000

DETAIL SPECIFICATION SHEET

# ELBOW SUB ASSEMBLY, FLARELESS, 45º, SWIVEL NUT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83296.

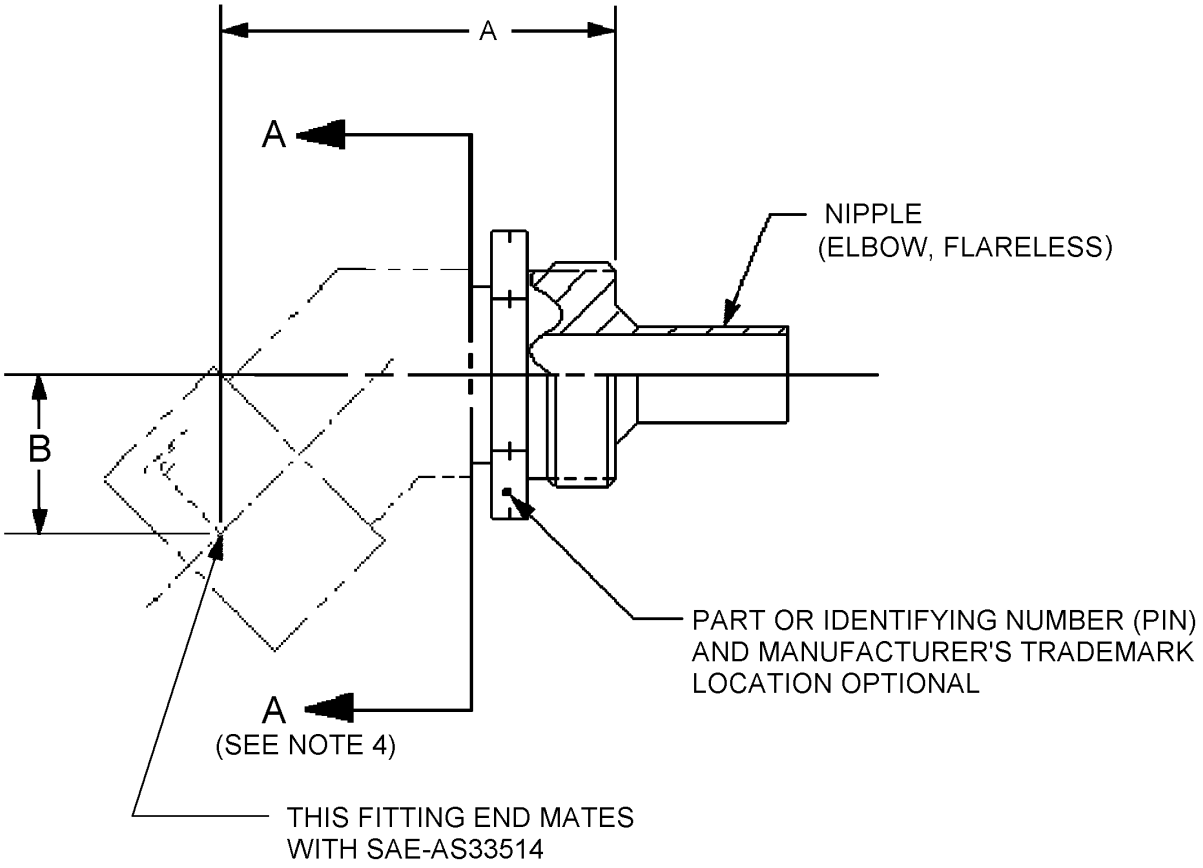


FIGURE 1. Flareless, 45°, elbow sub assembly.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.

| PIN | Union | Wire | Nipple | A inch (mm) | B inch (mm) |
|---|---|---|---|---|---|
| MS27633-4C | MS27624-4C | MS27625-4C | MS27637-4C | 1.519 (38.58) | .515 (13.08) |
| MS27633-6C | MS27624-6C | MS27625-6C | MS27637-6C | 1.840 (46.74) | .683 (17.35) |
| MS27633-8C | MS27624-8C | MS27625-8C | MS27637-8C | 2.179 (55.35) | .761 (19.33) |
| MS27633-10C | MS27624-10C | MS27625-10C | MS27637-10C | 1.824 (46.33) | .756 (19.20) |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Dimensioning and tolerancing are in accordance with ASME Y14.5M.
4. Any design of adapter component to the left of plane A-A is acceptable provided that dimensions A and B meet the requirements and notes of this specification sheet, and the requirements of MIL-DTL-83296 are met.

FIGURE 1. Flareless, 45°, elbow sub assembly - Continued.

REQUIREMENTS:

Dimensions and configurations: The design, construction, and physical dimensions shall be in accordance with MIL-DTL-83296 and figure 1, in case of conflict between this specification sheet and MIL-DTL-83296, this specification sheet shall govern.

This part for use with MIL-DTL-83298 hose and hose assemblies in accordance with MIL-DTL-32330.

Material: Material shall be corrosion resistant steel (CRES).

Sizes -4 thru -8 shall have a forged design (tolerance ±.020 (0.51 mm)). Size -10 shall have a bent tube design (tolerance ±.035 (0.89 mm)).

Finish: Finish shall be passivated in accordance with MIL-DTL-83296.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.

PIN example:




PIN example: MS27633-4C indicates a 45° elbow sub-assembly 1/4 inch, CRES.

Changes from previous issue. Marginal notations are not used in this revision to identify changes due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-83296, this document references the following:

| | |
|---|---|
| MIL-DTL-32330 | ASME Y14.5M |
| MIL-DTL-83298 | SAE-AS33514 |
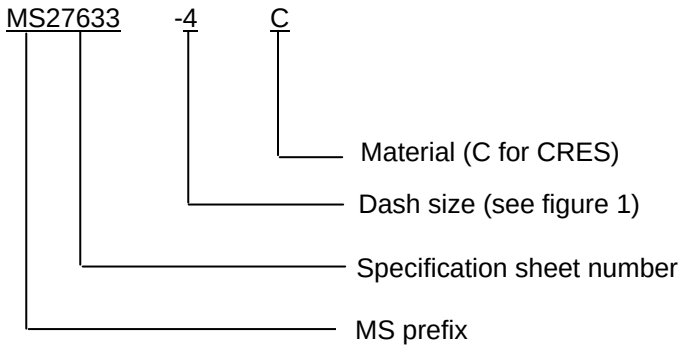
## CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2008-063)

Review activities:
Navy - MC, SA
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:46Z
Check the source to verify that this is the current version before use.