FED. SUP CLASS
4730

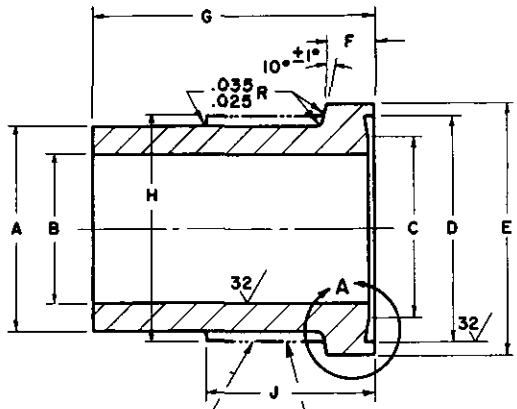

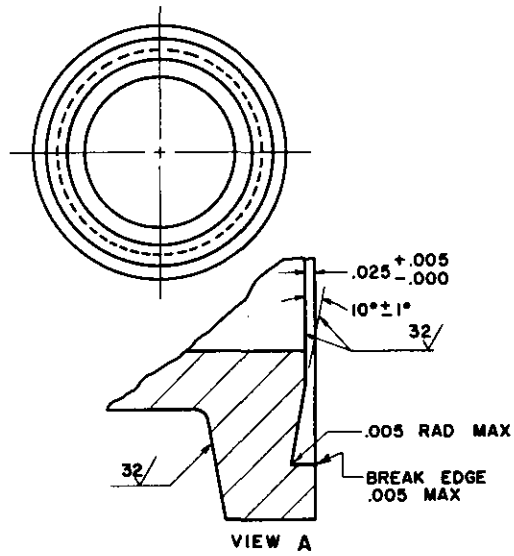

MS PART NO.	TUBE O.D.	A DIA	B DIA ±.002	C DIA +.000 -.010	D DIA +.002 -.000	E DIA +.002 -.007	F ±.005	G	H DIA +.005 -.000	J ±.031	APPROX. WEIGHT LB/EA
MS27853-02	1/8	.125±.002	.083	.156	.350	.500	.313	1.125	.217	.440	
MS27853-04	1/4	.250±.003	.178	.260	.452	.582	.280	1.125	.319	.467	.027
MS27853-06	3/8	.375±.003	.275	.372	.564	.694	.258	1.250	.431	.503	.039
MS27853-08	1/2	.500±.004	.368	.470	.666	.805	.267	1.250	.533	.531	.057
MS27853-12	3/4	.750±.004	.558	.694	.888	1.045	.263	1.375	—	—	.104
MS27853-16	1	1.000±.005	.730	.904	1.100	1.235	.225	1.375	—	—	.163

1. ALL DIAMETERS SHALL BE CONCENTRIC WITHIN .005 FIR.
2. MATERIAL: CORROSION RESISTANT STEEL AMS 5646.
3. CLEANING: FINISHED PARTS SHALL BE CLEANED PER MIL-F-27417.
4. SURFACE TEXTURE IN ACCORDANCE WITH USAS B46.1, UNLESS OTHERWISE SPECIFIED, ALL MACHINED SURFACES TO BE 63 MICROINCHES.
5. BREAK EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
6. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±5°.
7. DO NOT USE UNASSIGNED PART NUMBERS.
8. REFER TO MS27851 FOR ASSEMBLY.
   FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
   REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

CANCELLED AFTER 16 JULY 1980. NO SUPERCEEDING STANDARD

APPROVED 14 JULY 1967 REVISED 16 July 1980

Review activities: 11, 14, 19, 69, 85, 8 NAS

This standard has been approved by the Department of the AIR FORCE and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF 12 Other Cust	TITLE FLANGE, PLAIN, CRES, FLUID CONNECTION FITTING, HIGH PRESSURE	MILITARY STANDARD MS27853 (USAF)
PROCUREMENT SPECIFICATION MIL-F-27417	SUPERSEDES.	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:52Z
Check the source to verify that this is the current version before use.