FED. SUP CLASS
6685

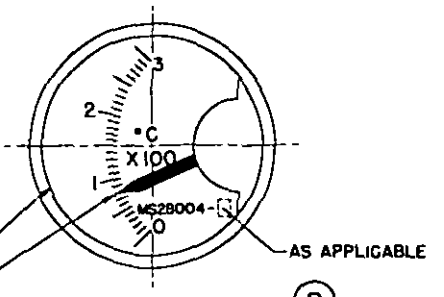

MS28004-1 AND -3 (B)

DIAL AND POINTER SHOWN FOR REFERENCE ONLY, SEE APPLICABLE PROCUREMENT SPECIFICATION FOR DETAIL REQUIREMENTS.

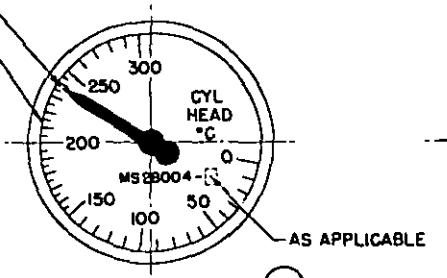

MS28004-2 AND -4 (B)

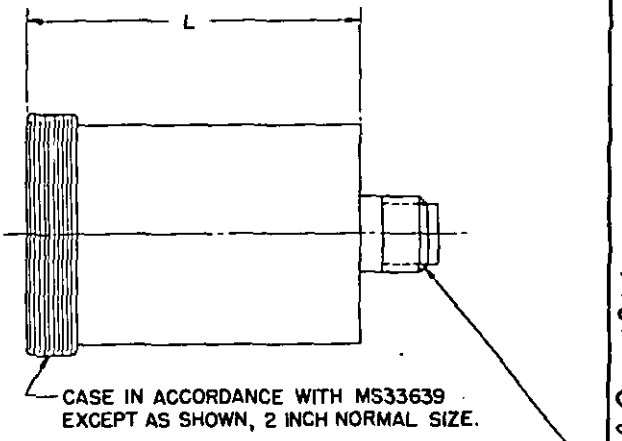

CASE IN ACCORDANCE WITH MS33639 EXCEPT AS SHOWN, 2 INCH NORMAL SIZE.

ELECTRICAL RECEPTACLE IN ACCORDANCE WITH MS33678-10SL-3P. LOCATE ON VERTICAL AND HORIZONTAL CENTERLINE. POLARIZING PIN SHALL BE LOCATED AT TOP CENTER OF RECEPTACLE.

(B)

MS PART NO. DIAL MARKINGS	APPROXIMATE SCALE LENGTH DEGREES	CASE LENGTH L	PROCUREMENT SPECIFICATION
MS28004-1 FLUORESCENT MS28004-3 LUSTERLESS WHITE	100	$2\frac{3}{4}\,^{+\frac{1}{4}}_{-\frac{1}{4}}$	MIL-I-7112
MS28004-2 FLUORESCENT MS28004-4 LUSTERLESS WHITE	260	$3\frac{3}{4}\,^{+\frac{1}{4}}_{-\frac{1}{4}}$	MIL-I-6681

DIMENSIONS IN INCHES

NOTES:

1. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
2. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 28 FEB 51 REVISED (A) 12 JUN 53 (B) 28 Oct 1966

REVIEWER ACTIVITIES: ARMY-MO, NAVY-WP, AIR FORCE-11,67

USER ACTIVIES: ARMY-GL

THIS MILITARY STANDARD HAS BEEN APPROVED BY THE DEPARTMENT OF DEFENSE AND IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. 67 Other Cust WP MO	TITLE INDICATOR-TEMPERATURE, ELECTRICAL RESISTANCE, CYLINDER HEAD, 0-300° C	MILITARY STANDARD MS28004
PROCUREMENT SPECIFICATION SEE TABLE	SUPERSEDES:	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:55Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 63 672-1 (Coordinated)

EDITION OF 1 SEP 57 MAY BE USED.