FED. SUP CLASS
6610

CASE IN ACCORDANCE WITH MS33638, 3 INCH SIZE CASE *EXCEPT AS SHOWN*

3 HOLES EQUALLY SPACED ON 4 HOLE SPACING

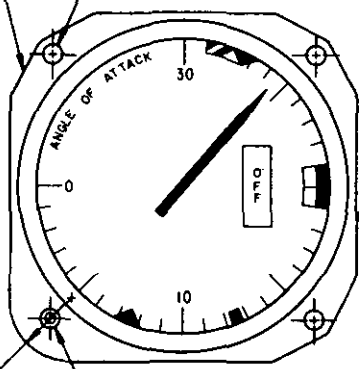

.593 / .531 R

DIAL READING AT 3 O'CLOCK *ADJUSTABLE BY MEANS OF* EXTERNAL HEXAGON WRENCH 3/32 ACROSS FLATS

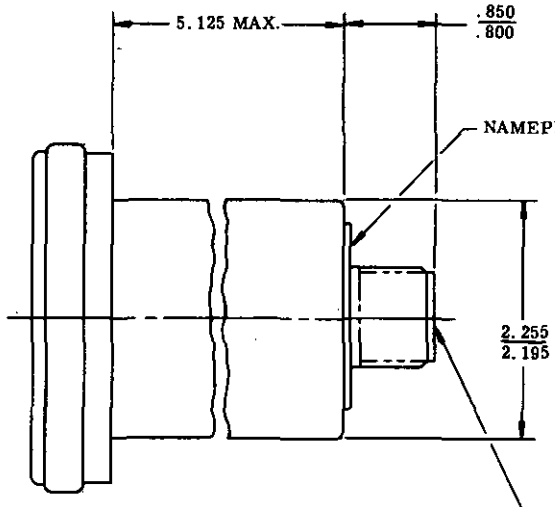

ELECTRICAL CONNECTOR TO MATE WITH MS3106-20-29S. CONNECTOR LOCATED ON VERTICAL AND HORIZONTAL CENTERLINES.

PART NO.	*WEIGHT*
MS28062-1	1.8 LBS. MAX

NOTES:

1. *DIMENSIONS IN INCHES.*
2. DIAL AND INDICES SHOWN FOR REFERENCE ONLY. SEE PROCUREMENT SPECIFICATION FOR DETAIL REQUIREMENTS.

(C) INACTIVE FOR DESIGN AFTER DEC.68 , NO SUPERSEDING STANDARD. USE ONLY FOR REPLACEMENT OF IDENTICAL ITEMS IN EXISTING MILITARY EQUIPMENT.

(D) **CANCELLED** 27 JUNE 1978 **SUPERSEDED BY MS28067**

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) ENTIRE STANDARD REVISED AND REDRAWN

APPROVED 8 JUNE 1955 REVISED (A) 8 DECEMBER 1955 (B) 2 MAY 1960 (C) 31 MARCH 1969 (D) 27 JUN 1978

This military standard is approved by the NAVAL AIR SYSTEMS COMMAND Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY – AS Other Cus.	TITLE: INDICATOR, ANGLE OF ATTACK, 2-3/4 DIAL, 28 VOLT D.C.	MILITARY STANDARD MS28062 (AS)
PROCUREMENT SPECIFICATION: MIL-I-18856 (AS)	SUPERSEDES: MS28062(WEP)	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 17709

☆ U.S. GOVERNMENT PRINTING OFFICE: 1978-703-122/3475

Source: https://assist.dla.mil -- Downloaded: 2026-0-23T16:56Z
Check the source to verify that this is the current version before use.